3RT2045-3AL20-1AA0

## **Data sheet**



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 230 V AC, 50/60 Hz, auxiliary contacts: 1 NO + 1 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S3, upright mounting position

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S3
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	15.9 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	5.3 W
without load current share typical	25 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	1 000 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	8 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	10.3g / 5 ms, 6,.g / 10 ms
shock resistance with sine pulse	
• at AC	16.3g / 5 ms, 10.g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	1 000 V
• at AC-3e rated value maximum	1 000 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated	125 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated	125 A
value	
<ul> <li>up to 690 V at ambient temperature 60 °C rated value</li> </ul>	105 A
• at AC-3	
— at 400 V rated value	80 A
— at 500 V rated value	80 A
— at 690 V rated value	58 A
— at 1000 V rated value	30 A
• at AC-3e	30 A
	90 A
— at 400 V rated value	80 A 80 A
— at 500 V rated value	
— at 690 V rated value	58 A
— at 1000 V rated value	30 A
• at AC-4 at 400 V rated value	66 A
• at AC-5a up to 690 V rated value	110 A
at AC-5b up to 400 V rated value	80 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	80 A
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	80 A
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	80 A
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	58 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	54 A
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	54 A
<ul> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	54 A
<ul> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	54 A
minimum cross-section in main circuit at maximum AC-1 rated	50 mm <sup>2</sup>
value operational current for approx. 200000 operating cycles at	
AC-4	
• at 400 V rated value	34 A
• at 690 V rated value	24 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	60 A
— at 110 V rated value	9 A
— at 220 V rated value	2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.4 A
with 2 current paths in series at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
	10 A
— at 220 V rated value	
— at 440 V rated value	1.8 A
— at 600 V rated value	1 A
with 3 current paths in series at DC-1	400 A
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	80 A
— at 440 V rated value	4.5 A

	— at 600 V rated value	2.6 A
= 8.6 V rated value	• at 1 current path at DC-3 at DC-5	
= 11 10 V Intels value	— at 24 V rated value	40 A
	— at 60 V rated value	6 A
### ### ### ### ### ### ### ### ### ##	— at 110 V rated value	2.5 A
With 2 current paths in series at DC-3 at DC-5	— at 220 V rated value	1 A
### with 2 current paths in series at DC-3 at DC-5  — at 24 V rated value — at 10 V rated value — at 20 V rated value — at 20 V rated value — at 40 V rated value — at 40 V rated value — at 40 V rated value — at 60 V rated value — at 70 V rated value — at 10 V rated value — at 10 V rated value — at 10 V rated value — at 20 V rated value — 37 kW  operating power  • at AC-2 at 400 V rated value — at 200 V rated value — at 800 V rated value — at 400 V rated value — at 400 V rated value — at 400 V rated value — at 600 V rated value — at 100 V rated value — at 800 V rated value — at 800 V rated value — at 900 V rated value — at 800 V rated value — at 800 V rated value — at 900 V rated value — at 900 V rated value — at 800 V rated value — at 900 V rated value — at 900 V rated value — at 800 V rated value — at 900 V rated value — at 900 V rated value — at 800 V rated value — at 900 V rated value — at 900 V rated value — at 800 V rated value — a	— at 440 V rated value	0.15 A
	— at 600 V rated value	0.06 A
	<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
	— at 24 V rated value	100 A
- at 220 V rated value - at 600 V rated value 0.42 A 0.16 A  **with 3 current paths in series at DC-3 at DC-5 - at 24 V rated value 100 A - at 110 V rated value 100 A - at 110 V rated value 100 A - at 110 V rated value 100 A - at 120 V rated value 20 V rated value 35 A - at 440 V rated value 35 A - at 440 V rated value 37 kW  **at AC-3 - at 230 V rated value 22 kW - at 230 V rated value 37 kW - at 560 V rated value 37 kW - at 660 V rated value 37 kW - at 660 V rated value 37 kW - at 660 V rated value 37 kW - at 400 V rated value 37 kW - at 560 V rated value 37 kW - at 900 V rated value 38 kW - at 900 V rated value 38 kW - at 900 V rated value 39 kW - at 900 V rated value 30 V rated value 30 V rated value 40 V rated value 41 kW - at 900 V rated value 42 kW - at 900 V rated value 42 kW - at 900 V rated value 43 kW - at 900 V rated value 44 kW - at 900 V rated value 45 kW - at 900 V for current peak value n=20 rated value 40 vp to 400 V for current peak value n=20 rated value 40 vp to 400 V for current peak value n=20 rated value 40 vp to 400 V for current peak value n=20 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for	— at 60 V rated value	100 A
	— at 110 V rated value	100 A
and the second section of the secti	— at 220 V rated value	7 A
with 3 current paths in series at DC-3 at DC-5	— at 440 V rated value	0.42 A
		0.16 A
	<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
- at 110 V rated value	— at 24 V rated value	100 A
at 220 V rated value	— at 60 V rated value	100 A
	— at 110 V rated value	
operating power  at AC-3  — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value — at 690 V rated value — at 230 V rated value — at 300 V rated value — at 400 V rated value — at 500 V rated value — at 690 V for current peak value n=20 rated value — at 690 V for current peak value n=20 rated value — up to 500 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 500 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current	— at 220 V rated value	35 A
operating power  at AC-2 at 400 V rated value  at AC-3  — at 230 V rated value  — at 400 V rated value  — at 690 V rated value  — at 690 V rated value  — at 1000 V rated value  — at 1000 V rated value  — at 230 V rated value  — at 230 V rated value  — at 1000 V rated value  — at 400 V rated value  — at 690 V rated value  — at 690 V rated value  — at 400 V rated value  — at 690 V rated value  — at 690 V rated value  — at 690 V rated value  — at 1000 V rated value  — at 690 V rated value  9 to 200 V for current peak value n=20 rated value  • up to 230 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V f	— at 440 V rated value	0.8 A
at AC-2 at 400 V rated value at AC-3  — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 1000 V rated value — at 1000 V rated value — at 1000 V rated value — at 230 V rated value — at 400 V rated value — at 400 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value — at 690 V rated value — at 1000 V rated value — 25 kW  operating power for approx. 200000 operating cycles at AC-4  4 at 400 V rated value  operating apparent power at AC-8a  up to 230 V for current peak value n=20 rated value  up to 500 V for current peak value n=20 rated value  up to 500 V for current peak value n=20 rated value  up to 500 V for current peak value n=20 rated value  up to 400 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  40 F kVA  51 kVA  52 kW  53 kVA  54 kW  55 kVA  56 kVA  57 kVA  58 kVA  58 kVA  59 kVA  69 kVA  69 kVA  69 kVA  69 kVA  60 kVA  60 kVA  61 kVA  63 kVA  64 f kVA  65 kVA  66 f kVA  66 f kVA  67 kVA  68 kVA  68 kVA  69 kVA	— at 600 V rated value	0.35 A
at AC-3  at 230 V rated value  at 400 V rated value  at 500 V rated value  at 690 V rated value  at 1000 V rated value  at 1000 V rated value  at AC-3e  at 230 V rated value  at AC-3e  at 230 V rated value  at 400 V rated value  at 500 V rated value  55 kW  at 1000 V rated value  21.8 kW  operating apparent power at AC-6a  up to 230 V for current peak value n=20 rated value  up to 800 V for current peak value n=20 rated value  up to 690 V for current peak value n=20 rated value  up to 690 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  46.5 kVA  short-time withstand current in cold operating state up to  40 °C  ilimited to 1 s switching at zero current maximum  ilimited to 60 s switching at zero current maximum  ilimited to 60 S switching at zero current maximum  ilimited to 60 S switching at zero current maximum  ilimited to 60 S switching at zero current maximum  ilimited to 60 S switching at zero current maximum  ilimited to 60 S switching at zero current maximum  ilimited to 60 S switching at zero current maximum	operating power	
- at 230 V rated value - at 400 V rated value - at 590 V rated value - at 590 V rated value - at 590 V rated value - at 1000 V rated value - at 230 V rated value - at 1000 V rated value - at 230 V rated value - at 230 V rated value - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 590 V rated value - at 590 V rated value - at 590 V rated value - at 1000 V rated value - at 400 V rated value - at 400 V rated value - at 400 V rated value - at 690 V rated value - at 500 V rated value - at 690 V rated value - at 500 V rated value - at 690 V rated	<ul> <li>at AC-2 at 400 V rated value</li> </ul>	37 kW
- at 400 V rated value - at 690 V rated value - at 1000 V rated value - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 690 V ra	• at AC-3	
- at 500 V rated value	— at 230 V rated value	22 kW
- at 690 V rated value - at 1000 V rated value  at AC-3e - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 690 V rated value - at 400 V rated value - at 690 V rated value - at 400 V rated value - at 400 V rated value - at 690 V	— at 400 V rated value	37 kW
- at 1000 V rated value  • at AC-3e  - at 230 V rated value  - at 400 V rated value  - at 500 V rated value  - at 500 V rated value  - at 690 V rated value  • up to 230 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 600 V for current peak value n=30 rated value  • up to 600 V for current peak value n=30 rated value  • up to 600 V for current peak value n=30 rated value  • up to 600 V for current peak value n=30 rated value  • up to 600 V for current peak value n=30 rated value  • up to 600 V for current peak value n=30 rated value  • up to 600 V for current peak value n=30 rated value  • up to 600 V for current peak value n=30 rated value  • up t	— at 500 V rated value	45 kW
at AC-3e  — at 230 V rated value — at 400 V rated value — at 690 V rated value — at 1000 V rated value — at 1000 V rated value — at 1000 V rated value — at 690 V rated value  • at 400 V rated value • at 690 V rated value • at 690 V rated value — at 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • 1500 A; Use minimum cross-section acc. to AC-1 rated value • limited to 10 s switching at zero current maximum • limited to 50 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum	— at 690 V rated value	55 kW
- at 230 V rated value - at 400 V rated value - at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 400 V rated value - at 400 V rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=30 rated value - at 690 V for current p	— at 1000 V rated value	37 kW
- at 400 V rated value - at 500 V rated value - at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 400 V rated value - at 690 V rated value - at 690 V rated value - at 690 V rated value - up to 230 V for current peak value n=20 rated value - up to 230 V for current peak value n=20 rated value - up to 500 V for current peak value n=20 rated value - up to 690 V for current peak value n=20 rated value - up to 690 V for current peak value n=20 rated value - up to 230 V for current peak value n=20 rated value - up to 230 V for current peak value n=30 rated value - up to 400 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 690 V for current peak value n=30 rated value	• at AC-3e	
- at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 1000 V rated value - at 1000 V rated value  operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 50 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum	— at 230 V rated value	
- at 690 V rated value - at 1000 V rated value 37 kW  operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum	— at 400 V rated value	
operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 400 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for surrent peak value n=30 rated value • up to 500 V for surrent peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum		
operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum		
at 400 V rated value at 690 V rated value 21.8 kW  operating apparent power at AC-6a  up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current in cold operating state up to 40 °C  ilmited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum		37 kW
<ul> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=20 rated value</li> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>up to 230 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>46.7 kVA</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>46.5 kVA</li> </ul> Short-time withstand current in cold operating state up to 400 °C <ul> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> </ul>		
at 690 V rated value  operating apparent power at AC-6a  up to 230 V for current peak value n=20 rated value  up to 400 V for current peak value n=20 rated value  up to 500 V for current peak value n=20 rated value  up to 690 V for current peak value n=20 rated value  up to 230 V for current peak value n=30 rated value  up to 230 V for current peak value n=30 rated value  up to 400 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 500 V for current peak value n=30 rated value  up to 690 V for current peak value n=30 rated value  up to 690 V for current peak value n=30 rated value  up to 690 V for current peak value n=30 rated value  ilmited to 1 s switching at zero current maximum  ilmited to 10 s switching at zero current maximum  ilmited to 30 s switching at zero current maximum  ilmited to 30 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum  ilmited to 60 s switching at zero current maximum		17 9 kW
operating apparent power at AC-6a     oup to 230 V for current peak value n=20 rated value     oup to 400 V for current peak value n=20 rated value     oup to 500 V for current peak value n=20 rated value     oup to 690 V for current peak value n=20 rated value     oup to 690 V for current peak value n=20 rated value     oup to 230 V for current peak value n=30 rated value     oup to 400 V for current peak value n=30 rated value     oup to 500 V for current peak value n=30 rated value     oup to 500 V for current peak value n=30 rated value     oup to 690 V for current peak value n=30 rated value     oup to 6		
<ul> <li>up to 230 V for current peak value n=20 rated value</li> <li>up to 400 V for current peak value n=20 rated value</li> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> <li>operating apparent power at AC-6a</li> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> </ul>		21.6 (1)
• up to 400 V for current peak value n=20 rated value  • up to 500 V for current peak value n=20 rated value  • up to 690 V for current peak value n=20 rated value  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching frequency		31 kVA
up to 500 V for current peak value n=20 rated value     up to 690 V for current peak value n=20 rated value     operating apparent power at AC-6a     up to 230 V for current peak value n=30 rated value     up to 400 V for current peak value n=30 rated value     up to 500 V for current peak value n=30 rated value     up to 690 V for current peak value n=30 rated value     up to 690 V for current peak value n=30 rated value     up to 690 V for current peak value n=30 rated value     inited to 1 s switching at zero current maximum     ilmited to 5 s switching at zero current maximum     ilmited to 10 s switching at zero current maximum     ilmited to 10 s switching at zero current maximum     ilmited to 30 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum     ilmited to 60 s switching at zero current maximum	·	
up to 690 V for current peak value n=20 rated value      operating apparent power at AC-6a         up to 230 V for current peak value n=30 rated value         up to 400 V for current peak value n=30 rated value         up to 500 V for current peak value n=30 rated value         up to 690 V for current peak value n=30 rated value         up to 690 V for current peak value n=30 rated value         short-time withstand current in cold operating state up to 40 °C          Ilmited to 1 s switching at zero current maximum         Ilmited to 5 s switching at zero current maximum         Ilmited to 10 s switching at zero current maximum         Ilmited to 30 s switching at zero current maximum         Ilmited to 30 s switching at zero current maximum         Ilmited to 60 s switching at zero current maximum         Ilmi		
operating apparent power at AC-6a  • up to 230 V for current peak value n=30 rated value  • up to 400 V for current peak value n=30 rated value  • up to 500 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • up to 690 V for current peak value n=30 rated value  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching frequency		
<ul> <li>up to 230 V for current peak value n=30 rated value</li> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> </ul>		
<ul> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> </ul>		21.5 kVA
<ul> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> <li>short-time withstand current in cold operating state up to 40 °C</li> <li>limited to 1 s switching at zero current maximum</li> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> </ul>		
• up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum		
short-time withstand current in cold operating state up to 40 °C  • limited to 1 s switching at zero current maximum  • limited to 5 s switching at zero current maximum  • limited to 10 s switching at zero current maximum  • limited to 30 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  • limited to 60 s switching at zero current maximum  1 500 A; Use minimum cross-section acc. to AC-1 rated value  538 A; Use minimum cross-section acc. to AC-1 rated value  423 A; Use minimum cross-section acc. to AC-1 rated value		
40 °C  ■ limited to 1 s switching at zero current maximum  ■ limited to 5 s switching at zero current maximum  ■ limited to 10 s switching at zero current maximum  ■ limited to 30 s switching at zero current maximum  ■ limited to 30 s switching at zero current maximum  ■ limited to 60 s switchin		
<ul> <li>limited to 5 s switching at zero current maximum</li> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> </ul>		
<ul> <li>limited to 10 s switching at zero current maximum</li> <li>limited to 30 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>limited to 60 s switching at zero current maximum</li> <li>423 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>no-load switching frequency</li> </ul>	<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	1 500 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>◆ limited to 30 s switching at zero current maximum</li> <li>◆ limited to 60 s switching at zero current maximum</li> <li>No-load switching frequency</li> <li>538 A; Use minimum cross-section acc. to AC-1 rated value</li> <li>423 A; Use minimum cross-section acc. to AC-1 rated value</li> </ul>	<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	1 186 A; Use minimum cross-section acc. to AC-1 rated value
• limited to 60 s switching at zero current maximum  10	<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	851 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	538 A; Use minimum cross-section acc. to AC-1 rated value
	limited to 60 s switching at zero current maximum	423 A; Use minimum cross-section acc. to AC-1 rated value
a at AC	no-load switching frequency	
♥ at AO	• at AC	5 000 1/h
operating frequency	operating frequency	
• at AC-1 maximum 900 1/h	• at AC-1 maximum	900 1/h

	400.4/
• at AC-2 maximum	400 1/h
• at AC-3 maximum	1 000 1/h
• at AC-3e maximum	1 000 1/h
• at AC-4 maximum	300 1/h
Control circuit/ Control	40
type of voltage of the control supply voltage	AC
control supply voltage at AC	000 \
at 50 Hz rated value	230 V
at 60 Hz rated value     operating range factor control supply voltage rated value of	230 V
magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	348 VA
● at 60 Hz	296 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.62
• at 60 Hz	0.55
apparent holding power of magnet coil at AC	
• at 50 Hz	25 VA
• at 60 Hz	18 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.35
• at 60 Hz	0.41
closing delay	
• at AC	13 50 ms
opening delay	
• at AC	10 21 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous	1
	1
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous	
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact	1
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum	1
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	1 10 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15  • at 230 V rated value	1 10 A 6 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value	1 10 A 6 A 3 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value	1 10 A 6 A 3 A 2 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value	1 10 A 6 A 3 A 2 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12	1 10 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value	1 10 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12 • at 24 V rated value • at 48 V rated value	1 10 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 24 V rated value • at 48 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	1 10 A 6 A 3 A 2 A 1 A  10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	1 10 A 6 A 3 A 2 A 1 A  10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 220 V rated value • at 600 V rated value • at 125 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value • at 148 V rated value • at 110 V rated value • at 125 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 10 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 690 V rated value  • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 600 V rated value • at 100 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value • at 30 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 60 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 48 V rated value • at 48 V rated value • at 25 V rated value • at 20 V rated value • at 20 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 720 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 720 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 10 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
number of NC contacts for auxiliary contacts instantaneous contact  number of NO contacts for auxiliary contacts instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value • at 400 V rated value • at 690 V rated value  • at 690 V rated value  operational current at DC-12  • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 600 V rated value • at 100 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value • at 30 V rated value	1 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 10 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A

• at 480 V rated value	77 A	
at 600 V rated value	62 A	
yielded mechanical performance [hp]		
for single-phase AC motor		
— at 110/120 V rated value	7.5 hp	
— at 230 V rated value	15 hp	
• for 3-phase AC motor		
— at 200/208 V rated value	25 hp	
— at 220/230 V rated value	30 hp	
— at 460/480 V rated value	60 hp	
— at 575/600 V rated value	60 hp	
contact rating of auxiliary contacts according to UL	A600 / P600	
Short-circuit protection		
design of the fuse link		
<ul> <li>for short-circuit protection of the main circuit</li> </ul>		
<ul> <li>— with type of coordination 1 required</li> </ul>	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)	
<ul> <li>— with type of assignment 2 required</li> </ul>	gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)	
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)	
Installation/ mounting/ dimensions		
mounting position	standing, on horizontal mounting surface	
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715	
side-by-side mounting	Yes	
height	140 mm	
width	70 mm	
depth	152 mm	
required spacing		
<ul> <li>with side-by-side mounting</li> </ul>		
— forwards	20 mm	
— upwards	10 mm	
— downwards	10 mm	
— at the side	0 mm	
<ul> <li>for grounded parts</li> </ul>		
— forwards	20 mm	
— upwards	10 mm	
— at the side	10 mm	
— downwards	10 mm	
• for live parts		
— forwards	20 mm	
— upwards	10 mm	
— downwards	10 mm	
— at the side	10 mm	
Connections/ Terminals		
type of electrical connection		
for main current circuit	screw-type terminals	
for auxiliary and control circuit	spring-loaded terminals	
at contactor for auxiliary contacts	Spring-type terminals	
of magnet coil	Spring-type terminals	
type of connectable conductor cross-sections for main contacts		
finely stranded with core end processing	2x (2.5 35 mm²), 1x (2.5 50 mm²)	
connectable conductor cross-section for main contacts		
• solid	2.5 16 mm²	
• stranded	6 70 mm²	
• finely stranded with core end processing	2.5 50 mm²	
connectable conductor cross-section for auxiliary contacts		
solid or stranded	0.5 2.5 mm²	
finely stranded with core end processing	0.5 2.5 mm <sup>2</sup>	
finely stranded without core end processing	0.5 2.5 mm²	
type of connectable conductor cross-sections		
• for auxiliary contacts		
•	2x (0.5 2.5 mm²)	
— solid or stranded	2x (0.5 2.5 mm²)	

<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²)
<ul> <li>finely stranded without core end processing</li> </ul>	2x (0.5 2.5 mm²)
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 16)
AWG number as coded connectable conductor cross section	
• for main contacts	10 2
<ul> <li>for auxiliary contacts</li> </ul>	20 14
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
suitability for use safety-related switching OFF	Yes
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Certificates/ approvals

### **General Product Approval**



Confirmation





<u>KC</u>



Functional Safety/Safety of I chinery	a- Declaration of Conformity	Test Certificates
---------------------------------------	------------------------------	-------------------



Type Examination Certificate





Type Test Certificates/Test Report

Special Test Certificate

#### Marine / Shipping











**firmations** 





other	Railway	Dangerous Good	Environment
<u>Confirmation</u>	Vibration and Shock	Transport Information	Environmental Con-

#### Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

 $Information-\ and\ Download center\ (Catalogs,\ Brochures,...)$ 

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2045-3AL20-1AA0

#### Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2045-3AL20-1AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-3AL20-1AA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2045-3AL20-1AA0&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2045-3AL20-1AA0&lang=en</a>


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-3AL20-1AA0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2045-3AL20-1AA0&objecttype=14&gridview=view1







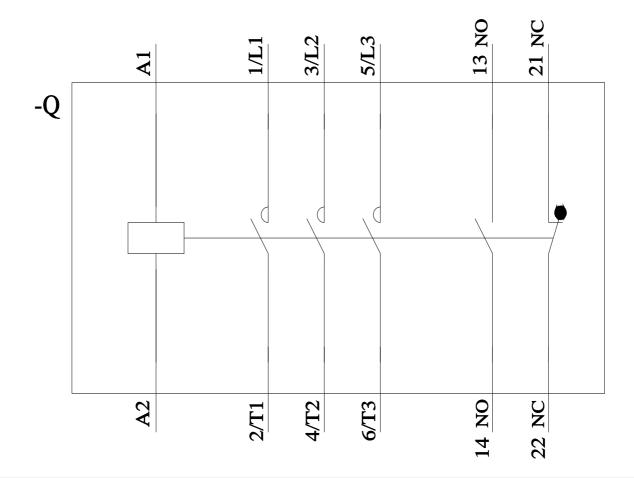

last modified: 8/15/2023 🖸

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20453AL201AA0