SIEMENS

Data sheet 3RT2045-3AV00



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 400 V AC, 50 Hz, auxiliary contacts: 1 NO + 1 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S3 $\,$

product brand name	SIRIUS	
product designation	Power contactor	
product type designation	3RT2	
General technical data		
size of contactor	S3	
product extension		
 function module for communication 	No	
auxiliary switch	Yes	
power loss [W] for rated value of the current		
 at AC in hot operating state 	15.9 W	
 at AC in hot operating state per pole 	5.3 W	
without load current share typical	7.3 W	
insulation voltage		
 of main circuit with degree of pollution 3 rated value 	1 000 V	
 of auxiliary circuit with degree of pollution 3 rated value 	690 V	
surge voltage resistance		
 of main circuit rated value 	8 kV	
of auxiliary circuit rated value	6 kV	
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V	
shock resistance at rectangular impulse		
• at AC	10.3g / 5 ms, 6,.g / 10 ms	
shock resistance with sine pulse		
• at AC	16.3g / 5 ms, 10.g / 10 ms	
mechanical service life (operating cycles)		
 of contactor typical 	10 000 000	
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000	
 of the contactor with added auxiliary switch block typical 	10 000 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	03/01/2017	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
during operation	-25 +60 °C	
during storage	-55 +80 °C	
relative humidity minimum	10 %	
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %	
Main circuit		
number of poles for main current circuit	3	

number of NO contacts for main contacts	3	
operating voltage		
 at AC-3 rated value maximum 	1 000 V	
• at AC-3e rated value maximum	1 000 V	
operational current		
• at AC-1 at 400 V at ambient temperature 40 °C rated	125 A	
value		
• at AC-1		
— up to 690 V at ambient temperature 40 °C rated	125 A	
value		
 up to 690 V at ambient temperature 60 °C rated value 	105 A	
• at AC-3		
— at 400 V rated value	80 A	
— at 500 V rated value	80 A	
— at 690 V rated value	58 A	
— at 1000 V rated value	30 A	
• at AC-3e	30 A	
	90 A	
— at 400 V rated value	80 A 80 A	
— at 500 V rated value		
— at 690 V rated value	58 A	
— at 1000 V rated value	30 A	
• at AC-4 at 400 V rated value	66 A	
• at AC-5a up to 690 V rated value	110 A	
at AC-5b up to 400 V rated value	80 A	
• at AC-6a		
 up to 230 V for current peak value n=20 rated value 	80 A	
 up to 400 V for current peak value n=20 rated value 	80 A	
 up to 500 V for current peak value n=20 rated value 	80 A	
 up to 690 V for current peak value n=20 rated value 	58 A	
• at AC-6a		
 up to 230 V for current peak value n=30 rated value 	54 A	
 up to 400 V for current peak value n=30 rated value 	54 A	
 up to 500 V for current peak value n=30 rated value 	54 A	
 up to 690 V for current peak value n=30 rated value 	54 A	
minimum cross-section in main circuit at maximum AC-1 rated	50 mm ²	
value operational current for approx. 200000 operating cycles at		
AC-4		
• at 400 V rated value	34 A	
• at 690 V rated value	24 A	
operational current		
at 1 current path at DC-1		
— at 24 V rated value	100 A	
— at 60 V rated value	60 A	
— at 110 V rated value	9 A	
— at 220 V rated value	2 A	
— at 440 V rated value	0.6 A	
— at 600 V rated value	0.4 A	
with 2 current paths in series at DC-1		
— at 24 V rated value	100 A	
— at 60 V rated value	100 A	
— at 110 V rated value	100 A	
	10 A	
— at 220 V rated value		
— at 440 V rated value	1.8 A	
— at 600 V rated value	1 A	
with 3 current paths in series at DC-1	400 A	
— at 24 V rated value	100 A	
— at 60 V rated value	100 A	
— at 110 V rated value	100 A	
— at 220 V rated value	80 A	
— at 440 V rated value	4.5 A	

	— at 600 V rated value	2.6 A
= 8.6 V rated value	 at 1 current path at DC-3 at DC-5 	
= 11 10 V Intels value	— at 24 V rated value	40 A
	— at 60 V rated value	6 A
### ### ### ### ### ### ### ### ### ##	— at 110 V rated value	2.5 A
With 2 current paths in series at DC-3 at DC-5	— at 220 V rated value	1 A
### with 2 current paths in series at DC-3 at DC-5 — at 24 V rated value — at 10 V rated value — at 20 V rated value — at 20 V rated value — at 40 V rated value — at 40 V rated value — at 40 V rated value — at 60 V rated value — at 70 V rated value — at 10 V rated value — at 10 V rated value — at 10 V rated value — at 20 V rated value — 37 kW operating power • at AC-2 at 400 V rated value — at 200 V rated value — at 800 V rated value — at 400 V rated value — at 600 V rated value — at 100 V rated value — at 800 V rated value — at 800 V rated value — at 900 V rated value — at 800 V rated value — at 800 V rated value — at 900 V rated value — at 800 V rated value — at 900 V rated value — at 800 V rated value — a	— at 440 V rated value	0.15 A
	— at 600 V rated value	0.06 A
	 with 2 current paths in series at DC-3 at DC-5 	
	— at 24 V rated value	100 A
- at 220 V rated value - at 600 V rated value 0.42 A 0.16 A **with 3 current paths in series at DC-3 at DC-5 - at 24 V rated value 100 A - at 110 V rated value 100 A - at 110 V rated value 100 A - at 110 V rated value 100 A - at 120 V rated value 20 V rated value 35 A - at 440 V rated value 35 A - at 440 V rated value 37 kW **at AC-3 - at 230 V rated value 22 kW - at 230 V rated value 37 kW - at 560 V rated value 37 kW - at 660 V rated value 37 kW - at 660 V rated value 37 kW - at 660 V rated value 37 kW - at 400 V rated value 37 kW - at 560 V rated value 37 kW - at 690 V rated value 38 kW - at 900 V rated value 38 kW - at 900 V rated value 39 kW - at 900 V rated value 30 V rated value 30 V rated value 40 V rated value 41 kW - at 900 V rated value 42 kW - at 900 V rated value 42 kW - at 900 V rated value 43 kW - at 900 V rated value 44 kW - at 900 V rated value 45 kW - at 900 V for current peak value n=20 rated value 40 vp to 400 V for current peak value n=20 rated value 40 vp to 400 V for current peak value n=20 rated value 40 vp to 400 V for current peak value n=20 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for current peak value n=30 rated value 40 vp to 500 V for	— at 60 V rated value	100 A
	— at 110 V rated value	100 A
and the second section of the secti	— at 220 V rated value	7 A
with 3 current paths in series at DC-3 at DC-5	— at 440 V rated value	0.42 A
		0.16 A
	 with 3 current paths in series at DC-3 at DC-5 	
- at 110 V rated value	— at 24 V rated value	100 A
at 220 V rated value	— at 60 V rated value	100 A
	— at 110 V rated value	
operating power at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value — at 690 V rated value — at 230 V rated value — at 300 V rated value — at 400 V rated value — at 500 V rated value — at 690 V for current peak value n=20 rated value — at 690 V for current peak value n=20 rated value — up to 500 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 500 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 690 V for current	— at 220 V rated value	35 A
operating power at AC-2 at 400 V rated value at AC-3 — at 230 V rated value — at 400 V rated value — at 690 V rated value — at 690 V rated value — at 1000 V rated value — at 1000 V rated value — at 230 V rated value — at 230 V rated value — at 1000 V rated value — at 400 V rated value — at 690 V rated value — at 690 V rated value — at 400 V rated value — at 690 V rated value — at 690 V rated value — at 690 V rated value — at 1000 V rated value — at 690 V rated value 9 to 200 V for current peak value n=20 rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V f	— at 440 V rated value	0.8 A
at AC-2 at 400 V rated value at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 1000 V rated value — at 1000 V rated value — at 1000 V rated value — at 230 V rated value — at 400 V rated value — at 400 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value — at 690 V rated value — at 1000 V rated value — 25 kW operating power for approx. 200000 operating cycles at AC-4 4 at 400 V rated value operating apparent power at AC-8a up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 40 F kVA 51 kVA 52 kW 53 kVA 54 kW 55 kVA 56 kVA 57 kVA 58 kVA 58 kVA 59 kVA 69 kVA 69 kVA 69 kVA 69 kVA 60 kVA 60 kVA 61 kVA 63 kVA 64 f kVA 65 kVA 66 f kVA 66 f kVA 67 kVA 68 kVA 68 kVA 69 kVA	— at 600 V rated value	0.35 A
at AC-3 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 1000 V rated value at 1000 V rated value at AC-3e at 230 V rated value at AC-3e at 230 V rated value at 400 V rated value at 500 V rated value 55 kW at 1000 V rated value 21.8 kW operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 800 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 46.5 kVA short-time withstand current in cold operating state up to 40 °C ilimited to 1 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 S switching at zero current maximum ilimited to 60 S switching at zero current maximum ilimited to 60 S switching at zero current maximum ilimited to 60 S switching at zero current maximum ilimited to 60 S switching at zero current maximum ilimited to 60 S switching at zero current maximum	operating power	
- at 230 V rated value - at 400 V rated value - at 590 V rated value - at 590 V rated value - at 590 V rated value - at 1000 V rated value - at 230 V rated value - at 1000 V rated value - at 230 V rated value - at 230 V rated value - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 590 V rated value - at 590 V rated value - at 590 V rated value - at 1000 V rated value - at 400 V rated value - at 400 V rated value - at 400 V rated value - at 690 V rated value - at 500 V rated value - at 690 V rated value - at 500 V rated value - at 690 V rated	 at AC-2 at 400 V rated value 	37 kW
- at 400 V rated value - at 690 V rated value - at 1000 V rated value - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 690 V ra	• at AC-3	
- at 500 V rated value	— at 230 V rated value	22 kW
- at 690 V rated value - at 1000 V rated value at AC-3e - at 230 V rated value - at 400 V rated value - at 400 V rated value - at 690 V rated value - at 400 V rated value - at 690 V rated value - at 400 V rated value - at 690 V	— at 400 V rated value	37 kW
- at 1000 V rated value • at AC-3e - at 230 V rated value - at 400 V rated value - at 500 V rated value - at 500 V rated value - at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up to 600 V for current peak value n=30 rated value • up t	— at 500 V rated value	45 kW
at AC-3e — at 230 V rated value — at 400 V rated value — at 690 V rated value — at 1000 V rated value — at 1000 V rated value — at 1000 V rated value — at 690 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value — at 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • 1500 A; Use minimum cross-section acc. to AC-1 rated value • limited to 10 s switching at zero current maximum • limited to 50 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum	— at 690 V rated value	55 kW
- at 230 V rated value - at 400 V rated value - at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 400 V rated value - at 400 V rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=20 rated value - at 690 V for current peak value n=30 rated value - at 690 V for current p	— at 1000 V rated value	37 kW
- at 400 V rated value - at 500 V rated value - at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 400 V rated value - at 690 V rated value - at 690 V rated value - at 690 V rated value - up to 230 V for current peak value n=20 rated value - up to 230 V for current peak value n=20 rated value - up to 500 V for current peak value n=20 rated value - up to 690 V for current peak value n=20 rated value - up to 690 V for current peak value n=20 rated value - up to 230 V for current peak value n=20 rated value - up to 230 V for current peak value n=30 rated value - up to 400 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 690 V for current peak value n=30 rated value	• at AC-3e	
- at 500 V rated value - at 690 V rated value - at 1000 V rated value - at 1000 V rated value - at 1000 V rated value operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 690 V rated value operating apparent power at AC-6a • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 50 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum	— at 230 V rated value	
- at 690 V rated value - at 1000 V rated value 37 kW operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum	— at 400 V rated value	
operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 400 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 500 V for surrent peak value n=30 rated value • up to 500 V for surrent peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum		
operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 690 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum		
at 400 V rated value at 690 V rated value 21.8 kW operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current in cold operating state up to 40 °C ilmited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum		37 kW
 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 230 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 46.7 kVA up to 690 V for current peak value n=30 rated value 46.5 kVA Short-time withstand current in cold operating state up to 400 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		
at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 230 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value ilmited to 1 s switching at zero current maximum ilmited to 10 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum		17 9 kW
operating apparent power at AC-6a oup to 230 V for current peak value n=20 rated value oup to 400 V for current peak value n=20 rated value oup to 500 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value oup to 690 V for current peak value n=20 rated value oup to 230 V for current peak value n=30 rated value oup to 400 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value oup to 500 V for current peak value n=30 rated value oup to 690 V for current peak value n=30 rated value oup to 6		
 up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		21.6 (1)
• up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching frequency		31 kVA
up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value inited to 1 s switching at zero current maximum ilmited to 5 s switching at zero current maximum ilmited to 10 s switching at zero current maximum ilmited to 10 s switching at zero current maximum ilmited to 30 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum ilmited to 60 s switching at zero current maximum	·	
up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C Ilmited to 1 s switching at zero current maximum Ilmited to 5 s switching at zero current maximum Ilmited to 10 s switching at zero current maximum Ilmited to 30 s switching at zero current maximum Ilmited to 30 s switching at zero current maximum Ilmited to 60 s switching at zero current maximum Ilmi		
operating apparent power at AC-6a • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching frequency		
 up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		
 up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		21.5 kVA
 up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		
• up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum		
short-time withstand current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum 1 500 A; Use minimum cross-section acc. to AC-1 rated value 538 A; Use minimum cross-section acc. to AC-1 rated value 423 A; Use minimum cross-section acc. to AC-1 rated value		
40 °C ■ limited to 1 s switching at zero current maximum ■ limited to 5 s switching at zero current maximum ■ limited to 10 s switching at zero current maximum ■ limited to 30 s switching at zero current maximum ■ limited to 30 s switching at zero current maximum ■ limited to 60 s switchin		
 limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 		
 limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 423 A; Use minimum cross-section acc. to AC-1 rated value no-load switching frequency 	 limited to 1 s switching at zero current maximum 	1 500 A; Use minimum cross-section acc. to AC-1 rated value
 ◆ limited to 30 s switching at zero current maximum ◆ limited to 60 s switching at zero current maximum No-load switching frequency 538 A; Use minimum cross-section acc. to AC-1 rated value 423 A; Use minimum cross-section acc. to AC-1 rated value 	 limited to 5 s switching at zero current maximum 	1 186 A; Use minimum cross-section acc. to AC-1 rated value
• limited to 60 s switching at zero current maximum 10	 limited to 10 s switching at zero current maximum 	851 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	 limited to 30 s switching at zero current maximum 	538 A; Use minimum cross-section acc. to AC-1 rated value
	limited to 60 s switching at zero current maximum	423 A; Use minimum cross-section acc. to AC-1 rated value
a at AC	no-load switching frequency	
♥ at AO	• at AC	5 000 1/h
operating frequency	operating frequency	
• at AC-1 maximum 900 1/h	• at AC-1 maximum	900 1/h

e at AC 2 maximum	400 1/b
at AC-2 maximumat AC-3 maximum	400 1/h 1 000 1/h
at AC-3e maximum at AC-3e maximum	1 000 1/h
at AC-3e maximum at AC-4 maximum	300 1/h
• at AC-4 maximum Control circuit/ Control	300 1/11
	AC
type of voltage of the control supply voltage	AC
control supply voltage at AC	400 \
at 50 Hz rated value	400 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	296 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.61
apparent holding power of magnet coil at AC	
• at 50 Hz	19 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.38
closing delay	
• at AC	13 50 ms
opening delay	
• at AC	10 21 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
 at 230 V rated value 	6 A
 at 400 V rated value 	3 A
 at 500 V rated value 	2 A
 at 690 V rated value 	1 A
operational current at DC-12	
at 24 V rated value	10 A
at 48 V rated value	6 A
● at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
• at 600 V rated value	0.15 A
operational current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
at 60 V rated value	2 A
• at 110 V rated value	1A
at 175 V rated value at 125 V rated value	0.9 A
at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	77 A
at 480 V rated value at 600 V rated value	62 A
	VL N
yielded mechanical performance [hp]	
• for single-phase AC motor	7.5 ha
— at 110/120 V rated value	7.5 hp
— at 230 V rated value	15 hp

• for 3-phase AC motor	251		
— at 200/208 V rated value	25 hp		
— at 220/230 V rated value	30 hp		
— at 460/480 V rated value	60 hp		
— at 575/600 V rated value	60 hp		
contact rating of auxiliary contacts according to UL	A600 / P600		
Short-circuit protection			
design of the fuse link			
for short-circuit protection of the main circuit	-O. 050 A (000 V 400 I.A) -M. 400 A (000 V 400 I.A) B000, 000 A (445 V 00		
— with type of coordination 1 required	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)		
— with type of assignment 2 required	gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)		
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)		
nstallation/ mounting/ dimensions			
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface		
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715		
side-by-side mounting	Yes		
height	140 mm		
width	70 mm		
depth	152 mm		
required spacing			
 with side-by-side mounting 			
— forwards	20 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	0 mm		
 for grounded parts 			
— forwards	20 mm		
— upwards	10 mm		
— at the side	10 mm		
— downwards	10 mm		
for live parts			
— forwards	20 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	10 mm		
Connections/ Terminals			
type of electrical connection			
for main current circuit	screw-type terminals		
 for auxiliary and control circuit 	spring-loaded terminals		
 at contactor for auxiliary contacts 	Spring-type terminals		
of magnet coil	Spring-type terminals		
type of connectable conductor cross-sections for main contacts			
finely stranded with core end processing	2x (2.5 35 mm²), 1x (2.5 50 mm²)		
connectable conductor cross-section for main contacts			
• solid	2.5 16 mm²		
• stranded	6 70 mm²		
finely stranded with core end processing	2.5 50 mm²		
connectable conductor cross-section for auxiliary contacts			
solid or stranded	0.5 2.5 mm²		
 finely stranded with core end processing 	0.5 2.5 mm²		
finely stranded without core end processing	0.5 2.5 mm²		
type of connectable conductor cross-sections			
• for auxiliary contacts			
— solid or stranded	2x (0.5 2.5 mm²)		
— finely stranded with core end processing	2x (0.5 1.5 mm²)		
— finely stranded without core end processing	2x (0.5 2.5 mm²)		
for AWG cables for auxiliary contacts	2x (20 16)		
AWG number as coded connectable conductor cross			
section			

 for main contacts 	10 2	
 for auxiliary contacts 	20 14	
Safety related data		
product function		
 mirror contact according to IEC 60947-4-1 	Yes	
 positively driven operation according to IEC 60947-5-1 	No	
suitability for use safety-related switching OFF	Yes	
B10 value with high demand rate according to SN 31920	1 000 000	
proportion of dangerous failures		
 with low demand rate according to SN 31920 	40 %	
 with high demand rate according to SN 31920 	73 %	
failure rate [FIT] with low demand rate according to SN 31920	100 FIT	
T1 value for proof test interval or service life according to IEC 61508	20 a	
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
Certificates/ approvals		

Certificates/ approvals

General Product Approval



Confirmation





<u>KC</u>





Type Examination Certificate





<u>firmations</u>

Type Test Certificates/Test Report

Special Test Certificate

Marine / Shipping















other	Railway	Dangerous Good	Environment
Confirmation	V" " 101 1	Transport Information	5 : 110

Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2045-3AV00

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2045-3AV00


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-3AV00


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2045-3AV00\&lang=en}}$

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2045-3AV00&objecttype=14&gridview=view1





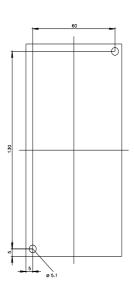

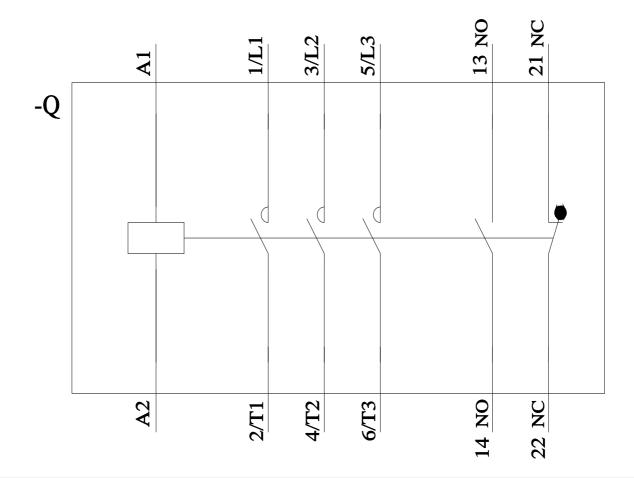

last modified: 8/15/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20453AV00