SIEMENS

Data sheet 3RT2046-1AL24



power contactor, AC-3e/AC-3, 95 A, 45 kW / 400 V, 3-pole, 230 V AC, 50/60 Hz, auxiliary contacts: 2 NO + 2 NC, screw terminal, size: S3, removable auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S3
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	19.8 W
 at AC in hot operating state per pole 	6.6 W
 without load current share typical 	25 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	1 000 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	8 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	10.3g / 5 ms, 6,.g / 10 ms
shock resistance with sine pulse	
• at AC	16.3g / 5 ms, 10.g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	1 000 V
 at AC-3e rated value maximum 	1 000 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated	130 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated	130 A
value	
 up to 690 V at ambient temperature 60 °C rated value 	110 A
• at AC-3	
— at 400 V rated value	95 A
— at 500 V rated value	95 A
— at 690 V rated value	78 A
— at 1000 V rated value	30 A
• at AC-3e	05.4
— at 400 V rated value	95 A
— at 500 V rated value	95 A
— at 690 V rated value	78 A
— at 1000 V rated value	30 A
 at AC-4 at 400 V rated value 	80 A
 at AC-5a up to 690 V rated value 	114 A
 at AC-5b up to 400 V rated value 	95 A
• at AC-6a	
 up to 230 V for current peak value n=20 rated value 	84.4 A
 up to 400 V for current peak value n=20 rated value 	84.4 A
 up to 500 V for current peak value n=20 rated value 	84.4 A
 up to 690 V for current peak value n=20 rated value 	58 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	56.3 A
— up to 400 V for current peak value n=30 rated value	56.3 A
— up to 500 V for current peak value n=30 rated value	56.3 A
— up to 690 V for current peak value n=30 rated value	56.3 A
minimum cross-section in main circuit at maximum AC-1 rated	50 mm²
value	
operational current for approx. 200000 operating cycles at AC-4	
	40 A
at 400 V rated value	42 A
at 690 V rated value	30 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	60 A
— at 110 V rated value	9 A
— at 220 V rated value	2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.4 A
with 2 current paths in series at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	10 A
— at 440 V rated value	1.8 A
— at 600 V rated value	1 A
 with 3 current paths in series at DC-1 	
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
	100 A 80 A

— at 600 V rated value	2.6 A			
at 1 current path at DC-3 at DC-5				
— at 24 V rated value	40 A			
— at 60 V rated value	6 A			
— at 110 V rated value	2.5 A			
— at 220 V rated value	1 A			
— at 440 V rated value	0.15 A			
— at 600 V rated value	0.06 A			
with 2 current paths in series at DC-3 at DC-5				
— at 24 V rated value	100 A			
— at 60 V rated value	100 A			
— at 110 V rated value	100 A			
— at 220 V rated value	7 A			
— at 440 V rated value	0.42 A			
— at 600 V rated value	0.16 A			
with 3 current paths in series at DC-3 at DC-5				
— at 24 V rated value	100 A			
— at 60 V rated value	100 A			
— at 110 V rated value	100 A			
— at 220 V rated value	35 A			
— at 440 V rated value	0.8 A			
— at 600 V rated value	0.35 A			
operating power				
at AC-2 at 400 V rated value	45 kW			
• at AC-3				
— at 230 V rated value	22 kW			
— at 400 V rated value	45 kW			
— at 500 V rated value	55 kW			
— at 690 V rated value	75 kW			
— at 1000 V rated value	37 kW			
• at AC-3e				
— at 230 V rated value	22 kW			
— at 400 V rated value	45 kW			
— at 500 V rated value	55 kW			
— at 690 V rated value	75 kW			
— at 1000 V rated value	37 kW			
operating power for approx. 200000 operating cycles at AC-				
at 400 V rated value	22 kW			
at 690 V rated value	27.4 kW			
operating apparent power at AC-6a				
up to 230 V for current peak value n=20 rated value	33 kVA			
up to 400 V for current peak value n=20 rated value	58 kVA			
up to 500 V for current peak value n=20 rated value	73 kVA			
up to 690 V for current peak value n=20 rated value	69 kVA			
operating apparent power at AC-6a				
up to 230 V for current peak value n=30 rated value	22.4 kVA			
• up to 400 V for current peak value n=30 rated value	39 kVA			
• up to 500 V for current peak value n=30 rated value	48.7 kVA			
• up to 690 V for current peak value n=30 rated value	67.3 kVA			
short-time withstand current in cold operating state up to				
40 °C				
limited to 1 s switching at zero current maximum	1 725 A; Use minimum cross-section acc. to AC-1 rated value			
limited to 5 s switching at zero current maximum	1 297 A; Use minimum cross-section acc. to AC-1 rated value			
limited to 10 s switching at zero current maximum	946 A; Use minimum cross-section acc. to AC-1 rated value			
limited to 30 s switching at zero current maximum	610 A; Use minimum cross-section acc. to AC-1 rated value			
limited to 60 s switching at zero current maximum	486 A; Use minimum cross-section acc. to AC-1 rated value			
no-load switching frequency				
• at AC	5 000 1/h			
at AC operating frequency at AC-1 maximum				

	070.10
• at AC-2 maximum	350 1/h
• at AC-3 maximum	850 1/h
at AC-3e maximum	850 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	230 V
at 60 Hz rated value	230 V
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	348 VA
• at 60 Hz	296 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.62
● at 60 Hz	0.55
apparent holding power of magnet coil at AC	
● at 50 Hz	25 VA
● at 60 Hz	18 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.35
● at 60 Hz	0.41
closing delay	
• at AC	13 50 ms
opening delay	
• at AC	10 21 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	2
number of NC contacts for auxiliary contacts instantaneous	2 2
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous	
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact	2
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum	2
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	2 10 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value	2 10 A 6 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value	2 10 A 6 A 3 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value	2 10 A 6 A 3 A 2 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value	2 10 A 6 A 3 A 2 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12	2 10 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value	2 10 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value	2 10 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 110 V rated value • at 125 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 24 V rated value • at 250 V rated value • at 270 V rated value • at 28 V rated value • at 29 V rated value • at 24 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 120 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 600 V rated value • at 600 V rated value • at 48 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 110 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 148 V rated value • at 125 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 29 V rated value • at 30 V rated value • at 48 V rated value • at 60 V rated value • at 600 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7

• at 480 V rated value	96 A		
at 600 V rated value	77 A		
yielded mechanical performance [hp]			
 for single-phase AC motor 			
— at 110/120 V rated value	10 hp		
— at 230 V rated value	20 hp		
• for 3-phase AC motor			
 at 200/208 V rated value 	30 hp		
 at 220/230 V rated value 	30 hp		
— at 460/480 V rated value	75 hp		
— at 575/600 V rated value	75 np 75 hp		
contact rating of auxiliary contacts according to UL	75 np A600 / P600		
Short-circuit protection	7,000 77 000		
design of the fuse link			
for short-circuit protection of the main circuit	~C. 250 A (C00 V 400 kA) ~M. 460 A (C00 V 400 kA) BC00, 200 A (445 V 00		
— with type of coordination 1 required	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)		
— with type of assignment 2 required	gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)		
• for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)		
Installation/ mounting/ dimensions			
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface		
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715		
side-by-side mounting	Yes		
height	140 mm		
width	70 mm		
depth	195 mm		
required spacing			
with side-by-side mounting			
— forwards	20 mm		
	10 mm		
— upwards	10 mm		
— downwards			
— at the side	0 mm		
for grounded parts			
— forwards	20 mm		
— upwards	10 mm		
— at the side	10 mm		
— downwards	10 mm		
• for live parts			
— forwards	20 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	10 mm		
Connections/ Terminals			
type of electrical connection			
for main current circuit	screw-type terminals		
for auxiliary and control circuit	screw-type terminals		
at contactor for auxiliary contacts	Screw-type terminals		
of magnet coil	Screw-type terminals		
type of connectable conductor cross-sections for main contacts	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		
finely stranded with core end processing	2x (2.5 35 mm²), 1x (2.5 50 mm²)		
connectable conductor cross-section for main contacts			
	2.5 16 mm ²		
• solid	2.5 16 mm²		
• stranded	6 70 mm ²		
• finely stranded with core end processing	2.5 50 mm²		
connectable conductor cross-section for auxiliary contacts	0.505		
solid or stranded	0.5 2.5 mm ²		
finely stranded with core end processing	0.5 2.5 mm²		
type of connectable conductor cross-sections			
for auxiliary contacts			

— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)		
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)		
 for AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14)		
AWG number as coded connectable conductor cross section			
• for main contacts	10 2		
 for auxiliary contacts 	20 14		
Safety related data			
product function			
 mirror contact according to IEC 60947-4-1 	Yes		
 positively driven operation according to IEC 60947-5-1 	No		
suitability for use safety-related switching OFF	Yes		
B10 value with high demand rate according to SN 31920	1 000 000		
proportion of dangerous failures			
 with low demand rate according to SN 31920 	40 %		
 with high demand rate according to SN 31920 	73 %		
failure rate [FIT] with low demand rate according to SN 31920	100 FIT		
T1 value for proof test interval or service life according to IEC 61508	20 a		
protection class IP on the front according to IEC 60529	IP20		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front		

Certificates/ approvals

General Product Approval



Confirmation





<u>KC</u>



EMC	Functional Safety/Safety of Ma- chinery	Declaration of Conformity	Test Certificates	Marine / Shipping
-----	---	---------------------------	-------------------	-------------------



Type Examination Certificate





Special Test Certificate



Marine / Shipping other











Confirmation

Railway Dangerous Good Environment

<u>Vibration and Shock</u> <u>Transport Information</u> <u>Environmental Confirmations</u>

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

 $Information-\ and\ Download center\ (Catalogs,\ Brochures,...)$

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2046-1AL24

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2046-1AL24

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2046-1AL24


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2046-1AL24&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2046-1AL24/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2046-1AL24&objecttype=14&gridview=view1







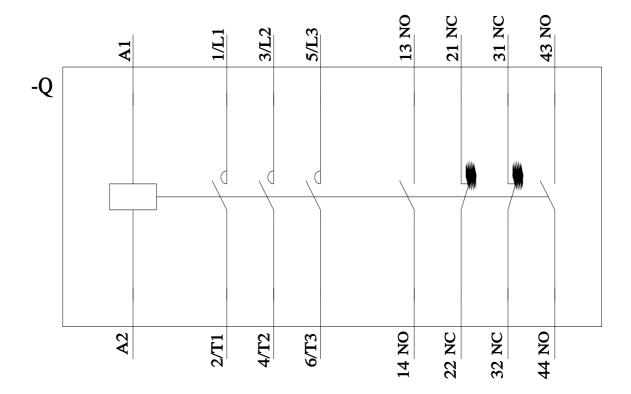

last modified: 8/15/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20461AL24