# SIEMENS

#### Data sheet

### 3RT2325-2AL20



contactor AC-1, 35 A, 400 V / 40 °C, 4-pole, 230 V AC, 50/60 Hz, auxiliary contacts: 1 NO + 1 NC, spring-loaded terminal, size: S0

product brand name	SIRIUS
product designation	Contactor
product type designation	3RT23
General technical data	
size of contactor	SO
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	7.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	1.9 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of the auxiliary and control circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV
shock resistance at rectangular impulse	
• at AC	7,5g / 5 ms, 4,7g / 10 ms
shock resistance with sine pulse	
• at AC	11,8g / 5 ms, 7,4g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	4
number of NO contacts for main contacts	4
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated value	35 A

• at AC-1	25.4
<ul> <li>— up to 690 V at ambient temperature 40 °C rated value</li> </ul>	35 A
— up to 690 V at ambient temperature 60 °C rated	30 A
value	
• at AC-3	
— at 400 V rated value	15.5 A
<ul> <li>at AC-4 at 400 V rated value</li> </ul>	15.5 A
minimum cross-section in main circuit at maximum AC-1 rated	10 mm <sup>2</sup>
value	
operating power	
• at AC-3 at 400 V rated value	7.5 kW
at AC-4 at 400 V rated value	7.5 kW
short-time withstand current in cold operating state up to 40 °C	
<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	Use minimum cross-section acc. to AC-1 rated value
• limited to 60 s switching at zero current maximum	Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	5 000 1/h
operating frequency at AC-1 maximum	1 000 1/h
Control circuit/ Control	
type of voltage	AC
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	230 V
• at 60 Hz rated value	230 V
operating range factor control supply voltage rated value of	
magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	81 VA
• at 60 Hz	79 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.72
• at 60 Hz	0.74
apparent holding power of magnet coil at AC	
• at 50 Hz	10.5 VA
• at 60 Hz	8.5 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.25
• at 60 Hz	0.28
closing delay	
• at AC	8 40 ms
opening delay	4 40
• at AC	4 16 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NO contracts for smillions of the	4
number of NC contacts for auxiliary contacts	1
attachable	2
attachable     instantaneous contact	2 1
attachable     instantaneous contact number of NO contacts for auxiliary contacts	2 1 1
attachable     instantaneous contact  number of NO contacts for auxiliary contacts     attachable	2 1 1 2
attachable     instantaneous contact  number of NO contacts for auxiliary contacts     attachable     instantaneous contact	2 1 1 2 1
attachable     instantaneous contact  number of NO contacts for auxiliary contacts     attachable     instantaneous contact  operational current at AC-12 maximum	2 1 1 2
attachable     instantaneous contact  number of NO contacts for auxiliary contacts     attachable     instantaneous contact  operational current at AC-12 maximum  operational current at AC-15	2 1 1 2 1 10 A
attachable     instantaneous contact  number of NO contacts for auxiliary contacts     attachable     instantaneous contact  operational current at AC-12 maximum	2 1 1 2 1

• at 500 V rated value	2 A			
• at 690 V rated value	1 A			
operational current at DC-12				
<ul> <li>at 24 V rated value</li> </ul>	10 A			
• at 48 V rated value	6 A			
• at 60 V rated value	6 A			
<ul> <li>at 110 V rated value</li> </ul>	3 A			
• at 125 V rated value	2 A			
at 220 V rated value	1 A			
• at 600 V rated value	0.15 A			
operational current at DC-13				
• at 24 V rated value	10 A			
• at 48 V rated value	2 A			
• at 110 V rated value	1A			
• at 125 V rated value	0.9 A			
• at 220 V rated value	0.3 A			
• at 600 V rated value	0.1 A			
design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required	gG: 10 A (230 V, 400 A)			
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)			
UL/CSA ratings				
contact rating of auxiliary contacts according to UL	A600 / Q600			
Short-circuit protection				
product function short circuit protection	No			
design of the fuse link				
for short-circuit protection of the main circuit				
- with type of coordination 1 required	gG: 63 A (690 V, 100 kA)			
- with type of assignment 2 required	gG: 20 A (690 V, 100 kA)			
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 10 A (690 V, 1 kA)			
Installation/ mounting/ dimensions				
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and			
	backward by +/- $22.5^{\circ}$ on vertical mounting surface			
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715			
<ul> <li>side-by-side mounting</li> </ul>	Yes			
height	102 mm			
width	60 mm			
depth	97 mm			
required spacing				
<ul> <li>with side-by-side mounting</li> </ul>				
— forwards	10 mm			
— upwards				
	10 mm			
— downwards	10 mm 10 mm			
— downwards — at the side				
	10 mm			
— at the side	10 mm			
<ul><li>— at the side</li><li> for grounded parts</li></ul>	10 mm 0 mm			
<ul> <li>— at the side</li> <li>for grounded parts</li> <li>— forwards</li> </ul>	10 mm 0 mm 10 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> </ul>	10 mm 0 mm 10 mm 10 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>upwards</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>upwards</li> <li>upwards</li> <li>downwards</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 10 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>upwards</li> <li>upwards</li> <li>at the side</li> <li>at the side</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>upwards</li> <li>upwards</li> <li>at the side</li> <li>at the side</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 10 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>upwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>group at the side</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 6 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>for live parts</li> <li>forwards</li> <li>upwards</li> <li>upwards</li> <li>at the side</li> </ul> Connections/ Terminals type of electrical connection <ul> <li>for main current circuit</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>upwards</li> <li>upwards</li> <li>at the side</li> </ul> Connections/ Terminals type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm 8 spring-loaded terminals spring-loaded terminals			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> Connections/ Terminals type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm 10 mm 5 pring-loaded terminals spring-loaded terminals spring-type terminals			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>for wards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> Connections/ Terminals type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm 8 spring-loaded terminals spring-loaded terminals			
<ul> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> Connections/ Terminals type of electrical connection <ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> </ul>	10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm 10 mm 5 pring-loaded terminals spring-loaded terminals spring-type terminals			

<ul> <li>solid or stranded</li> </ul>			2x (1 10 mm²)				
<ul> <li>finely stranded with core end processing</li> </ul>			2x (1 6 mm <sup>2</sup> )				
<ul> <li>finely stranded without core end processing</li> </ul>			2x (1 6 mm <sup>2</sup> )				
connectable conducto	r cross-section for ma	in contacts					
• solid		1 10 mm²					
<ul> <li>solid or stranded</li> </ul>	solid or stranded		1 10 mm <sup>2</sup>				
<ul> <li>stranded</li> </ul>	stranded		1 10 mm <sup>2</sup>				
<ul> <li>finely stranded w</li> </ul>	<ul> <li>finely stranded with core end processing</li> </ul>			1 6 mm <sup>2</sup>			
<ul> <li>finely stranded w</li> </ul>	<ul> <li>finely stranded without core end processing</li> </ul>			1 6 mm <sup>2</sup>			
connectable conductor cross-section for auxiliary contacts							
solid or stranded			0.5 2.5 mm <sup>2</sup>				
<ul> <li>finely stranded with core end processing</li> </ul>			0.5 1.5 mm²				
<ul> <li>finely stranded w</li> </ul>	<ul> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul>			0.5 2.5 mm <sup>2</sup>			
type of connectable c	onductor cross-section	IS					
<ul> <li>for auxiliary containing</li> </ul>							
— solid				2x (0.5 2.5 mm²)			
— solid or stra	nded		2x (0.5 2.5 mm <sup>2</sup> )				
- finely strand	led with core end proces	sing	2x (0.5 1.5 mm²)				
	led without core end pro		2x (0.5 2.5 mm²)				
	or auxiliary contacts	5	2x (20 14)				
	d connectable conduct	or cross	24 (20 14)				
<ul> <li>for main contacts</li> </ul>			18 8				
<ul> <li>for auxiliary conta</li> </ul>			20 14				
Safety related data							
product function							
•	cording to IEC 60947-4-	1	Yes				
	mirror contact according to IEC 60947-4-1 T1 value for proof test interval or service life according to IEC		20 a				
61508	61508						
protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529			IP20 finger-safe, for vertical contact from the front				
	-	C 60529	linger-sale, for vertical conta	act from the front			
	Communication/ Protocol						
-	product function bus communication						
Certificates/ approvals							
General Product App	oval				EMC		
(SP)	<u>Confirmation</u>			EHC	RCM		
Functional Safety/Safety of Ma- chinery	Declaration of Confo	ormity	Test Certificates		Marine / Shipping		
<u>Type Examination Cer-</u> <u>tificate</u>	CE EG-Konf.	UK CA	<u>Special Test Certific</u> <u>ate</u>	<u>Type Test Certific-</u> ates/Test Report	ABS		
Marine / Shipping							
BUREAU VERITAS		Lloyd's Register us	PRS	RINA	RMRS		
other		Railway	Environment				



Vibration and Shock

Environmental Confirmations

#### Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2325-2AL20

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2325-2AL20

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2325-2AL20

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2325-2AL20&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2325-2AL20/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2325-2AL20&objecttype=14&gridview=view1

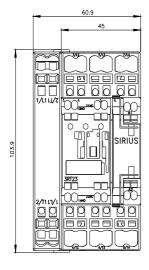

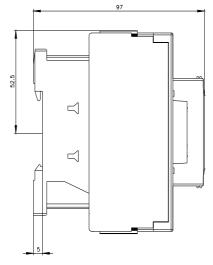

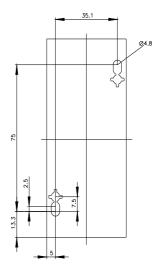

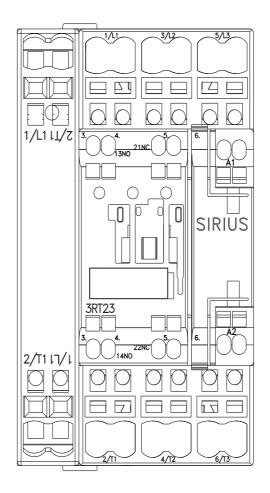

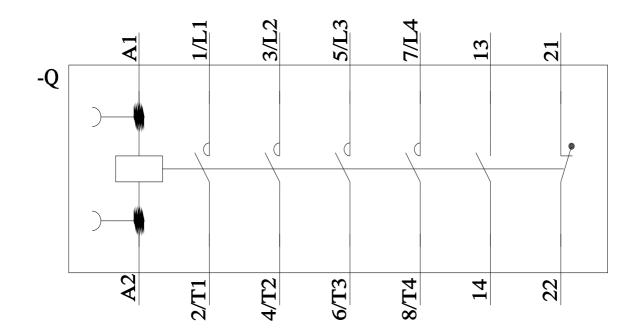

last modified:

11/21/2022 🖸

8/18/2023

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RT23252AL20