SIEMENS

Data sheet

3RT2625-1BF45



capacitor contactor, AC-6b 16.7 kVAr, / 400 V, 3-pole, 110 V DC, auxiliary contacts: 1 NO + 2 NC, screw terminal, size: S0

product brand name	SIRIUS
product designation	capacitor contactors
product type designation	3RT26
General technical data	
size of contactor	SO
product extension auxiliary switch	No
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at DC	10g / 5 ms, 7,5g / 10 ms
shock resistance with sine pulse	
• at DC	15g / 5 ms, 10g / 10 ms
mechanical service life (operating cycles)	
 of the contactor with added auxiliary switch block typical 	3 000 000
electrical endurance (operating cycles)	200 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operational current at AC-6b at 690 V at ambient temperature 60 °C rated value	24 A
operating reactive power at AC-6b	
 at 230 V at 50/60 Hz at ambient temperature 60 °C rated value 	3 9.6 kvar
 at 400 V at 50/60 Hz at ambient temperature 60 °C rated value 	6 16.7 kvar

 at 500 V at 50/60 Hz at ambient temperature 60 °C rated value 	7 21 kvar
• at 690 V at 50/60 Hz at ambient temperature 60 °C rated	10 29 kvar
value	10 20 KVdi
no-load switching frequency	
• at DC	500 1/h
operating frequency at AC-6b	
• at 230 V maximum	180 1/h
• at 240 V maximum	180 1/h
• at 400 V maximum	180 1/h
• at 480 V maximum	180 1/h
• at 500 V maximum	180 1/h
• at 600 V maximum	180 1/h
• at 690 V maximum	150 1/h
Control circuit/ Control	
type of voltage	DC
type of voltage of the control supply voltage	DC
control supply voltage at DC	
rated value	110 V
operating range factor control supply voltage rated value of	
magnet coil at DC	
 initial value 	0.8
• full-scale value	1.1
closing power of magnet coil at DC	5.9 W
holding power of magnet coil at DC	5.9 W
closing delay	
• at DC	50 170 ms
opening delay	
• at DC	15 18 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts	2
attachable	0
 instantaneous contact 	2
number of NO contacts for auxiliary contacts	1
attachable	0
 instantaneous contact 	1
operational current of auxiliary contacts at AC-12 maximum	10 A
operational current of auxiliary contacts at AC-15	
operational current of auxiliary contacts at AC-15 • at 230 V	6 A
	6 A 3 A
• at 230 V	
• at 230 V • at 400 V	3 A
• at 230 V • at 400 V • at 690 V	3 A
at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13	3 A 1 A
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V 	3 A 1 A 6 A
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V 	3 A 1 A 6 A 2 A
 at 230 V at 400 V at 690 V Operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V 	3 A 1 A 6 A 2 A 1 A
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V 	3 A 1 A 6 A 2 A 1 A 0.9 A
 at 230 V at 400 V at 690 V Operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V Contact reliability of auxiliary contacts	3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings	3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL	3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection	3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL	3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of 	3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001 A600 / Q600
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required for short-circuit protection of the auxiliary switch required 	3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001 A600 / Q600 gG: 50 A (690 V, 50 kA)
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V Contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required 	3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001 A600 / Q600 gG: 50 A (690 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001 A600 / Q600 gG: 50 A (690 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact reliability of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions 	3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001 A600 / Q600 gG: 50 A (690 V, 50 kA) gG: 10 A (500 V, 1 kA) +/-180° rotation possible on vertical mounting surface; can be tilted forward and

width		45 mm			
depth		165 mm			
required spacing					
 with side-by-side mounting at the side 		10 mm			
 for grounded parts at the side 		10 mm			
Connections/ Terminals					
type of electrical connection					
 for main current circuit 		screw-type terminals			
 for auxiliary and control circuit 		screw-type terminals			
 at contactor for auxiliary contacts 		Screw-type terminals			
 of magnet coil 		Screw-type terminals			
type of connectable conductor cross-sections for	or main contacts				
• solid		2x (1 2.5 mm²), 2x (2.5 1	10 mm²)		
• stranded		2x (1 2.5 mm ²), 2x (2.5 10 mm ²)			
 solid or stranded 	solid or stranded		2x (1 2.5 mm²), 2x (2.5 10 mm²)		
 finely stranded with core end processing 		2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ²			
type of connectable conductor cross-sectio	ns				
 for auxiliary contacts 					
— solid		2x (0.5 1.5 mm²), 2x (0.75 .	2.5 mm²), 2x 4 mm²		
— solid or stranded			2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²		
— finely stranded with core end proce	ssing	2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)			
 for AWG cables for auxiliary contacts 	5	2x (20 16), 2x (18 14), 2x 12			
type of minimum connectable cross-section contacts at AC-6b	is for main				
• at 40 °C		1x 6 mm ²			
● at 60 °C		1x 10 mm², 2x 6 mm²			
AWG number as coded connectable conductor main contacts	cross section for	16 8			
Safety related data					
product function					
mirror contact according to IEC 60947-4-1		No			
 positively driven operation according to IEC 60947-5-1 		No			
protection class IP on the front according to		IP20			
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front			
Certificates/ approvals					
General Product Approval				EMC	
Ceneral Freduct Approval				Lino	
	<u>Confirmatio</u>		EHC	RCM	
Declaration of Conformity	Test Certificate	es Marine / Shipping			
CE UK EG-Konf. CA	<u>Type Test Cer</u> ates/Test Rep		Lloyd's Register uts	RINA	
other	Dangerous Go	od			
Confirmation	Transport Inform	nation			
urther information Siemens has decided to exit the Russian ma					

Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business


Siemens is working on the renewal of the current EAC certificates.


Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).


Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2625-1BF45 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2625-1BF45 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RT2625-1BF45 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2625-1BF45&lang=en Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RT2625-1BF45/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2625-1BF45&objecttype=14&gridview=view1







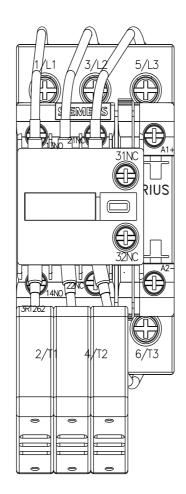

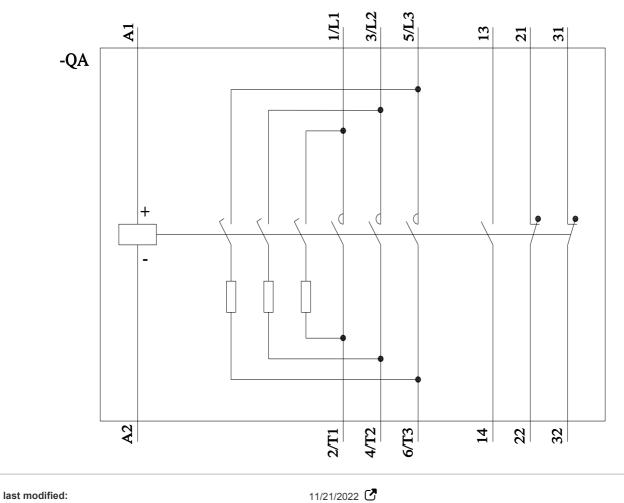

Subject to change without notice © Copyright Siemens

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RT26251BF45