SIEMENS

Data sheet 3RT2626-1BB45



capacitor contactor, AC-6b 20 kVAr, / 400 V, 3-pole, 24 V DC, auxiliary contacts: 1 NO + 2 NC, screw terminal, size: S0 $\,$

product brand name	SIRIUS
product designation	capacitor contactors
product type designation	3RT26
General technical data	
size of contactor	S0
product extension auxiliary switch	No
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at DC	10g / 5 ms, 7,5g / 10 ms
shock resistance with sine pulse	
• at DC	15g / 5 ms, 10g / 10 ms
mechanical service life (operating cycles)	
of the contactor with added auxiliary switch block typical	3 000 000
electrical endurance (operating cycles)	200 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operational current at AC-6b at 690 V at ambient temperature 60 °C rated value	29 A
operating reactive power at AC-6b	
 at 230 V at 50/60 Hz at ambient temperature 60 °C rated value 	4 11.5 kvar
 at 400 V at 50/60 Hz at ambient temperature 60 °C rated value 	7 20 kvar

 at 500 V at 50/60 Hz at ambient temperature 60 °C rated value 	8 25 kvar
 at 690 V at 50/60 Hz at ambient temperature 60 °C rated value 	11 34 kvar
no-load switching frequency	
• at DC	500 1/h
operating frequency at AC-6b	
• at 230 V maximum	100 1/h
• at 240 V maximum	100 1/h
• at 400 V maximum	100 1/h
at 480 V maximum	100 1/h
● at 500 V maximum	100 1/h
• at 600 V maximum	100 1/h
• at 690 V maximum	100 1/h
Control circuit/ Control	
type of voltage	DC
type of voltage type of voltage of the control supply voltage	DC
control supply voltage at DC	
• rated value	24 V
operating range factor control supply voltage rated value of magnet coil at DC	24 V
• initial value	0.8
• full-scale value	1.1
closing power of magnet coil at DC	5.9 W
holding power of magnet coil at DC	5.9 W
closing delay	0.0 11
• at DC	50 170 ms
opening delay	30 170 ms
• at DC	15 18 ms
	10 10 ms
arcing time control version of the switch operating mechanism	Standard A1 - A2
residual current of the electronics for control with signal	Standard A1 - A2
<0>	
at DO at O4 V as a sign of a sign of a library	
at DC at 24 V maximum permissible	16 mA
Auxiliary circuit	
Auxiliary circuit number of NC contacts for auxiliary contacts	2
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable	2 0
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact	2 0 2
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts	2 0 2 1
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable	2 0 2 1 0
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact	2 0 2 1 0
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum	2 0 2 1 0
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15	2 0 2 1 0 1 10 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V	2 0 2 1 0 1 10 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V	2 0 2 1 0 1 10 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V	2 0 2 1 0 1 10 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13	2 0 2 1 0 1 10 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V	2 0 2 1 0 1 10 A 6 A 3 A 1 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V	2 0 2 1 0 1 10 A 6 A 3 A 1 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V	2 0 2 1 0 1 10 A 6 A 3 A 1 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of	2 0 2 1 0 1 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001
Auxiliary circuit number of NC contacts for auxiliary contacts attachable instantaneous contact number of NO contacts for auxiliary contacts attachable instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V at 110 V at 125 V at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required	2 0 2 1 10 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001 GG: 63 A (690 V, 50 kA)
number of NC contacts for auxiliary contacts	2 0 2 1 10 10 A 6 A 3 A 1 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001

	backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022
height	135 mm
width	45 mm
depth	165 mm
required spacing	
 with side-by-side mounting at the side 	10 mm
 for grounded parts at the side 	10 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control circuit 	screw-type terminals
 at contactor for auxiliary contacts 	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	
• solid	2x (1 2.5 mm²), 2x (2.5 10 mm²)
• stranded	2x (1 2.5 mm²), 2x (2.5 10 mm²)
solid or stranded	2x (1 2.5 mm²), 2x (2.5 10 mm²)
 finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14), 2x 12
type of minimum connectable cross-sections for main contacts at AC-6b	
• at 40 °C	1x 10 mm²
● at 60 °C	2x 10 mm²
AWG number as coded connectable conductor cross section for main contacts	16 8
afety related data	
product function	
 mirror contact according to IEC 60947-4-1 	No
 positively driven operation according to IEC 60947-5-1 	No
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

General Product Approval





Confirmation









Declaration of Conformity

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report







other

Dangerous Good

Confirmation



Transport Information

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2626-1BB45

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2626-1BB45

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2626-1BB4


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT26


Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2626-1BB45&objecttype=14&gridview=view1







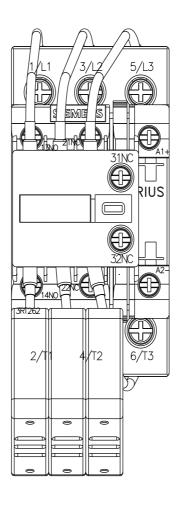

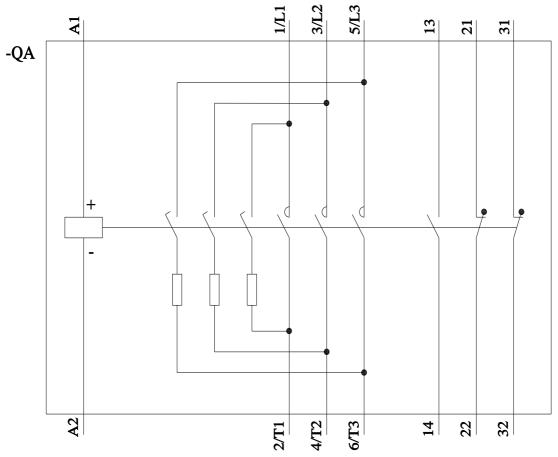

last modified: 11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT26261BB45