SIEMENS

Data sheet

3RT2636-1NB35




capacitor contactor, AC-6b 50 kVAr, / 400 V, 3-pole, 20-33 V AC/DC, 50/60 Hz, with integrated varistor, auxiliary contacts: 2 NC, screw terminal, size: S2 $\,$


product brand name	SIRIUS
product designation	capacitor contactors
product type designation	3RT26
General technical data	
size of contactor	S2
product extension auxiliary switch	Yes
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	6.8g / 5 ms, 4g / 10 ms
• at DC	6,8g / 5 ms, 4g / 10 ms
shock resistance with sine pulse	
• at AC	10.6g / 5 ms, 6.2g / 10 ms
• at DC	10,6g / 5 ms, 6,2g / 10 ms
mechanical service life (operating cycles)	
 of the contactor with added auxiliary switch block typical 	3 000 000
electrical endurance (operating cycles)	200 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operational current at AC-6b at 690 V at ambient temperature 60 °C rated value	72.2 A
operating reactive power at AC-6b	
• at 230 V at 50/60 Hz at ambient temperature 60 °C rated	10 29 kvar

value	
 at 400 V at 50/60 Hz at ambient temperature 60 °C rated value 	17 50 kvar
• at 500 V at 50/60 Hz at ambient temperature 60 °C rated	21 63 kvar
value	21 05 KVdi
• at 690 V at 50/60 Hz at ambient temperature 60 °C rated	29 86 kvar
value	
no-load switching frequency	
• at AC	500 1/h
• at DC	500 1/h
operating frequency at AC-6b	
• at 230 V maximum	100 1/h
• at 240 V maximum	100 1/h
• at 400 V maximum	100 1/h
• at 480 V maximum	60 1/h
• at 500 V maximum	55 1/h
• at 600 V maximum	40 1/h
• at 690 V maximum	30 1/h
Control circuit/ Control	
type of voltage	AC/DC
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
• at 50 Hz rated value	20 33 V
• at 60 Hz rated value	20 33 V
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
	00 HZ
control supply voltage at DC	20 20 1/
rated value	20 33 V
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.8
• full-scale value	1.1
	1.1
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.8 1.1
inrush current peak	30 A
	30 µs
duration of inrush current peak	
locked-rotor current mean value	6.5 A
locked-rotor current peak	12 A
duration of locked-rotor current	230 ms
holding current mean value	105 mA
apparent pick-up power of magnet coil at AC	110 VA
inductive power factor with closing power of the coil	0.95
apparent holding power of magnet coil at AC	2.5 VA
inductive power factor with the holding power of the coil	0.95
closing power of magnet coil at DC	70 W
holding power of magnet coil at DC	1.5 W
closing delay	
• at AC	30 110 ms
• at DC	30 110 ms
opening delay	
• at AC	30 55 ms
• at DC	30 55 ms
	10 20 ms
arcing time	
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts	2
attachable	1
instantaneous contact	2
number of NO contacts for auxiliary contacts	0

• attachable	1			
instantaneous contact	0			
operational current of auxiliary contacts at AC-12 maximum	10 A			
operational current of auxiliary contacts at AC-15				
• at 230 V	6 A			
• at 400 V	3 A			
• at 690 V	0 A			
operational current of auxiliary contacts at DC-13				
• at 24 V	6 A			
• at 60 V	2 A			
● at 110 V	1 A			
• at 125 V	0.9 A			
• at 220 V	0.3 A			
contact reliability of auxiliary contacts	0.0000001			
UL/CSA ratings				
contact rating of auxiliary contacts according to UL	A600 / Q600			
Short-circuit protection				
design of the fuse link				
 for short-circuit protection of the main circuit with type of coordination 1 required 	gG: 160 A (690 V, 50 kA)			
 for short-circuit protection of the auxiliary switch required 	gG: 10 A (500 V, 1 kA)			
Installation/ mounting/ dimensions				
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface			
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022			
height	114 mm			
width	65 mm			
depth	130 mm			
required spacing				
• with side-by-side mounting at the side	10 mm			
 for grounded parts at the side 	10 mm			
Connections/ Terminals				
Connections/ Terminals type of electrical connection				
	screw-type terminals			
type of electrical connection	screw-type terminals screw-type terminals			
type of electrical connection • for main current circuit				
type of electrical connection for main current circuit for auxiliary and control circuit 	screw-type terminals			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts	screw-type terminals Screw-type terminals			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil	screw-type terminals Screw-type terminals			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts	screw-type terminals Screw-type terminals Screw-type terminals			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²)			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²) 2x (10 35 mm ²), 1x (10 50 mm ²)			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²) 2x (10 35 mm ²), 1x (10 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²) 2x (10 35 mm ²), 1x (10 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • finely stranded with core end processing type of connectable conductor cross-sections	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²) 2x (10 35 mm ²), 1x (10 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²) 2x (1 35 mm ²), 1x (10 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 25 mm ²), 1x (1 35 mm ²)			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts • for auxiliary contacts • for auxiliary contacts • solid	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²) 2x (10 35 mm ²), 1x (10 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 25 mm ²), 1x (1 35 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ²			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts • solid • auxiliary contacts • solid • solid • solid or stranded	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²) 2x (10 35 mm ²), 1x (10 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 25 mm ²), 1x (1 35 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ²			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts - solid - solid - solid or stranded - minely stranded with core end processing	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²) 2x (10 35 mm ²), 1x (10 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 25 mm ²), 1x (1 35 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts • for auxiliary contacts • solid • for auxiliary contacts • for auxiliary contacts - solid - solid or stranded - finely stranded with core end processing • for AWG cables for auxiliary contacts type of minimum connectable cross-sections for main	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²) 2x (10 35 mm ²), 1x (10 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 25 mm ²), 1x (1 35 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts - solid - solid - solid or stranded - finely stranded with core end processing • for auxiliary contacts - solid - solid or stranded - finely stranded with core end processing • for AWG cables for auxiliary contacts type of minimum connectable cross-sections for main contacts at AC-6b	screw-type terminals Screw-type terminals Screw-type terminals $2x (1 16 mm^2)$ $2x (10 35 mm^2), 1x (10 50 mm^2)$ $2x (1 35 mm^2), 1x (1 50 mm^2)$ $2x (1 25 mm^2), 1x (1 35 mm^2)$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts - solid - solid - solid or stranded - finely stranded with core end processing • for auxiliary contacts - solid - solid or stranded - finely stranded with core end processing • for AWG cables for auxiliary contacts type of minimum connectable cross-sections for main contacts at AC-6b • at 40 °C	screw-type terminals Screw-type terminals Screw-type terminals $2x (1 16 mm^2)$ $2x (10 35 mm^2), 1x (10 50 mm^2)$ $2x (1 35 mm^2), 1x (1 50 mm^2)$ $2x (1 25 mm^2), 1x (1 35 mm^2)$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2)$ 2x (20 16), 2x (18 14), 2x 12			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts - solid - solid - solid or stranded - finely stranded with core end processing • for auxiliary contacts - solid - solid or stranded - finely stranded with core end processing • for AWG cables for auxiliary contacts type of minimum connectable cross-sections for main contacts at AC-6b • at 40 °C • at 60 °C AWG number as coded connectable conductor cross section for	screw-type terminals Screw-type terminals Screw-type terminals $2x (1 16 mm^2)$ $2x (10 35 mm^2), 1x (10 50 mm^2)$ $2x (1 35 mm^2), 1x (1 50 mm^2)$ $2x (1 25 mm^2), 1x (1 35 mm^2)$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ 2x (20 16), 2x (18 14), 2x 12 $1x 35 mm^2$ $1x 35 mm^2$			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts - solid - solid - solid or stranded - finely stranded with core end processing • for auxiliary contacts - solid - solid or stranded - finely stranded with core end processing • for AWG cables for auxiliary contacts type of minimum connectable cross-sections for main contacts at AC-6b • at 40 °C • at 60 °C AWG number as coded connectable conductor cross section for main contacts	screw-type terminals Screw-type terminals Screw-type terminals $2x (1 16 mm^2)$ $2x (10 35 mm^2), 1x (10 50 mm^2)$ $2x (1 35 mm^2), 1x (1 50 mm^2)$ $2x (1 25 mm^2), 1x (1 35 mm^2)$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ 2x (20 16), 2x (18 14), 2x 12 $1x 35 mm^2$ $1x 35 mm^2$			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts - solid - solid - solid or stranded - solid or stranded - finely stranded with core end processing • for AWG cables for auxiliary contacts type of minimum connectable cross-sections for main contacts at AC-6b • at 40 °C • at 60 °C AWG number as coded connectable conductor cross section for main contacts Safety related data	screw-type terminals Screw-type terminals Screw-type terminals $2x (1 16 mm^2)$ $2x (10 35 mm^2), 1x (10 50 mm^2)$ $2x (1 35 mm^2), 1x (1 50 mm^2)$ $2x (1 25 mm^2), 1x (1 35 mm^2)$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ $2x (0.5 1.5 mm^2), 2x (0.75 2.5 mm^2), 2x 4 mm^2$ 2x (20 16), 2x (18 14), 2x 12 $1x 35 mm^2$ $1x 35 mm^2$			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts - solid - solid - solid or stranded - at 0°C • at 40 °C • at 60 °C A	screw-type terminals Screw-type terminals Screw-type terminals 2x (1 16 mm ²) 2x (10 35 mm ²), 1x (10 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 25 mm ²), 1x (1 35 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 2x (20 16), 2x (18 14), 2x 12 1x 35 mm ² 1x 50 mm ² 18 0			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts - solid - solid - solid or stranded - solid or stranded - finely stranded with core end processing • for auxiliary contacts - solid - solid or stranded - finely stranded with core end processing • for AWG cables for auxiliary contacts type of minimum connectable cross-sections for main contacts at AC-6b • at 40 °C • at 40 °C • at 60 °C AWG number as coded connectable conductor cross section for main contacts Safety related data product function • mirror contact according to IEC 60947-4-1	screw-type terminals Screw-type terminals 2x (1 16 mm²) 2x (1 0 35 mm²), 1x (1 0 50 mm²) 2x (1 35 mm²), 1x (1 50 mm²) 2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (20 16), 2x (18 14), 2x 12 1x 35 mm² 1x 50 mm² 18 0 No			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts - solid - solid or stranded - solid or stranded - solid or stranded - finely stranded with core end processing • for AWG cables for auxiliary contacts - solid or stranded - finely stranded with core end processing • for AWG cables for auxiliary contacts type of minimum connectable cross-sections for main contacts at AC-6b • at 40 °C • at 40 °C • at 60 °C AWG number as coded connectable conductor cross section for main contacts Safety related data product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1	screw-type terminals Screw-type terminals 2x (1 16 mm²) 2x (1 0 35 mm²), 1x (1 0 50 mm²) 2x (1 35 mm²), 1x (1 50 mm²) 2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (20 16), 2x (18 14), 2x 12 1x 35 mm² 1x 35 mm² 1x 30 mm² 18 0 No No			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary contacts - solid - solid or stranded - solid or stranded - finely stranded with core end processing • for auxiliary contacts - solid or stranded - solid or stranded - finely stranded with core end processing • for AWG cables for auxiliary contacts type of minimum connectable cross-sections for main contacts at AC-6b • at 40 °C • at 40 °C • at 60 °C AWG number as coded connectable conductor cross section for main contacts Safety related data product function • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 protection class IP on the front according to IEC 60529 <td>screw-type terminals Screw-type terminals 2x (1 16 mm²) 2x (1 35 mm²), 1x (10 50 mm²) 2x (1 35 mm²), 1x (1 50 mm²) 2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 50 mm²) 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2x (20 16), 2x (18 14), 2x 12 1x 35 mm² 1x 35 mm² 1x 30 mm² 18 0 No No No No IP20</td>	screw-type terminals Screw-type terminals 2x (1 16 mm²) 2x (1 35 mm²), 1x (10 50 mm²) 2x (1 35 mm²), 1x (1 50 mm²) 2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 50 mm²) 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2x (20 16), 2x (18 14), 2x 12 1x 35 mm² 1x 35 mm² 1x 30 mm² 18 0 No No No No IP20			

General Product Ap	proval				
	<u>Confirmation</u>			<u>KC</u>	EAC
EMC	Declaration of Confor	rmity	Test Certificates	Marine / Shipping	
RCM	CE EG-Konf.	UK CA	Type Test Certific- ates/Test Report	Llovd's Register us	RINA
other	Dangerous Good				
Confirmation	Transport Information				
https://press.siemens Siemens is working	ed to exit the Russian mar .com/global/en/pressrelease on the renewal of the cur ocal Siemens office on the s	e/siemens-wind-down-ru rent EAC certificates.		d to import or offer to suppl	w these products to an
EAC relevant market	(other than the sanctioned				y these products to an
	ry.siemens.com/cs/ww/en/v				
Information- and Do https://www.siemens.	wnloadcenter (Catalogs, I <u>com/ic10</u>	Brochures,)			
Industry Mall (Onlin https://mall.industry.s	e ordering system) iemens.com/mall/en/en/Cat	alog/product?mlfb=3RT2	2636-1NB35		
Cax online generate	tion.siemens.com/WW/CAX	order/default aspx?lang	=en&mlfb=3RT2636-1NB3	5	
Service&Support (N	lanuals, Certificates, Char	acteristics, FAQs,)			
Image database (pro	ry.siemens.com/cs/ww/en/p oduct images, 2D dimensi	on drawings, 3D model		ıs, EPLAN macros,)	
	n.siemens.com/bilddb/cax_	de.aspx?mitb=3R12636-	-TINB35⟨=en		
	ping characteristics, I2t, Le				
https://support.indust	bing characteristics, l ² t, Le r <u>y.siemens.com/cs/ww/en/p</u> ics (e.g. electrical endura	s/3RT2636-1NB35/char	cy)		

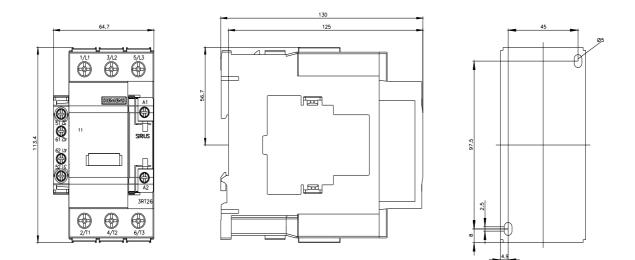

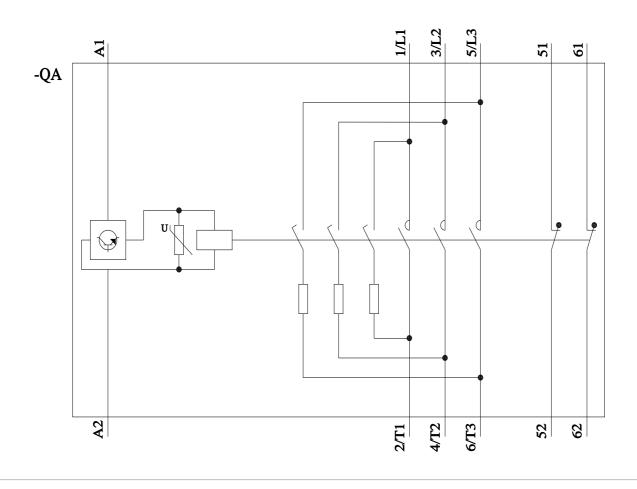

11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RT26361NB35