## **SIEMENS**

Data sheet 3RU2116-1BB0



Overload relay 1.4...2.0 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	5.7 W
• per pole	1.9 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
between main and auxiliary circuit	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-40 +70 °C
<ul> <li>during storage</li> </ul>	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	1.4 2 A
operating voltage	
rated value	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	2 A
operational current at AC-3e at 400 V rated value	2 A
operating power	

• at AC-3	
— at 400 V rated value	0.75 kW
— at 500 V rated value	0.75 kW
— at 690 V rated value	1.1 kW
• at AC-3e	
— at 400 V rated value	0.75 kW
— at 500 V rated value	0.75 kW
— at 690 V rated value	1.1 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
● at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions trip class	CLASS 10
Protective and monitoring functions trip class	CLASS 10 thermal
Protective and monitoring functions trip class design of the overload release	
Protective and monitoring functions trip class design of the overload release UL/CSA ratings	
Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor	thermal
Protective and monitoring functions trip class design of the overload release UL/CSA ratings	
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value	thermal 2 A
Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	thermal 2 A
Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link	thermal  2 A 2 A
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required	thermal 2 A
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	thermal  2 A 2 A fuse gG: 6 A, quick: 10 A
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position	thermal  2 A 2 A fuse gG: 6 A, quick: 10 A any
Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	thermal  2 A 2 A 10 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height	thermal  2 A 2 A 2 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method  height  width	thermal  2 A 2 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth	thermal  2 A 2 A 2 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals	thermal  2 A 2 A 2 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth	thermal  2 A 2 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and	thermal  2 A 2 A 2 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection	thermal  2 A 2 A 2 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit	thermal  2 A 2 A 2 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection	thermal  2 A 2 A 2 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current	thermal  2 A 2 A 2 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  Screw-type terminals screw-type terminals
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit	thermal  2 A 2 A 2 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  Screw-type terminals screw-type terminals
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	thermal  2 A 2 A 2 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded	thermal  2 A 2 A 2 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
Protective and monitoring functions  trip class  design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts	thermal  2 A 2 A 2 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing • for AWG cables for main contacts	thermal  2 A 2 A 2 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
trip class design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	thermal  2 A 2 A 2 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)

2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
2x (20 16), 2x (18 14)
0.8 1.2 N·m
0.8 1.2 N·m
Diameter 5 6 mm
Pozidriv PZ 2
M3
M3
50 FIT
2 280 a
20 a
IP20
finger-safe, for vertical contact from the front
Slide switch

**(((**)

Confirmation







For use in hazardous locations



**Declaration of Conformity** 

**General Product Approval** 

**Test Certificates** 

Marine / Shipping





Type Test Certificates/Test Report

Special Test Certificate





Marine / Shipping





LRS







Confirmation

other

other

Railway



Vibration and Shock

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1BB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1BB0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1BB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2116-1BB0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1BB0/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1BB0&objecttype=14&gridview=view1

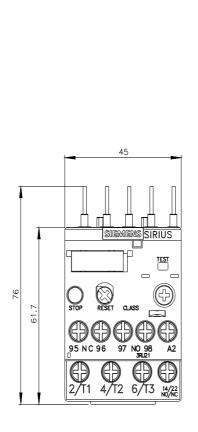

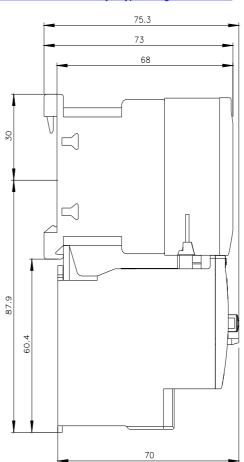

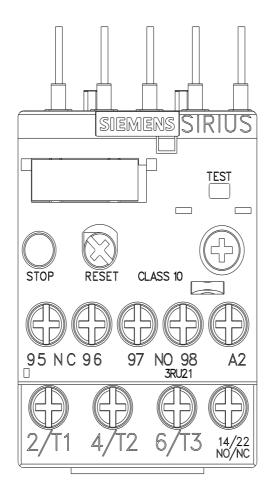

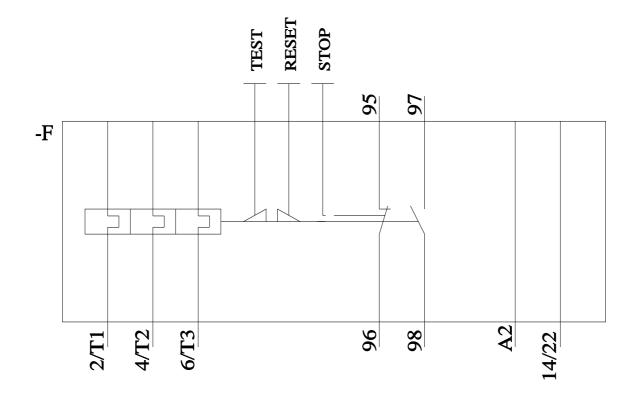

last modified: 3/8/2022 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RU21161BB0