SIEMENS

Data sheet 3RU2116-1EC0



Overload relay 2.8...4.0 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Spring-type terminal Auxiliary circuit: spring-type terminal Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	5.7 W
• per pole	1.9 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
between main and auxiliary circuit	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-40 +70 °C
during storage	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	2.8 4 A
operating voltage	
• rated value	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	4 A
operational current at AC-3e at 400 V rated value	4 A
operating power	

 at AC-3 at 400 V rated value at 500 V rated value at 690 V rated value at AC-3e at 400 V rated value 1.5 kW 1.5 kW 	
 — at 500 V rated value — at 690 V rated value at AC-3e 2.2 kW 3 kW 	
— at 690 V rated value 3 kW • at AC-3e	
• at AC-3e	
— at 400 V Tated Value	
— at 500 V rated value 2.2 kW	
— at 500 V rated value— at 690 V rated value3 kW	
Auxiliary circuit	
design of the auxiliary switch integrated	
number of NC contacts for auxiliary contacts 1	
• note for contactor disconnection	
number of NO contacts for auxiliary contacts 1	
• note for message "Tripped"	
number of CO contacts for auxiliary contacts 0	
operational current of auxiliary contacts at AC-15	
• at 24 V 3 A	
• at 110 V 3 A	
• at 120 V 3 A	
• at 125 V 3 A	
• at 230 V 2 A	
• at 400 V	
● at 690 V 0.75 A	
operational current of auxiliary contacts at DC-13	
• at 24 V 2 A	
• at 60 V 0.3 A	
• at 110 V 0.22 A	
• at 125 V 0.22 A	
• at 220 V 0.11 A	
contact rating of auxiliary contacts according to UL B600 / R300	
Protective and monitoring functions	
trip class CLASS 10	
design of the overload release thermal	
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value 4 A	
a at 600 V rated value	
at 600 V rated value 4 A Short circuit protection	
Short-circuit protection	
Short-circuit protection design of the fuse link	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions fuse gG: 6 A, quick: 10 A	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any fastening method Contactor mounting	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any fastening method Contactor mounting	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any fastening method Contactor mounting height 87 mm	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any fastening method Contactor mounting height 87 mm width 45 mm	
Short-circuit protection design of the fuse link ● for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any fastening method Contactor mounting height 87 mm width 45 mm depth 70 mm	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any fastening method Contactor mounting height 87 mm width 45 mm depth 70 mm Connections/ Terminals product component removable terminal for auxiliary and No	
Short-circuit protection design of the fuse link ● for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any fastening method Contactor mounting height 87 mm width 45 mm depth 70 mm Connections/ Terminals product component removable terminal for auxiliary and control circuit	
Short-circuit protection design of the fuse link	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method Contactor mounting height 87 mm width 45 mm depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit spring-loaded terminals	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any fastening method Contactor mounting height 87 mm width 45 mm depth 70 mm Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit spring-loaded terminals • for auxiliary and control circuit Top and bottom Top and bottom	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any fastening method Contactor mounting height 87 mm width 45 mm depth 70 mm Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit spring-loaded terminals • for auxiliary and control circuit spring-loaded terminals arrangement of electrical connectors for main current circuit Top and bottom	
Short-circuit protection design of the fuse link	
Short-circuit protection design of the fuse link	
Short-circuit protection design of the fuse link	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A Installation/ mounting/ dimensions mounting position any fastening method Contactor mounting height 87 mm width 45 mm depth 70 mm Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit spring-loaded terminals arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing 1x (0,5 4 mm²) 1x (0,5 2.5 mm²)	

• for auxiliary contacts - solid or stranded 2x (0.5 ... 2.5 mm²) - finely stranded with core end processing 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) - finely stranded without core end processing 2x (0.5 ... 1.5 mm²) • for AWG cables for auxiliary contacts 2x (20 ... 14) design of screwdriver shaft Diameter 3 mm size of the screwdriver tip 3,0 x 0,5 mm Safety related data failure rate [FIT] with low demand rate according to SN 31920 50 FIT MTTF with high demand rate 2 280 a T1 value for proof test interval or service life according to IEC 20 a 61508 IP20 protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front display version for switching status Slide switch

Certificates/ approvals

General Product Approval

For use in hazardous locations

Confirmation











Declaration of Conformity

Test Certificates

Marine / Shipping





Special Test Certificate Type Test Certificates/Test Report





Marine / Shipping











Confirmation

other

other

Railway



Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1EC0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1EC0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


 $\underline{https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1EC0}$


 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2116-1EC0&lang=en

 $Characteristic: Tripping\ characteristics,\ I^2t,\ Let\text{-through}\ current$

https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1EC0/char

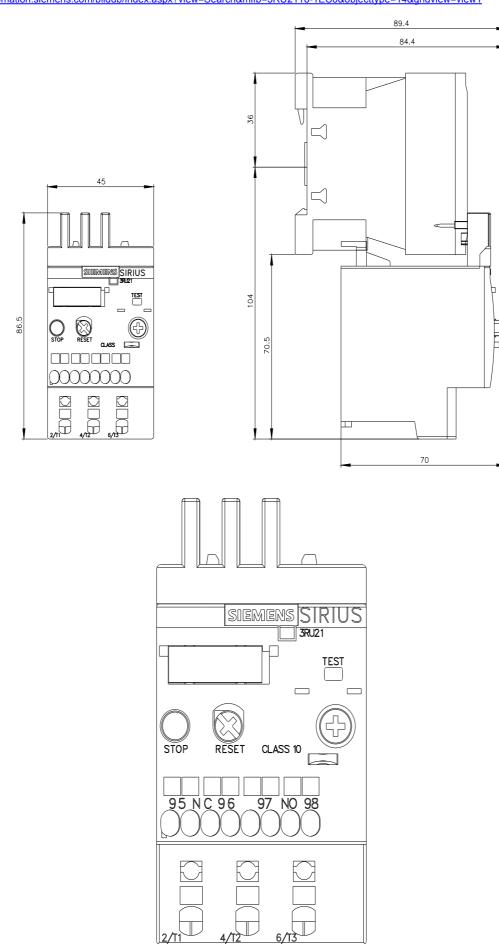

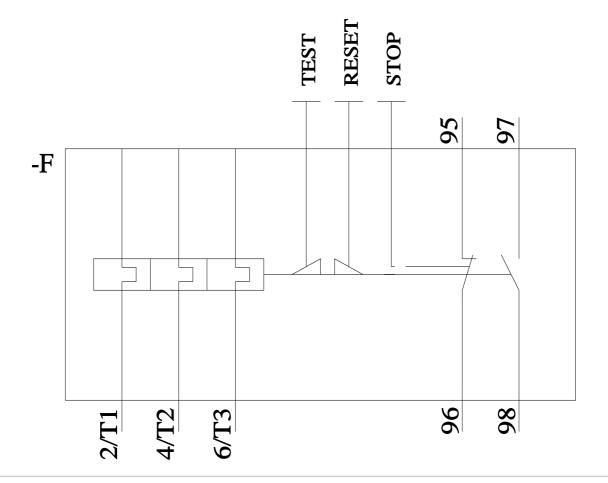

last modified: 3/8/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RU21161EC0