SIEMENS

Data sheet

3RU2126-4PC1




Overload relay 30...36 A Thermal For motor protection Size S0, Class 10 Standalone installation Main circuit: Spring-type terminal Auxiliary circuit: spring-type terminal Manual-Automatic-Reset


product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	SO
size of contactor can be combined company-specific	SO
power loss [W] for rated value of the current at AC in hot operating state	9.6 W
• per pole	3.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-40 +70 °C
 during storage 	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	30 36 A
operating voltage	
 rated value 	690 V
 at AC-3e rated value maximum 	690 V
operating frequency rated value	50 60 Hz
operational current rated value	36 A
operational current at AC-3e at 400 V rated value	36 A
operating power	


• at AC-3	
	40 E MM
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
— at 690 V rated value	30 kW
• at AC-3e	
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
— at 690 V rated value	30 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 24 V	0.3 A
• at 110 V	0.22 A
	0.22 A
• at 125 V	
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	
	01.400.40
trip class	CLASS 10
trip class design of the overload release	CLASS 10 thermal
trip class design of the overload release UL/CSA ratings	
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor	thermal
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	thermal 36 A
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	thermal
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	thermal 36 A
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	thermal 36 A 36 A
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required	thermal 36 A
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link	thermal 36 A 36 A
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required	thermal 36 A 36 A
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	thermal 36 A 36 A fuse gG: 6 A, quick: 10 A
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	thermal 36 A 36 A fuse gG: 6 A, quick: 10 A any
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	thermal 36 A 36 A fuse gG: 6 A, quick: 10 A any stand-alone installation
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	thermal 36 A 36 A 36 A fuse gG: 6 A, quick: 10 A any stand-alone installation 114 mm
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	thermal 36 A 36 A 36 A fuse gG: 6 A, quick: 10 A any stand-alone installation 114 mm 45 mm
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	thermal 36 A 36 A 36 A fuse gG: 6 A, quick: 10 A any stand-alone installation 114 mm 45 mm
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and	thermal 36 A 36 A 36 A 36 A 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	thermal 36 A 36 A 36 A fuse gG: 6 A, quick: 10 A any stand-alone installation 114 mm 45 mm 95 mm
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection 	thermal 36 A 36 A 36 A fuse gG: 6 A, quick: 10 A any stand-alone installation 114 mm 45 mm 95 mm No
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit 	thermal 36 A 36 A 36 A 36 A 37 A 39 A 39 A 39 A 39 A 30
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit arrangement of electrical connectors for main current	thermal 36 A 36 A 36 A 37 A 37 A 38 A 39 A 39 A 39 A 30
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	thermal 36 A 36 A 36 A 37 A 37 A 38 A 39 A 39 A 39 A 30
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection e for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	thermal 36 A 36 A 36 A 37 A 37 A 38 A 39 A 39 A 39 A 30
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts 	thermal 36 A 36 A 36 A 36 A 37 A 39 A 39 A 39 A 39 A 30
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/mounting/dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts solid or stranded 	thermal 36 A 36 A 36 A 36 A 37 A 39
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit arrangement of electrical connectors for main current circuit for main contacts asolid or stranded main corte and with core end processing 	thermal 36 A 36 A 36 A 36 A 1 fuse gG: 6 A, quick: 10 A any stand-alone installation 114 mm 45 mm 95 mm No spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm²) 1x (1 6 mm²) 1x (1 6 mm²)
trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/mounting/dimensions mounting position fastening method height width depth Connections/Terminals product component removable terminal for auxiliary and control circuit type of electrical connection ofor auxiliary and control circuit arrangement of electrical connectors for main current circuit of romain contacts of romain contacts	thermal 36 A 36 A 36 A 37 A 37 A 45 mm 95 mm 95 mm 114 mm 45 mm 95 mm 114 mm 11


 for auxiliary containing 	acte					
 Ior auxiliary conta — solid or stra 			2x (0.5 2.5 mm²)			
	led with core end proces	ssina		$5 - 2.5 \mathrm{mm^2}$		
-	-	-	2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)			
	led without core end pro	ocessing	2x (0.5 1.5 mm ²)			
for AWG cables for auxiliary contacts		2x (20 14) Diameter 3 mm				
size of the screwdrive	r tip		3,0 x 0,5 mm			
Safety related data						
failure rate [FIT] with low demand rate according to SN 31920			50 FIT			
MTTF with high demand rate		2 280 a				
T1 value for proof test interval or service life according to IEC 61508		20 a				
protection class IP on the front according to IEC 60529		IP20				
-	touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front			
Display	, , , , , , , , , , , , , , , , , , ,		3 , .			
display version for switc	hing status		Slide switch			
Certificates/ approvals			Olde Switch			
				For you in honorday	e le setiene	
General Product Appr	ovai			For use in hazardou	s locations	
	Confirmation	-				
(m)	Commation	መ	107	(c.)	IECEx	
		<u>s</u>	r m i	$\langle cx \rangle$	· · ·	
ccc		UL		ATEX	IECEx	
Declaration of Confor	mity	Test Certificat	es	Marine / Shipping		
"		Special Test Ce ate	ertific- <u>Type Test Certific</u> ates/Test Report	State State		
	22			· .	「支」の	
EG-Konf.	LH			ABS		
					VERITAS	
Marine / Shipping					other	
ቶ Å	Lloyde	(And a			Confirmation	
Ψ ω	Register		(3)			
DNV	LRS	PRS	RINA	RMRS		
Railway						
Vibration and Shock						
Further information						
Siemens has decided	to exit the Russian ma	arket (see here).				
https://press.siemens.co Siemens is working or						
			the EAC certification if you inte	end to import or offer to sur	oply these products to an	
EAC relevant market (of	ther than the sanctioned					
Information on the pach https://support.industry.s	kaging	wiew/100012075				
Information- and Dow						
https://www.siemens.co		, 5100110103,)				
Industry Mall (Online o						
https://mall.industry.sier	nens.com/mall/en/en/Ca	atalog/product?mlfb	<u>=3RU2126-4PC1</u>			
Cax online generator	n.siemens.com/WW/CA	Xorder/default asp	(?lang=en&mlfb=3RU2126-4P(01		
Service&Support (Mar				<u>~ -</u>		
https://support.industry.			· · ·			
Image database (prode		ps/3RU2126-4PC1				
	siemens.com/cs/ww/en/ uct images, 2D dimens	sion drawings, 3D	models, device circuit diagra	ms, EPLAN macros,)		
	siemens.com/cs/ww/en/ uct images, 2D dimens siemens.com/bilddb/cax	sion drawings, 3D _de.aspx?mlfb=3Rl	J2126-4PC1⟨=en	ms, EPLAN macros,)		
http://www.automation.s Characteristic: Trippin https://support.industry.s	siemens.com/cs/ww/en/ uct images, 2D dimens siemens.com/bilddb/cax ng characteristics, I²t, I	sion drawings, 3D _de.aspx?mlfb=3Rl Let-through curren	J2126-4PC1⟨=en It	ms, EPLAN macros,)		


Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-4PC1&objecttype=14&gridview=view1

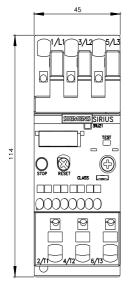

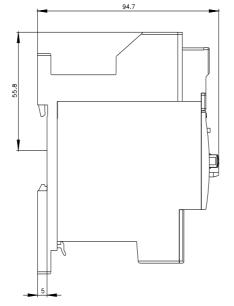

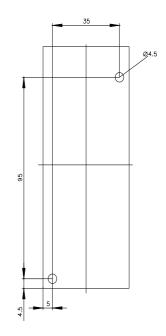

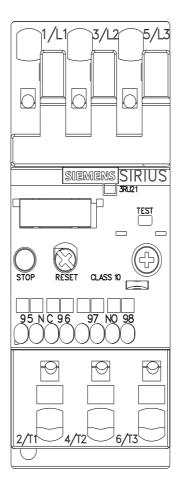

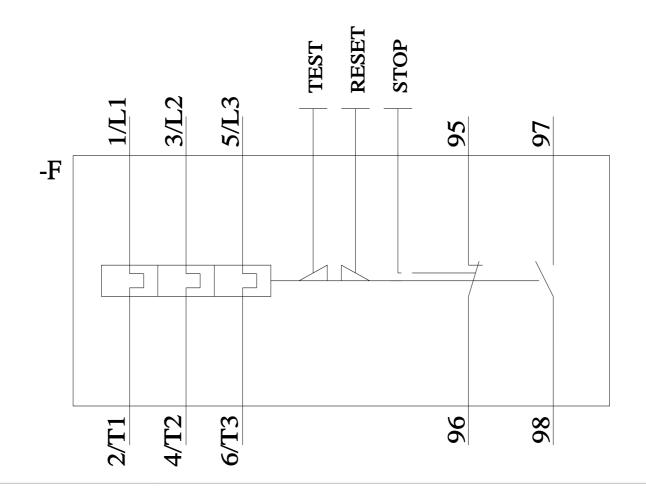

last modified:



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RU21264PC1