SIEMENS

Data sheet

3RV2011-0JA25



Circuit breaker size S00 for motor protection, CLASS 10 A-release 0.7...1 A N-release 13 A Spring-type terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC


product brand name	SIRIUS		
product designation	Circuit breaker		
design of the product	For motor protection		
product type designation	3RV2		
General technical data			
size of the circuit-breaker	S00		
size of contactor can be combined company-specific	S00, S0		
product extension auxiliary switch	Yes		
power loss [W] for rated value of the current			
 at AC in hot operating state 	7.25 W		
 at AC in hot operating state per pole 	2.4 W		
insulation voltage with degree of pollution 3 at AC rated value	690 V		
surge voltage resistance rated value	6 kV		
shock resistance according to IEC 60068-2-27	25g / 11 ms		
mechanical service life (operating cycles)			
 of the main contacts typical 	100 000		
 of auxiliary contacts typical 	100 000		
electrical endurance (operating cycles) typical	100 000		
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD		
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001		
reference code according to IEC 81346-2	Q		
Substance Prohibitance (Date)	10/01/2009		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
during operation	-20 +60 °C		
during storage	-50 +80 °C		
during transport	-50 +80 °C		
relative humidity during operation	10 95 %		
Main circuit			
number of poles for main current circuit	3		
adjustable current response value current of the current- dependent overload release	0.7 1 A		
operating voltage			
rated value	20 690 V		
 at AC-3 rated value maximum 	690 V		
• at AC-3e rated value maximum	690 V		
operating frequency rated value	50 60 Hz		
operational current rated value	1 A		
operational current			


 at AC-3 at 400 V rated value 	1 A
 at AC-3e at 400 V rated value 	1 A
operating power	
• at AC-3	
— at 230 V rated value	0.2 kW
— at 400 V rated value	0.25 kW
— at 500 V rated value	0.4 kW
— at 690 V rated value	0.6 kW
• at AC-3e	
— at 230 V rated value	0.2 kW
— at 400 V rated value	0.25 kW
— at 500 V rated value	0.4 kW
— at 690 V rated value	0.6 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
design of the auxiliary switch	transverse
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	2 A
• at 24 V • at 120 V	0.5 A
• at 125 V	0.5 A
• at 230 V	0.5 A
operational current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 60 V	0.15 A
Protective and monitoring functions	
product function	
 ground fault detection 	No
phase failure detection	Yes
trip class	CLASS 10
design of the overload release	thermal
maximum short-circuit current breaking capacity (lcu)	
 maximum short-circuit current breaking capacity (Icu) at AC at 240 V rated value 	100 kA
	100 kA 100 kA
• at AC at 240 V rated value	
at AC at 240 V rated valueat AC at 400 V rated value	100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value 	100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value 	100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (lcs) at AC	100 kA 100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value Operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value 	100 kA 100 kA 100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (lcs) at AC at 240 V rated value at 400 V rated value 	100 kA 100 kA 100 kA 100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value to 690 V rated value at 690 V rated value at 690 V rated value 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value to the fourth of the fourth	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 13 A
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 13 A
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 600 V rated value 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 13 A
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 1 A
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (lcs) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value 	100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value at AC at 690 V rated value at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 600 V rated value be for 3-phase AC motor at 575/600 V rated value contact rating of auxiliary contacts according to UL 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 1 A
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (lcs) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value full-load current (FLA) for 3-phase AC motor at 600 V rated value at 600 V rated value at 600 V rated value for 3-phase AC motor at 575/600 V rated value contact rating of auxiliary contacts according to UL 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 13 A 13 A 1 A 1 A 1 A 2 Comparison of the second se
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value bit 600 V rated value bit 600 V rated value bit 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection 	100 kA 100 kA 10
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value at AC at 690 V rated value at 240 V rated value at 400 V rated value at 690 V rated value at 690 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value bit full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value bit 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 13 A 13 A 0.5 hp C300 / R300
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value at AC at 690 V rated value at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 600 V rated value at 480 V rated value at 600 V rated value bit 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link 	100 kA 100 kA
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value at AC at 690 V rated value at 240 V rated value at 400 V rated value at 690 V rated value at 690 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value bit full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value bit 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip 	100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 13 A 1 A 1 A 1 A 1 A 1 A 1 A 1 A 1
 at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value at AC at 690 V rated value at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value bit for 3-phase AC motor at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip 	100 kA 100 kA


protection of the main sizewit	
protection of the main circuit	
● at 500 V ● at 690 V	gL/gG 10 A gL/gG 10 A
• at 690 v Installation/ mounting/ dimensions	gL/gG T0 A
mounting position	2014
	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
fastening method	106 mm
height width	45 mm
depth	97 mm
required spacing	
with side-by-side mounting at the side	0 mm
 for grounded parts at 400 V 	· min
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 400 V	o min
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
 for grounded parts at 500 V 	
- downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
 for grounded parts at 690 V 	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
 for live parts at 690 V 	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	spring-loaded terminals
 for auxiliary and control circuit 	spring-loaded terminals
arrangement of electrical connectors for main current	Top and bottom
circuit	
type of connectable conductor cross-sections	
for main contacts	$2 \times (0.5 - 4 \text{ mm}^2)$
— solid or stranded	$2x (0.5 \dots 4 \text{ mm}^2)$
 finely stranded with core end processing finely stranded without core and processing 	$2x (0.5 \dots 2.5 \text{ mm}^2)$
 finely stranded without core end processing for AWC cobles for main contacts 	2x (0.5 2.5 mm ²)
• for AWG cables for main contacts	2x (20 12)
type of connectable conductor cross-sections	
 for auxiliary contacts — solid or stranded 	$2 \times (0.5 - 2.5 \text{ mm}^2)$
	$2x (0.5 \dots 2.5 \text{ mm}^2)$
 finely stranded with core end processing 	$2x (0.5 \dots 1.5 \text{ mm}^2)$
 finely stranded without core end processing for AWG cables for auxiliary contacts 	2x (0.5 1.5 mm²) 2x (20 14)
design of screwdriver shaft	Diameter 3 mm
size of the screwdriver tip	3,0 x 0,5 mm
Safety related data	0,0 X 0,0 mm
B10 value	
Div Value	

 with high deman 	d rate according to SN 319	020	5 000			
proportion of dangero	ous failures					
 with low demand rate according to SN 31920 		50 %	50 %			
 with high deman 	d rate according to SN 319	020	50 %			
failure rate [FIT]						
with low demand rate according to SN 31920		50 FIT				
T1 value for proof test i 61508	nterval or service life acco	rding to IEC	10 a			
protection class IP on the front according to IEC 60529		IP20	IP20			
touch protection on the	ne front according to IEC	60529	finger-	safe, for vertical contact	from the front	
display version for swite	ching status		Handle	e		
Certificates/ approvals						
General Product App	roval				For use in hazardous	locations
	<u>Confirmation</u>	(UL)		EHC	K ATEX	IECEx
Declaration of Confor	rmity	Test Certificate	es		Marine / Shipping	
CE EG-Konf.	UK CA	<u>Type Test Cert</u> ates/Test Rep	<u>tific-</u> oort	Special Test Certific- ate	ABS	BUREAU VERITAS
Marine / Shipping					other	
	Lloyd's Register uts	PRS		RINA	<u>Confirmation</u>	
Railway						
Confirmation	Vibration and Shock					

	ns has decided to exit the Russian market (see here). press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business
Siemer Please	is is working on the renewal of the current EAC certificates. contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to a levant market (other than the sanctioned EAEU member states Russia or Belarus).
	ation on the packaging support.industry.siemens.com/cs/ww/en/view/109813875
	ation- and Downloadcenter (Catalogs, Brochures,) www.siemens.com/ic10
	ry Mall (Online ordering system) nall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-0JA25
Cax on	line generator upport.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-0JA25
	Support (Manuals, Certificates, Characteristics, FAQs,)
	database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,) ww.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-0JA25⟨=en
	support.industry.siemens.com/cs/ww/en/ps/3RV2011-0JA25/char
	r characteristics (e.g. electrical endurance, switching frequency) ww.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-0JA25&objecttype=14&gridview=view1

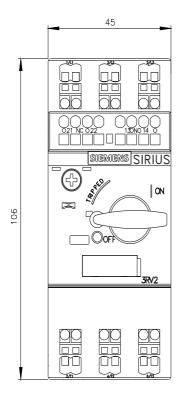


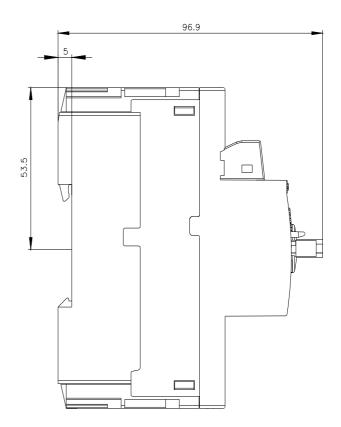

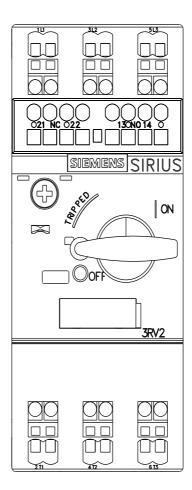

8/18/2023

Subject to change without notice © Copyright Siemens

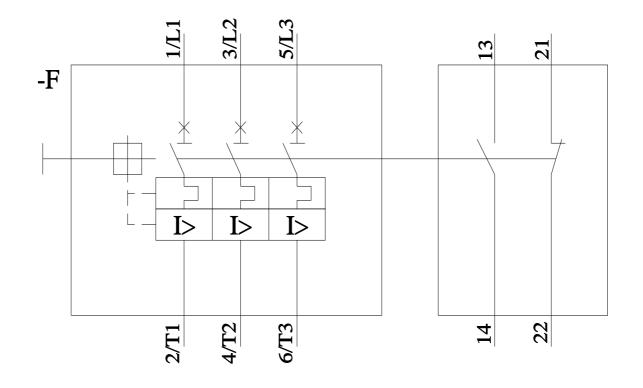

last modified:

11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RV20110JA25