3RV2011-1EA15-0BA0

Data sheet



Special type Circuit breaker size S00 for motor protection, CLASS 10 A-release 2.8...4 A N release 52 A screw terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC Ambient temperature -50 $^{\circ}\text{C}$ 500 switching cycles

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	7.25 W
 at AC in hot operating state per pole 	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	500
of auxiliary contacts typical	500
electrical endurance (operating cycles) typical	500
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-50 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	
to the state of th	10 95 %
Main circuit	10 95 %
, , ,	10 95 % 3
Main circuit	
Main circuit number of poles for main current circuit adjustable current response value current of the current-	3
Main circuit number of poles for main current circuit adjustable current response value current of the current- dependent overload release	3
Main circuit number of poles for main current circuit adjustable current response value current of the current- dependent overload release operating voltage	3 2.8 4 A
Main circuit number of poles for main current circuit adjustable current response value current of the current- dependent overload release operating voltage • rated value	3 2.8 4 A 20 690 V
Main circuit number of poles for main current circuit adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum	3 2.8 4 A 20 690 V 690 V
Main circuit number of poles for main current circuit adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value	3 2.8 4 A 20 690 V 690 V 50 60 Hz
Main circuit number of poles for main current circuit adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current rated value	3 2.8 4 A 20 690 V 690 V 50 60 Hz
Main circuit number of poles for main current circuit adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current rated value operational current	3 2.8 4 A 20 690 V 690 V 50 60 Hz 4 A
Main circuit number of poles for main current circuit adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current rated value operational current • at AC-3 at 400 V rated value	3 2.8 4 A 20 690 V 690 V 50 60 Hz 4 A

100011	22111	
— at 230 V rated value	0.8 kW	
— at 400 V rated value	1.5 kW	
— at 500 V rated value	2.2 kW	
— at 690 V rated value	3 kW	
operating frequency		
at AC-3 maximum	15 1/h	
Auxiliary circuit		
design of the auxiliary switch	transverse	
number of NC contacts for auxiliary contacts	1	
number of NO contacts for auxiliary contacts	1	
number of CO contacts for auxiliary contacts	0	
operational current of auxiliary contacts at AC-15		
● at 24 V	2 A	
● at 120 V	0.5 A	
● at 125 V	0.5 A	
• at 230 V	0.5 A	
operational current of auxiliary contacts at DC-13		
● at 24 V	1 A	
● at 60 V	0.15 A	
Protective and monitoring functions		
product function		
 ground fault detection 	No	
phase failure detection	Yes	
trip class	CLASS 10	
design of the overload release	thermal	
maximum short-circuit current breaking capacity (Icu)		
 at AC at 240 V rated value 	100 kA	
 at AC at 400 V rated value 	100 kA	
 at AC at 500 V rated value 	100 kA	
at AC at 690 V rated value	6 kA	
operating short-circuit current breaking capacity (Ics) at AC		
• at 240 V rated value	100 kA	
at 400 V rated value	100 kA	
at 500 V rated value	100 kA	
at 690 V rated value	4 kA	
response value current of instantaneous short-circuit trip unit	52 A	
Short-circuit protection		
product function short circuit protection	Yes	
design of the short-circuit trip	magnetic	
design of the fuse link		
for short-circuit protection of the auxiliary switch required	fuse gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A)	
design of the fuse link for IT network for short-circuit protection of the main circuit		
• at 400 V	gG 32 A	
• at 500 V	gG 32 A	
• at 690 V	gG 25 A	
Installation/ mounting/ dimensions		
mounting position	any	
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715	
height	97 mm	
width	45 mm	
depth	97 mm	
required spacing		
 with side-by-side mounting at the side 	0 mm	
 for grounded parts at 400 V 		
— downwards	30 mm	
— upwards	30 mm	
— at the side	9 mm	
• for live parts at 400 V		
— downwards	30 mm	
— upwards	30 mm	

General Product Approval	Declaration of Conformity	Test Certificates
ertificates/ approvais	D 1 " (0 ("	
<u> </u>		
display version for switching status	Handle	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
T1 value for proof test interval or service life according to IEC 61508 protection class IP on the front according to IEC 60529	10 a 	
afety related data		
of the auxiliary and control contacts	M3	
• for main contacts	M3	
design of the thread of the connection screw		
size of the screwdriver tip	Pozidriv size 2	
design of screwdriver shaft	Diameter 5 to 6 mm	
for auxiliary contacts with screw-type terminals	0.8 1.2 N·m	
 for main contacts with screw-type terminals 	0.8 1.2 N·m	
tightening torque		
finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
for auxiliary contacts		
type of connectable conductor cross-sections		
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
— solid or stranded	2x (0,75 2,5 mm²), 2x 4 mm²	
• for main contacts		
type of connectable conductor cross-sections		
arrangement of electrical connectors for main current circuit	Top and bottom	
for auxiliary and control circuit	screw-type terminals	
• for main current circuit	screw-type terminals	
type of electrical connection		
connections/ Terminals		
— forwards	0 mm	
— at the side	30 mm	
— backwards	0 mm	
— upwards	50 mm	
— downwards	50 mm	
• for live parts at 690 V		
— forwards	0 mm	
— at the side	30 mm	
— backwards	0 mm	
— upwards	50 mm	
— downwards	50 mm	
• for grounded parts at 690 V	· · · · · ·	
— at the side	9 mm	
— upwards	30 mm	
for live parts at 500 V — downwards	30 mm	
— at the side	9 mm	
— upwards	30 mm	
— downwards	30 mm	
 for grounded parts at 500 V 		

Test Certificates Marine / Shipping











Marine / Shipping

other

Railway



Confirmation



Vibration and Shock

Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1EA15-0BA0

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2011-1EA15-0BA0}$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1EA15-0BA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-1EA15-0BA0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1EA15-0BA0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-1EA15-0BA0&objecttype=14&gridview=view1

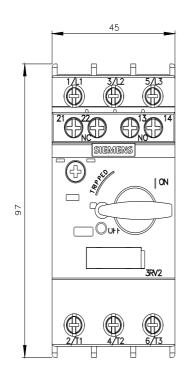

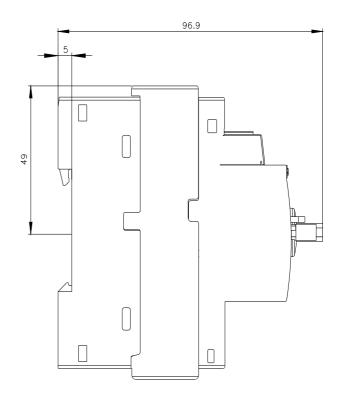

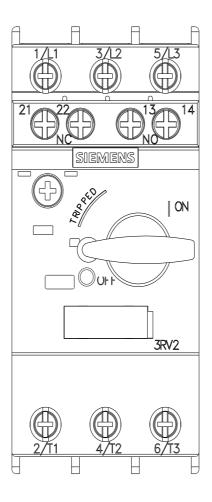

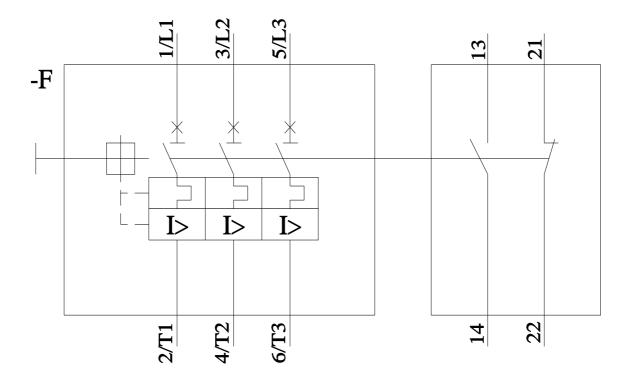

last modified: 11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV20111EA150BA0