# SIEMENS

#### Data sheet

### 3RV2011-1EA25



Circuit breaker size S00 for motor protection, CLASS 10 A-release 2.8...4 A N release 52 A Spring-type terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC  $\,$ 

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	7.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000
electrical endurance (operating cycles) typical	100 000
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	2.8 4 A
operating voltage	
rated value	20 690 V
• at AC-3 rated value maximum	690 V
• at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	4 A
operational current	

a at AC 2 at 400 V rated value	
at AC-3 at 400 V rated value	4 A
at AC-3e at 400 V rated value	4 A
operating power	
• at AC-3	
— at 230 V rated value	0.8 kW
— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	3 kW
• at AC-3e	
— at 230 V rated value	0.8 kW
— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	3 kW
operating frequency	
<ul> <li>at AC-3 maximum</li> </ul>	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
design of the auxiliary switch	transverse
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	2 A
● at 120 V	0.5 A
• at 125 V	0.5 A
• at 230 V	0.5 A
operational current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 60 V	0.15 A
Protective and monitoring functions	
product function	
product function	No
ground fault detection	No
ground fault detection     phase failure detection	Yes
ground fault detection     phase failure detection     trip class	Yes CLASS 10
ground fault detection     phase failure detection     trip class     design of the overload release	Yes
ground fault detection     phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)	Yes CLASS 10 thermal
ground fault detection     phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value	Yes CLASS 10 thermal 100 kA
• ground fault detection     • phase failure detection      trip class      design of the overload release      maximum short-circuit current breaking capacity (Icu)          • at AC at 240 V rated value          • at AC at 400 V rated value	Yes CLASS 10 thermal 100 kA 100 kA
ground fault detection     phase failure detection     trip class  design of the overload release maximum short-circuit current breaking capacity (Icu)     e at AC at 240 V rated value     e at AC at 400 V rated value     e at AC at 500 V rated value	Yes CLASS 10 thermal 100 kA 100 kA 100 kA
ground fault detection     phase failure detection      trip class      design of the overload release      maximum short-circuit current breaking capacity (Icu)          e at AC at 240 V rated value          e at AC at 400 V rated value          e at AC at 500 V rated value          e at AC at 690 V rated value      } }	Yes CLASS 10 thermal 100 kA 100 kA
ground fault detection     phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value         e at AC at 500 V rated value         e at AC at 690 V rated value         e at AC at 690 V rated value	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA
ground fault detection     phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (lcu)         e at AC at 240 V rated value         e at AC at 400 V rated value         e at AC at 500 V rated value         e at AC at 690 V rated value         e at AC at 690 V rated value         e at AC at 240 V rated value         e at AC at 690 V rated value         e at AC at 240 V rated value         e at AC at 690 V rated value         e at 240 V rated value	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA
ground fault detection     phase failure detection     trip class  design of the overload release maximum short-circuit current breaking capacity (Icu)     e at AC at 240 V rated value     e at AC at 400 V rated value     e at AC at 500 V rated value     e at AC at 690 V rated value     operating short-circuit current breaking capacity (Ics) at AC     e at 240 V rated value     e at 400 V rated value	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 100 kA
<ul> <li>ground fault detection</li> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 500 V rated value</li> </ul>	Yes CLASS 10 thermal 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA
<ul> <li>ground fault detection</li> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 690 V rated value</li> <li>at 690 V rated value</li> <li>at 500 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul>	Yes CLASS 10 thermal 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 100 kA 4 kA
ground fault detection     phase failure detection      trip class      design of the overload release      maximum short-circuit current breaking capacity (Icu)          at AC at 240 V rated value          at AC at 400 V rated value          at AC at 500 V rated value          at AC at 690 V rated value          operating short-circuit current breaking capacity (Ics) at AC          at 240 V rated value          at 400 V rated value          at 690 V rated value          at 690 V rated value          at 690 V rated value          bat 690 V rated value	Yes CLASS 10 thermal 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA
ground fault detection     phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value         e at AC at 500 V rated value         e at AC at 690 V rated value         e at AC at 690 V rated value         e at 240 V rated value         e at 240 V rated value         e at 690 V rated value         e at 400 V rated value         e at 690 V rated value         e at 690 V rated value	Yes CLASS 10 thermal 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 100 kA 4 kA
ground fault detection     phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value         e at AC at 500 V rated value         e at AC at 690 V rated value         e at AC at 690 V rated value         e at 240 V rated value         e at 240 V rated value         e at AC at 690 V rated value         e at AC at 690 V rated value         e at 240 V rated value         e at 400 V rated value         e at 400 V rated value         e at 400 V rated value         e at 690 V rated value         e a	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 52 A
<ul> <li>ground fault detection         <ul> <li>phase failure detection</li> </ul> </li> <li>trip class         <ul> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)</li> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 690 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 690 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 52 A
<ul> <li>ground fault detection</li> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 52 A
<ul> <li>ground fault detection <ul> <li>phase failure detection</li> </ul> </li> <li>trip class <ul> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul></li></ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 52 A
<ul> <li>ground fault detection</li> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 52 A
<ul> <li>ground fault detection <ul> <li>phase failure detection</li> </ul> </li> <li>trip class <ul> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul></li></ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 52 A
<ul> <li>ground fault detection <ul> <li>phase failure detection</li> </ul> </li> <li>trip class <ul> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul> </li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul></li></ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 100 kA 52 A
<ul> <li>ground fault detection</li> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 52 A 4 A 4 A 0.13 hp
<ul> <li>ground fault detection</li> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (lcu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (lcs) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 52 A 4 A 4 A 0.13 hp
<ul> <li>ground fault detection</li> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>by ielded mechanical performance [hp]</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>by or ated value</li> <li>c for 3-phase AC motor</li> </ul> </li> </ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 4 kA 52 A 4 A 4 A 4 A
<ul> <li>ground fault detection</li> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 100 kA 52 A 4 A 4 A 4 A 0.13 hp 0.33 hp 0.8 hp
<ul> <li>ground fault detection</li> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> </li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 200 V rated value</li> <li>at 200 V rated value</li> <li>at 200/208 V rated value</li> <li>at 220/230 V rated value</li> </ul></li></ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 100 kA 4 kA 52 A 4 A 4 A 4 A 0.13 hp 0.33 hp 0.75 hp
<ul> <li>ground fault detection</li> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>for single-phase AC motor <ul> <li>at 110/120 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> <li>at 400/480 V rated value</li> </ul> </li> </ul>	Yes CLASS 10 thermal 100 kA 100 kA 100 kA 6 kA 100 kA 100 kA 100 kA 100 kA 4 kA 52 A 4 A 4 A 4 A 0.13 hp 0.33 hp 0.8 hp 0.75 hp 2 hp

Short-circuit protection				
product function short circuit protection	Yes			
design of the short-circuit trip	magnetic			
design of the fuse link				
for short-circuit protection of the auxiliary switch required	Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A)			
design of the fuse link for IT network for short-circuit protection of the main circuit				
• at 400 V	gL/gG 32 A			
• at 500 V	gL/gG 32 A			
• at 690 V	gL/gG 25 A			
Installation/ mounting/ dimensions				
mounting position	any			
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715			
height	106 mm			
width	45 mm			
depth	97 mm			
required spacing				
with side-by-side mounting at the side	0 mm			
• for grounded parts at 400 V				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
● for live parts at 400 V				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
<ul> <li>for grounded parts at 500 V</li> </ul>				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
<ul> <li>for live parts at 500 V</li> </ul>				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
<ul> <li>for grounded parts at 690 V</li> </ul>				
— downwards	50 mm			
— upwards	50 mm			
— backwards	0 mm			
— at the side	30 mm			
— forwards	0 mm			
• for live parts at 690 V				
— downwards	50 mm			
— upwards	50 mm			
— backwards	0 mm			
— at the side	30 mm			
— forwards	0 mm			
Connections/ Terminals				
type of electrical connection				
<ul> <li>for main current circuit</li> </ul>	spring-loaded terminals			
<ul> <li>for auxiliary and control circuit</li> </ul>	spring-loaded terminals			
arrangement of electrical connectors for main current circuit	Top and bottom			
type of connectable conductor cross-sections				
for main contacts				
— solid or stranded	2x (0,5 4 mm²)			
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 2.5 mm <sup>2</sup> )			
— finely stranded without core end processing	2x (0.5 2.5 mm <sup>2</sup> )			
for AWG cables for main contacts	2x (20 12)			
type of connectable conductor cross-sections				
for auxiliary contacts				

— solid or stra	nded	2x (0	).5 2.5 mm²)				
- finely strand	ded with core end proces	sing 2x (0	2x (0.5 1.5 mm <sup>2</sup> )				
- finely strand	ded without core end proc	cessing 2x (0	2x (0.5 1.5 mm <sup>2</sup> )				
<ul> <li>for AWG cables f</li> </ul>	for AWG cables for auxiliary contacts			2x (20 14)			
design of screwdriver	design of screwdriver shaft		Diameter 3 mm				
size of the screwdrive		3,0 x	3.0 x 0.5 mm				
Safety related data	·						
B10 value							
<ul> <li>with high demand</li> </ul>	with high demand rate according to SN 31920			5 000			
	proportion of dangerous failures						
with low demand	rate according to SN 319	920 50 %	50 %				
<ul> <li>with high demand</li> </ul>	d rate according to SN 31	920 50 %	)				
failure rate [FIT]							
	with low demand rate according to SN 31920		IT				
	T1 value for proof test interval or service life according to IEC		10 a				
protection class IP on	the front according to	IEC 60529 IP20					
touch protection on th	e front according to IE	C 60529 finge	r-safe, for vertical contact	from the front			
display version for swite	ching status	Hand	Handle				
Certificates/ approvals							
General Product App	roval				For use in hazard- ous locations		
<u>Confirmation</u>			<u>KC</u>	EHC	K ATEX		
For use in hazard- ous locations	Declaration of Confo	rmity	Test Certificates		Marine / Shipping		
IECEx	CE EG-Konf.	UK CA	Type Test Certific- ates/Test Report	Special Test Certific- ate	ABS		
Marine / Shipping					other		
BUREAU VERITAS		Lloyds Register	PRS	RINA	<u>Confirmation</u>		
other	Railway						
	Confirmation	Vibration and Shock					

**Further information** 

Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1EA25 Cax online generator

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1EA2


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2011-1EA25&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1EA25/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-1EA25&objecttype=14&gridview=view1

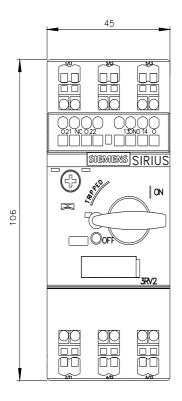

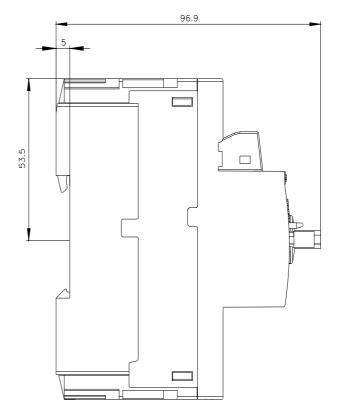

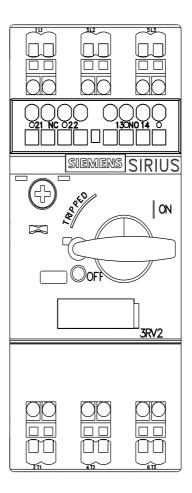

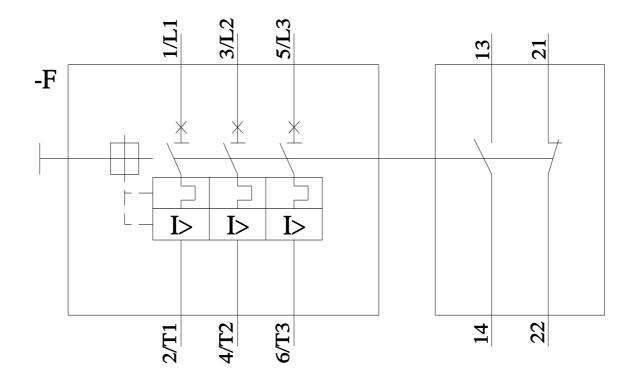

11/21/2022 🖸

8/17/2023

Subject to change without notice © Copyright Siemens

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RV20111EA25