SIEMENS

Data sheet

3RV2011-1FA10-0BA0



Special type Circuit breaker size S00 for motor protection, CLASS 10 A-release 3.5...5 A N release 65 A screw terminal Standard switching capacity Ambient temperature -50 $^\circ$ C 500 switching cycles

<u>6/73</u>	
product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	7.25 W
 at AC in hot operating state per pole 	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	500
 of auxiliary contacts typical 	500
electrical endurance (operating cycles) typical	500
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-50 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	3.5 5 A
operating voltage	
rated value	20 690 V
 at AC-3 rated value maximum 	690 V
operating frequency rated value	50 60 Hz
operational current rated value	5 A

operational current	
at AC-3 at 400 V rated value	5 A
operating power	
• at AC-3	
— at 230 V rated value	1.1 kW
— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	4 kW
operating frequency	
• at AC-3 maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	Yes
trip class	CLASS 10
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	
at AC at 240 V rated value	100 kA
• at AC at 240 V rated value	100 kA
	100 kA
at AC at 500 V rated value	100 KA 6 KA
• at AC at 690 V rated value	0 KA
operating short-circuit current breaking capacity (Ics) at AC	
 at 240 V rated value 	100 kA
	100.1.1
• at 400 V rated value	100 kA
• at 500 V rated value	100 KA
at 500 V rated valueat 690 V rated value	100 kA 4 kA
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit 	100 KA
at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection	100 kA 4 kA 65 A
at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection	100 kA 4 kA 65 A Yes
at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip	100 kA 4 kA 65 A
at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection	100 kA 4 kA 65 A Yes
at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit	100 kA 4 kA 65 A Yes
at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	100 kA 4 kA 65 A Yes magnetic
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V 	100 kA 4 kA 65 A Yes magnetic gG 32 A
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A
at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A gG 32 A gG 25 A
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V - downwards 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V upwards upwards 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V at 600 V 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V at the side or downwards at the side for live parts at 400 V 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 9 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V at the side for live parts at 400 V at the side for live parts at 400 V at 400 V 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V at the side for live parts at 400 V at the side for live parts at 400 V at the side at the side for grounded parts at 500 V 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 9 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V at the side for live parts at 400 V at the side at the side for grounded parts at 500 V at the side for grounded parts at 500 V 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V at the side for live parts at 400 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V at the side for live parts at 400 V at the side for ilve parts at 400 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit Short-circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing with side-by-side mounting at the side for grounded parts at 400 V at the side for live parts at 400 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side for grounded parts at 500 V at the side 	100 kA 4 kA 65 A Yes magnetic gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm

— upwards	— upwards			30 mm			
— at the side		9 n	ım				
 for grounded part 							
— downwards	S		mm				
— upwards		50	mm				
— backwards		0 n	ım				
— at the side		30	mm				
— forwards		0 n	ım				
 for live parts at 6 	690 V						
- downwards	S	50	mm				
— upwards		50	50 mm				
— backwards		0 n	0 mm				
— at the side		30	30 mm				
— forwards		0 n	0 mm				
Connections/ Terminal	S						
type of electrical con							
for main current		scr	ew-type terminals				
			and bottom				
circuit	arrangement of electrical connectors for main current circuit						
	conductor cross-sections						
 for main contact 							
— solid or stra		2x	(0,75 2,5 mm²), 2x 4 m	m²			
	 — solid of stranded — finely stranded with core end processing 						
tightening torque	aca with core cha processi	19 21	(0.5 1.5 mm²), 2x (0.75	2.3 mm)			
	s with scrow type terminals	0.9	1.2 N.m				
	for main contacts with screw-type terminals design of screwdriver shaft			0.8 1.2 N·m			
			Diameter 5 to 6 mm				
size of the screwdrive	-	P0.	zidriv size 2				
design of the thread of the connection screw							
for main contact	S	M3					
IEC 61508							
T1 value							
 for proof test interval or service life according to IEC 61508 		g to IEC 10	10 a				
Electrical Safety		C 60520	1020				
protection class IP on the front according to IEC 60529			IP20				
touch protection on the front according to IEC 60529		60529 IIN(finger-safe, for vertical contact from the front				
Display							
display version for swit	ching status	На	ndle				
Approvals Certificates							
General Product App	oroval				Test Certificates		
Confirmation	"	UK CA	<u>KC</u>	гпг	Special Test Certific- ate		
	CE	20		EHC			
	EG-Konf.	ĽН		LIIL			
Test Certificates	Marine / Shipping						
Type Test Certific-	and the second sec	Sec. 1	¥ &	11	(And a state of the state of th		
ates/Test Report		e Xe B	ተ መ	Register	(28)		
	ADS		DNV	UIS			
	ABS	BUREAU VERITAS	DNV	0.9	PRO		
Maning (Obi	other			Deiluses			
Marine / Shipping	other			Railway			
(Ta)	Miscellancous	Confirmation	^	Special Test Cortific	Confirmation		
	<u>Miscellaneous</u>	Confirmation		Special Test Certific- ate	Confirmation		
			<u> </u>	<u></u>			
5 B A Z							
RINA			VDE				
RINA			VDE				

Environment



Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1FA10-0BA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-1FA10-0BA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1FA10-0BA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-1FA10-0BA0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1FA10-0BA0/char


Further characteristics (e.g. electrical endurance, switching frequency)

arch&mlfb=3RV2011-1FA10-0BA0&objecttype=14&gridview=view1 http://www.automation.siemens.com/bilddb/index.aspx?view=S

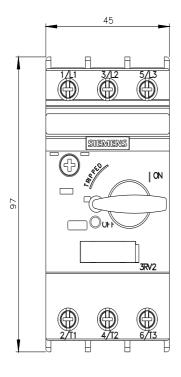

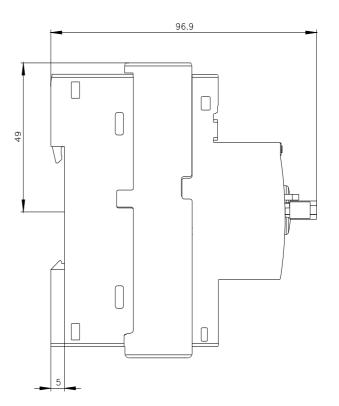

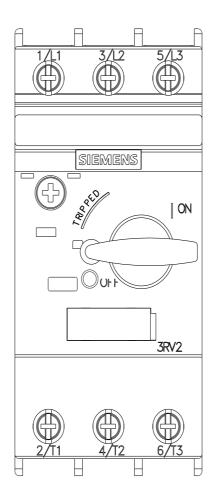

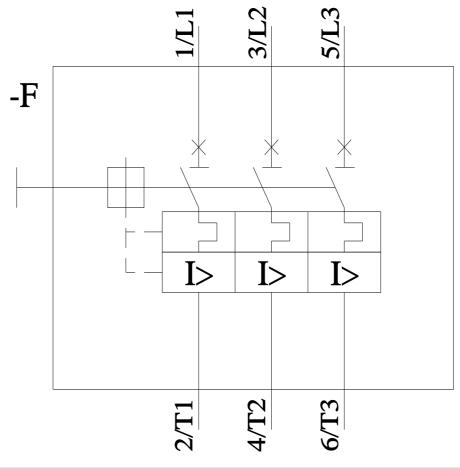

4/12/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV20111FA100BA0