## **SIEMENS**

product brand name

Data sheet 3RV2011-1GA40

SIRIUS





Circuit breaker size S00 for motor protection, CLASS 10 A-release 4.5...6.3 A N-release 82 A ring cable lug connection Standard switching capacity



product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	7.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
of auxiliary contacts typical	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	4.5 6.3 A
operating voltage	
rated value	20 690 V
• at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz

Section   Current	operational current rated value	63 /
### AG-3 at 400 V ratio value	operational current rated value	6.3 A
# at AC-3e at 400 V rated value  - at AC-30 V rated value  - at AC-30 V rated value  - at 500 V rated value  - at 600 V rated	-	6.2.4
Part		
* all AC-3		6.3 A
at 400 V rated value		45100
at 500 V rated value		
at 800 V rated value		
at 230 V rated value		4 KVV
		4-111
— at 809 V rated value		
operating frequency  • al AC-3 maximum  • al AC-3 maximum  15 1/h  • al AC-3 maximum  15 1/h  Auxillary circuit  number of NC contacts for auxillary contacts  number of NC contacts for auxillary contacts  number of NC contacts for auxillary contacts  number of CO contacts for auxillary contacts  Protective and molitoring functions  product function  • ground fault detection  • pround fault detection  • provide the overload release  design of the overload release  maximum short-circuit current breaking capacity (icu)  • al AC at 240 V rated value  • al AC at 250 V rated value  • al AC at 550 V rated value  • al 600 V rated value		
eat AC-3 maximum		4 kW
Auxillary circuit number of NC contacts for auxillary contacts 0 number of NC contacts for auxillary contacts 0 number of NC contacts for auxillary contacts 0 product function ground fault detection Yes trip class CLASS 10 design of the overload release maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at 400 V rated value • at 500 V rated value • at 400 V rated value • at 500 V rated value • at 600 V rated value • at 800 V rated value • 50 S p  - at 200208 V rated value • 15 pp  - at 200208 V rated value • at 575600 V rated value • 5 pp  Short-circuit protection  product function short circuit protection • 4000 V  at 5000 V  at 500 V  at 5000 V  at 5		
number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0 number of CO contacts for auxiliary contacts 0 product function • ground fault detection • product function • and Control of the vertical function of the product function • and Control of the vertical function of the product function • at AC at 500 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at 600 V rated va		15 1/h
number of NO contacts for auxiliary contacts		
Protect Verve and monitoring functions  Product function  ground fault detection  phase failure detection  phase failure detection  class CLASS 10  design of the overload release  thermal  maximum short-circuit current breaking capacity (Icu)  at AC at 240 V rated value  at AC at 500 V rated value  at AC at 500 V rated value  poperating short-circuit current breaking capacity (Ics) at AC  at 240 V rated value  poperating short-circuit current breaking capacity (Ics) at AC  at 240 V rated value  poperating short-circuit current breaking capacity (Ics) at AC  at 240 V rated value  poperating short-circuit current breaking capacity (Ics) at AC  at 240 V rated value  poperating short-circuit current breaking capacity (Ics) at AC  at 240 V rated value  poperating short-circuit for short-circuit trip unit  at 500 V rated value  poperating short-circuit current breaking capacity (Ics) at AC  at 500 V rated value  poperating short-circuit short-circuit trip unit  at 500 V rated value  poperating short-circuit short-c		
Protective and monitoring functions product function • ground fault detection • product function • phase failure detection • phase failure detection  trip class  CLASS 10  design of the overload release  maximum short-circuit current breaking capacity (tcu) • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at AC at 400 V rated value • at 800 V rated value • for 3-phase AC motor  — at 110/120 V rated value • for 3-phase AC motor  — at 200/208 V rated value • for 3-phase AC motor  — at 200/208 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated value • for 3-phase AC motor  — at 200/200 V rated		
product function  ground fault detection  phase failure detection  phase failure detection  phase failure detection  Pes  CLASS 10  themal  maximum short-circuit current breaking capacity ((cu)  at AC at 240 V rated value  at AC at 240 V rated value  at AC at 5500 V rated value  at AC at 5500 V rated value  at AC at 690 V rated value  at 600 V rated value  at 500 V rated value  at 500 V rated value  at 500 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  at 600 V rated value  bin 600 V rated value  at 600 V rated value  at 600 V rated value  bin 600 V rated value  at 6	·	0
	Protective and monitoring functions	
	product function	
trip class  design of the overload release  maximum short-circuit current breaking capacity (Icu)  • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at 240 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 800 V rated value • at 800 V rated value • 6.3 A  ULCSA ratings  full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • 6.3 A  yielded mechanical performance [hp] • for single-phase AC motor • at 110/120 V rated value • for 3-phase AC motor • at 200/208 V rated value • 1.5 hp • at 200/208 V rated value • 1.5 hp • at 200/208 V rated value • 1.5 hp • at 46049 V rated value • 1.5 hp • at 46049 V rated value • 3 hp • at 575/600 V rated value • 3 hp  Product function short circuit protection  product function short circuit trip  design of the fuse link for T network for short-circuit trip et 400 V • at 500 V • at 500 V • at 600 V	<ul> <li>ground fault detection</li> </ul>	No
design of the overload release	phase failure detection	Yes
maximum short-circuit current breaking capacity (Icu)	trip class	CLASS 10
	design of the overload release	thermal
	maximum short-circuit current breaking capacity (Icu)	
	<ul> <li>at AC at 240 V rated value</li> </ul>	100 kA
at AC at 690 V rated value  operating short-circuit current breaking capacity (Ics) at AC  at 240 V rated value  at 400 V rated value  100 kA  at 690 V rated value  100 kA  at 690 V rated value  4 kA  response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  at 480 V rated value  6.3 A  at 690 V rated value  6.3 A  yielded mechanical performance [hp]  for single-phase AC motor  — at 110/120 V rated value  5 hp  at 230 V rated value  0.5 hp  for 3-phase AC motor  — at 220/230 V rated value  1 hp  — at 220/230 V rated value  1 hp  — at 220/230 V rated value  3 hp  — at 460/480 V rated value  3 hp  — at 6576/600 V rated value  5 hp  Short-circuit protection  product function short circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  at 400 V  at 690 V  gL/gG 50 A  at 690 V  gL/gG 40 A  at 690 V	<ul> <li>at AC at 400 V rated value</li> </ul>	100 kA
operating short-circuit current breaking capacity (Ics) at AC  • at 240 V rated value • at 400 V rated value • at 500 V rated value • at 500 V rated value • at 690 V rated value  • at 480 V rated value • at 480 V rated value • at 600 V rated value • at 110/120 V rated value • or 3-phase AC motor • at 230 V rated value • for 3-phase AC motor • at 200/208 V rated value • for 3-phase AC motor • at 200/208 V rated value • for 3-phase AC motor • at 200/208 V rated value • for 3-phase AC motor • at 260/200 V rated value • for 3-phase AC motor • at 250/200 V rated value • for 3-phase AC motor • at 260/200 V rated value • for 3-phase AC motor • at 260/200 V rated value • for 3-phase AC motor • at 260/200 V rated value • for 3-phase AC motor • at 480/480 V rated value • for 3-phase AC motor • at 260/200 V rated value • for 3-phase AC motor • at 480/480 V rated value • for 3-phase AC motor • at 480/480 V rated value • for 3-phase AC motor • for 4-phase AC motor	<ul> <li>at AC at 500 V rated value</li> </ul>	100 kA
	at AC at 690 V rated value	6 kA
at 400 V rated value at 500 V rated value at 600 V rated value 4 KA response value current of instantaneous short-circuit trip unit 82 A  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value 6.3 A at 600 V rated value 6.3 A  yielded mechanical performance [hp]  of or single-phase AC motor — at 110/120 V rated value 0.5 hp  of or 3-phase AC motor — at 220 V rated value 1.5 hp  at 220/230 V rated value 1.5 hp — at 220/230 V rated value 3 hp — at 460/480 V rated value 3 hp — at 575/600 V rated value 5 hp  Short-circuit protection  product function short circuit protection  design of the fuse link for IT network for short-circuit protection of the main circuit  at 400 V at 600 V at 600 V gL/gG 50 A at 600 V gL/gG 40 A gL/gG 35 A	operating short-circuit current breaking capacity (Ics) at AC	
at 500 V rated value at 690 V rated value 4 kA response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value 6.3 A at 600 V rated value 6.3 A  yielded mechanical performance [hp]  of or single-phase AC motor — at 110/120 V rated value 0.25 hp — at 230 V rated value 0.5 hp  of 3-phase AC motor — at 220/208 V rated value 1 hp — at 220/230 V rated value 1 1.5 hp — at 460/480 V rated value 3 hp — at 575/600 V rated value 5 hort-circuit protection  product function short circuit protection  design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V of at 500 V of at 600 V	• at 240 V rated value	100 kA
■ at 690 V rated value     response value current of instantaneous short-circuit trip unit     82 A  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor     ■ at 480 V rated value     ■ at 600 V rated value     ■ at 600 V rated value     ■ for single-phase AC motor     — at 110/120 V rated value     ■ of single-phase AC motor     — at 230 V rated value     ■ of or 3-phase AC motor     — at 200/208 V rated value     ■ for 3-phase AC motor     — at 220/230 V rated value     □ at 220/230 V rated value     □ at 660 V rated value     □ at 675/600 V rated value     □ at 675/600 V rated value     □ at 675/600 V rated value     □ at 460/480 V rated value     □ at 460	at 400 V rated value	100 kA
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value • at 600 V rated value • for single-phase AC motor  — at 110/120 V rated value • for 3-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value 1 hp — at 220/230 V rated value 1 s hp — at 460/480 V rated value 3 hp — at 575/600 V rated value 5 hp  Short-circuit protection  product function short circuit protection  general design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 500 V • at 500 V • at 500 V • at 690 V	• at 500 V rated value	100 kA
### Company of the short-circuit protection  #### UII-load current (FLA) for 3-phase AC motor  ### at 480 V rated value  ### at 280 V rated value  ### at 480 V vated value  ### at 480 V rated value  ### at 480 V rated value  ### bip  ### at 480 V rated value  ### bip  ### short-circuit protection  ### protection short circuit protection  ### design of the short-circuit trip  ### design of the fuse link for IT network for short-circuit protection of the main circuit  ### at 400 V  ###	at 690 V rated value	4 kA
full-load current (FLA) for 3-phase AC motor       6.3 A         ● at 800 V rated value       6.3 A         yielded mechanical performance [hp]       6.3 A         • for single-phase AC motor       - at 110/120 V rated value       0.25 hp         — at 230 V rated value       0.5 hp         • for 3-phase AC motor       - at 200/208 V rated value       1 hp         — at 220/230 V rated value       1.5 hp         — at 460/480 V rated value       3 hp         — at 575/600 V rated value       5 hp         Short-circuit protection         product function short circuit protection       Yes         design of the short-circuit trip       magnetic         design of the fuse link for IT network for short-circuit protection of the main circuit       at 400 V         • at 400 V       gL/gG 50 A         • at 500 V       gL/gG 40 A         • at 690 V       gL/gG 35 A	response value current of instantaneous short-circuit trip unit	82 A
■ at 480 V rated value     ■ at 600 V rated value     ■ 6.3 A  yielded mechanical performance [hp]      ● for single-phase AC motor     — at 110/120 V rated value     — at 230 V rated value     ● for 3-phase AC motor     — at 200/208 V rated value     — at 2200/230 V rated value     — at 2200/230 V rated value     — at 460/480 V rated value     — at 575/600 V rated value     — at 575/600 V rated value     — bhp     — at 575/600 V rated value     — at 575/600 V rated value     — at 460/480 V rated value     — at 575/600 V rated value     — at 575/600 V rated value     ■ at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit      ● at 400 V     ● at 500 V     ● at 500 V     ● at 690 V	UL/CSA ratings	
at 600 V rated value      yielded mechanical performance [hp]	full-load current (FLA) for 3-phase AC motor	
yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value — at 230 V rated value 9.5 hp  • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value  product function short circuit protection  product function short circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V • at 500 V • at 500 V • at 690 V  gL/gG 50 A • at 690 V	• at 480 V rated value	6.3 A
for single-phase AC motor         — at 110/120 V rated value         — at 230 V rated value         — at 230 V rated value         • for 3-phase AC motor         — at 200/208 V rated value         — at 220/230 V rated value         — at 220/230 V rated value         — at 460/480 V rated value         — at 575/600 V rated value         — at 575/600 V rated value         — by the formula of the short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit          • at 400 V         • at 500 V         • at 690 V          • at 690 V	at 600 V rated value	6.3 A
— at 110/120 V rated value 0.25 hp — at 230 V rated value 0.5 hp  • for 3-phase AC motor — at 200/208 V rated value 1 hp — at 220/230 V rated value 1.5 hp — at 460/480 V rated value 3 hp — at 575/600 V rated value 5 hp  Short-circuit protection  product function short circuit protection Yes design of the short-circuit trip magnetic  design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 500 V • at 690 V  • at 690 V	yielded mechanical performance [hp]	
- at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  5 hp  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  0.5 hp  1 hp  2 hp  3 hp  5 hp  Short-circuit protection  Yes  design of the short-circuit trip  magnetic	• for single-phase AC motor	
for 3-phase AC motor         — at 200/208 V rated value         — at 220/230 V rated value         — at 460/480 V rated value         — at 575/600 V rated value         — at 575/600 V rated value          Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit          • at 400 V         • at 500 V         • at 690 V          • at 690 V	— at 110/120 V rated value	0.25 hp
- at 200/208 V rated value 1.5 hp - at 220/230 V rated value 3.5 hp - at 460/480 V rated value 5 hp  Short-circuit protection  product function short circuit protection Yes  design of the short-circuit trip magnetic  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V • at 500 V • at 500 V • at 690 V  gL/gG 35 A	— at 230 V rated value	0.5 hp
- at 220/230 V rated value - at 460/480 V rated value 3 hp - at 575/600 V rated value 5 hp  Short-circuit protection  product function short circuit protection  design of the short-circuit trip magnetic  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V • at 500 V • at 500 V • at 690 V  gL/gG 35 A	• for 3-phase AC motor	
- at 460/480 V rated value 3 hp - at 575/600 V rated value 5 hp  Short-circuit protection  product function short circuit protection Yes  design of the short-circuit trip magnetic  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V • at 500 V • at 500 V • at 690 V  gL/gG 35 A	— at 200/208 V rated value	1 hp
— at 575/600 V rated value 5 hp  Short-circuit protection  product function short circuit protection Yes  design of the short-circuit trip magnetic  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V gL/gG 50 A  • at 500 V gL/gG 40 A  • at 690 V gL/gG 35 A	— at 220/230 V rated value	1.5 hp
product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  gL/gG 35 A	— at 460/480 V rated value	3 hp
product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  gL/gG 35 A	— at 575/600 V rated value	5 hp
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  gL/gG 35 A	Short-circuit protection	
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  gL/gG 35 A	product function short circuit protection	Yes
design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  gL/gG 35 A		magnetic
• at 500 V gL/gG 40 A • at 690 V gL/gG 35 A	design of the fuse link for IT network for short-circuit	
• at 690 V gL/gG 35 A	• at 400 V	gL/gG 50 A
	• at 500 V	gL/gG 40 A
Installation/ mounting/ dimensions	• at 690 V	gL/gG 35 A
	Installation/ mounting/ dimensions	

mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	97 mm
width	45 mm
depth	97 mm
required spacing	
with side-by-side mounting at the side	0 mm
• for grounded parts at 400 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 400 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for grounded parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for grounded parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	Ring cable lug connection
for auxiliary and control circuit	ring terminal lug connection
arrangement of electrical connectors for main current circuit	Top and bottom
tightening torque	
for main contacts for ring cable lug	0.8 1.2 N·m
for auxiliary contacts for ring cable lug	1.2 0.8 N·m
outer diameter of the usable ring cable lug maximum	7.5 mm
design of screwdriver shaft	Diameter 5 to 6 mm
size of the screwdriver tip	size 2 and Pozidriv 2
design of the thread of the connection screw	
• for main contacts	M3
of the auxiliary and control contacts	M3
Safety related data	
product function suitable for safety function	Yes
suitability for use	N.
safety-related switching on	No
safety-related switching OFF	Yes
service life maximum	10 a
test wear-related service life necessary	Yes
proportion of dangerous failures	40.0
with low demand rate according to SN 31920	40 %
with high demand rate according to SN 31920	50 %
B10 value with high demand rate according to SN 31920	5 000

failure rate [FIT] with low demand rate according to SN 31920	50 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
T1 value	
<ul> <li>for proof test interval or service life according to IEC 61508</li> </ul>	10 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00
Display	
display version for switching status	Handle
Approvals Certificates	

## General Product Approval







Confirmation



<u>KC</u>

General Product Approval

For use in hazardous locations

**Test Certificates** 

Marine / Shipping







Special Test Certificate

Type Test Certificates/Test Report



Marine / Shipping











**Miscellaneous** 

other

other Railway

Confirmation



Special Test Certificate

Confirmation



**Environment** 

Siemens EcoTech



**Environment** 

Environmental Confirmations

## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

 $Information-\ and\ Download center\ (Catalogs,\ Brochures,...)$ 

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1GA40

Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2011-1GA40}\\$ 


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) <a href="https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1GA40">https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1GA40</a>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1GA40/char

Further characteristics (e.g. electrical endurance, switching frequency)
<a href="http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-1GA40&objecttype=14&gridview=view1">http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-1GA40&objecttype=14&gridview=view1</a>

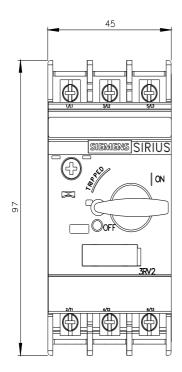

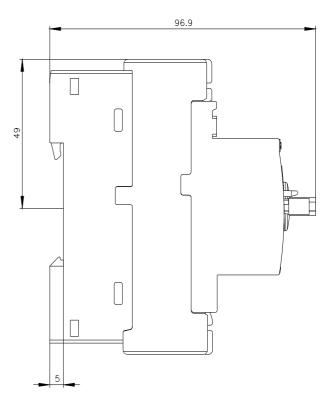

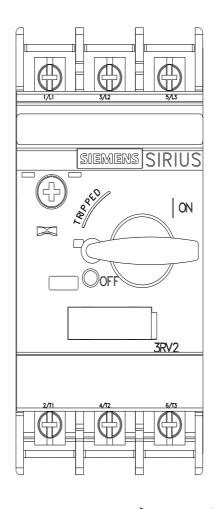

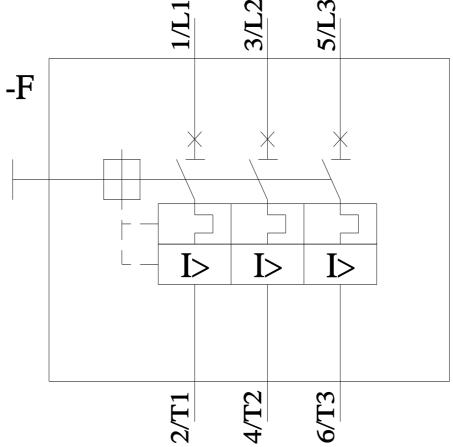

last modified: 4/12/2024 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV20111GA40