## SIEMENS

## Data sheet

## 3RV2011-4AA15



Circuit breaker size S00 for motor protection, CLASS 10 A-release 10...16 A N-release 208 A screw terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC

4/12 6/15	
product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	9.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	3.1 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
during storage	-50 +80 °C
<ul> <li>during transport</li> </ul>	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	10 16 A
operating voltage	
rated value	20 690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz

	-
operational current rated value	16 A
operational current	
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	16 A
<ul> <li>at AC-3e at 400 V rated value</li> </ul>	16 A
operating power	
• at AC-3	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	11 kW
• at AC-3e	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	11 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
design of the auxiliary switch	transverse
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	2 A
• at 120 V	0.5 A
• at 125 V	0.5 A
• at 230 V	0.5 A
operational current of auxiliary contacts at DC-13	
• at 24 V	1A
• at 60 V	0.15 A
Protective and monitoring functions	
product function	
<ul> <li>ground fault detection</li> </ul>	No
phase failure detection	Yes
trip class	CLASS 10
trip class design of the overload release	thermal
·	
design of the overload release	
design of the overload release maximum short-circuit current breaking capacity (Icu)	thermal
design of the overload release maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value	thermal 100 kA
design of the overload release maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V rated value	thermal 100 kA 55 kA
design of the overload release maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 500 V rated value	thermal 100 kA 55 kA 10 kA
design of the overload release maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at AC at 690 V rated value	thermal 100 kA 55 kA 10 kA
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value	thermal 100 kA 55 kA 10 kA 4 kA
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at 240 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 400 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 240 V rated value         • at 400 V rated value         • at 400 V rated value         • at 500 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 240 V rated value         • at 500 V rated value         • at 690 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 500 V rated value         • at 500 V rated value         • at 690 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         response value current of instantaneous short-circuit trip unit         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 500 V rated value         • at 500 V rated value         • at 690 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 240 V rated value         • at 500 V rated value         • at 690 V rated value         response value current of instantaneous short-circuit trip unit         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 240 V rated value         • at 240 V rated value         • at 500 V rated value         • at 500 V rated value         • at 690 V rated value         • at 480 V rated value         • at 600 V rated value         • at 600 V rated value         • at 600 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 240 V rated value         • at 400 V rated value         • at 690 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A 16 A 16 A
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 240 V rated value         • at 240 V rated value         • at 500 V rated value         • at 500 V rated value         • at 690 V rated value         response value current of instantaneous short-circuit trip unit         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         • at	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A 16 A 16 A 16 A 16 A
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 240 V rated value         • at 400 V rated value         • at 690 V rated value         • at 480 V rated value         • at 600 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A 16 A 16 A
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 240 V rated value         • at 240 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 480 V rated value         • at 480 V rated value         • at 600 V rated value         • at 600 V rated value         • at 600 V rated value         • at 110/120 V rated value         — at 230 V rated value         — at 230 V rated value         • for 3-phase AC motor <td>thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A 16 A 16 A 16 A 1 hp 2 hp</td>	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A 16 A 16 A 16 A 1 hp 2 hp
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 240 V rated value         • at 400 V rated value         • at 500 V rated value         • at 500 V rated value         • at 690 V rated value         • at 600 V rated value         • at 230 V rated value         • at 110/120 V rated value         - at 230 V rated value         • for 3-phase AC motor         - at 200/208 V rated value	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A 16 A 16 A 16 A 16 A 3 hp
design of the overload release         maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value         • at 240 V rated value         • at 240 V rated value         • at 240 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 480 V rated value         • at 480 V rated value         • at 600 V rated value         • at 600 V rated value         • at 600 V rated value         • at 110/120 V rated value         — at 230 V rated value         — at 230 V rated value         • for 3-phase AC motor <td>thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A 16 A 16 A 16 A 1 hp 2 hp</td>	thermal 100 kA 55 kA 10 kA 4 kA 100 kA 30 kA 5 kA 2 kA 208 A 16 A 16 A 16 A 1 hp 2 hp

contact rating of auxiliary contacts according to UL	C300 / R300
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link	
• for short-circuit protection of the auxiliary switch required	Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current Ik < 400 A)
design of the fuse link for IT network for short-circuit protection of the main circuit	
• at 240 V	gL/gG 80 A
• at 400 V	gL/gG 63 A
• at 500 V	gL/gG 50 A
• at 690 V	gL/gG 40 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	97 mm
width	45 mm
depth	97 mm
required spacing	
<ul> <li>with side-by-side mounting at the side</li> </ul>	0 mm
<ul> <li>for grounded parts at 400 V</li> </ul>	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
<ul> <li>for live parts at 400 V</li> </ul>	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
<ul> <li>for grounded parts at 500 V</li> </ul>	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
<ul> <li>for live parts at 500 V</li> </ul>	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
for grounded parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	50 mm
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side — forwards	30 mm 0 mm
Connections/ Terminals	
type of electrical connection	screw type terminals
for main current circuit     for auxiliany and control circuit	screw-type terminals
for auxiliary and control circuit arrangement of electrical connectors for main current circuit	screw-type terminals Top and bottom
type of connectable conductor cross-sections	
for main contacts	$0 \times (0.75 - 0.5 \text{ mm}^2)  0 \times 4 \text{ mm}^2$
— solid or stranded	2x (0,75 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>
— finely stranded with core end processing	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )
for AWG cables for main contacts	2x (18 14), 2x 12
type of connectable conductor cross-sections	

<ul> <li>for auxiliary contain</li> </ul>	acte							
-			$2x (0.5 \pm 1.5 \text{ mm}^2) 2x (0.75 \pm 2.5 \text{ mm}^2)$					
	<ul> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul>			2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )				
-	or auxiliary contacts	ig	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )					
			2x (20 16), 2x (18 14)					
tightening torque	with acrow type terminale		0.0 4.2 Mm					
	with screw-type terminals	- 1-	0.8 1.2 N·m					
· · · · ·	acts with screw-type termina	ais	0.8 1.2 N·m					
design of screwdriver			Diameter 5 to 6 mm					
size of the screwdrive	-		Pozidriv size 2					
	f the connection screw							
<ul> <li>for main contacts</li> </ul>			M3					
<ul> <li>of the auxiliary an</li> </ul>	nd control contacts		M3					
Safety related data								
product function suitable	e for safety function		Yes					
suitability for use								
<ul> <li>safety-related swi</li> </ul>	itching on		No	No				
<ul> <li>safety-related swi</li> </ul>	itching OFF		Yes					
service life maximum			10 a					
test wear-related servi	ce life necessary		Yes					
proportion of dangero	us failures							
<ul> <li>with low demand</li> </ul>	rate according to SN 3192	0	40 %					
<ul> <li>with high demand</li> </ul>	I rate according to SN 3192	20	50 %					
B10 value with high de	emand rate according to S	SN 31920	5 000					
	ow demand rate accordin	g to SN	50 FIT					
31920								
ISO 13849								
device type according			3					
-	ording to ISO 13849-2 ne	cessary	Yes					
IEC 61508								
safety device type acc	ording to IEC 61508-2		Туре А					
T1 value								
<ul> <li>for proof test interval or service life according to IEC</li> </ul>		10 a						
61508								
Electrical Safety			1020					
protection class IP on the front according to IEC 60529		IP20						
-	touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front					
Display								
display version for switc	ning status		Handle					
Approvals Certificates								
General Product Appr	oval							
			O a star star	-	KO			
()	UK	(m)	Confirmation	Ē	KC			
עכ	<b>Z</b> Ô	(m)		(VI)				
EG-Konf.	СН	ccc		UL				
General Product Ap-	For use in hazardous lo	ocations	Test Certificates		Marine / Shipping			
proval		Jeations	rest certificates		Marine / Shipping			
			T T 10 10		-			
гпг		<b>IECE</b> <sub>2</sub>	<u>Type Test Certific-</u> ates/Test Report	Special Test Certific- ate	( Server			
FAL	\c x/	iece.			in the second			
E11E	ATEX	IECEx			ABS			
Marine / Shipping					other			
10 VA				~	Mar - H			
	<u>Å</u> ئ	Llovd's	(A)		<u>Miscellaneous</u>			
	DMR	Register		(SE)				
BUREAU	DNV	LRS	PRS	RINA				
VERITAS								

other		Railway		Environment	
<u>Confirmation</u>	UDE VDE	Special Test Certific- ate	<u>Confirmation</u>	EPD	Siemens EcoTech
Environment					
Environmental Con- firmations					

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-4AA15

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-4AA15

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-4AA15


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2011-4AA15&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-4AA15/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-4AA15&objecttype=14&gridview=view1

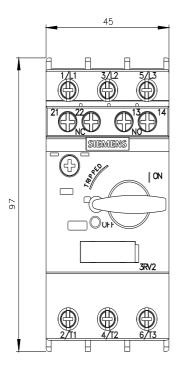

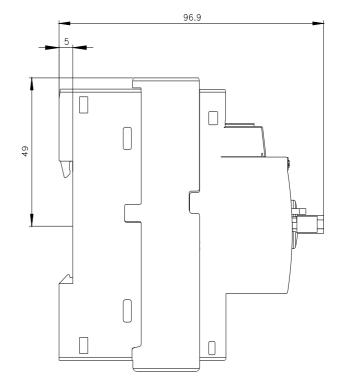

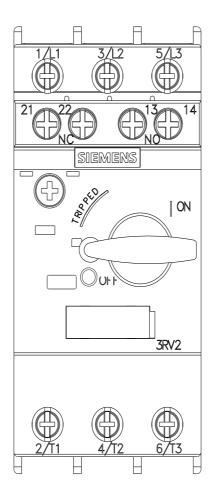

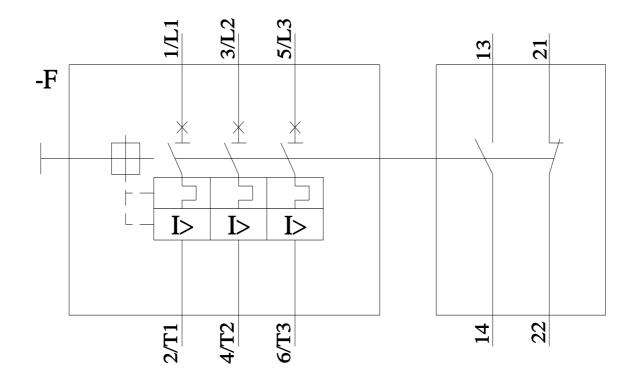

4/12/2024 🖸

5/6/2024

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV20114AA15