# SIEMENS

#### Data sheet

### 3RV2021-4FA10-0BA0



Special type Circuit breaker size S0 for motor protection, CLASS 10 A-release 34...40 A N-release 480 A screw terminal Standard switching capacity Ambient temperature -50  $^\circ$ C 500 switching cycles

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	SO
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	16.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	5.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	500
<ul> <li>of auxiliary contacts typical</li> </ul>	500
electrical endurance (operating cycles) typical	500
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-50 +40 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	34 40 A
operating voltage	
rated value	20 690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz
operational current rated value	40 A
operational current	
• at AC-3 at 400 V rated value	40 A
operating power	
• at AC-3	

- at 230 V rated value	11 kW
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
— at 690 V rated value	39 kW
operating frequency	
• at AC-3 maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	CLASS 10
trip class	thermal
design of the overload release maximum short-circuit current breaking capacity (Icu)	uleiniai
at AC at 240 V rated value	100 kA
at AC at 240 V rated value     at AC at 400 V rated value	20 kA
at AC at 500 V rated value	6 kA
at AC at 500 V rated value     at AC at 690 V rated value	3 kA
operating short-circuit current breaking capacity (Ics) at AC	
• at 240 V rated value	100 kA
at 200 V rated value	10 kA
at 500 V rated value	3 kA
at 690 V rated value	2 kA
response value current of instantaneous short-circuit trip unit	480 A
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit	
protection of the main circuit	
• at 400 V	gG 63 A
● at 500 V ● at 690 V	gG 63 A
• at 690 v Installation/ mounting/ dimensions	gG 63 A
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	Solew and shap on mountaing onto do min Divitain according to Divit Live of the
noight	97 mm
width	97 mm 45 mm
width	45 mm
depth	
	45 mm
depth required spacing	45 mm 97 mm
depth required spacing • with side-by-side mounting at the side	45 mm 97 mm
depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V	45 mm 97 mm 9 mm
depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards	45 mm 97 mm 9 mm 30 mm
depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards	45 mm 97 mm 9 mm 30 mm 30 mm
depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side	45 mm 97 mm 9 mm 30 mm 30 mm
depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm
depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm
depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm 30 mm 30 mm
depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — at the side	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm 30 mm 30 mm
depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V - downwards - upwards - at the side • for live parts at 400 V - downwards - upwards - at the side • for grounded parts at 500 V	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm 30 mm 30 mm 9 mm
depth required spacing  • with side-by-side mounting at the side • for grounded parts at 400 V	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm
depth required spacing  • with side-by-side mounting at the side • for grounded parts at 400 V	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm
depth required spacing  • with side-by-side mounting at the side • for grounded parts at 400 V	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm
depth required spacing  • with side-by-side mounting at the side • for grounded parts at 400 V	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm
depth required spacing      with side-by-side mounting at the side      for grounded parts at 400 V          — downwards          — upwards          — at the side      for live parts at 400 V          — downwards          — upwards          — at the side      for grounded parts at 500 V          — downwards          — upwards          — at the side      for grounded parts at 500 V          — downwards          — upwards          — at the side	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm 30 mm 30 mm 30 mm
depth         required spacing         • with side-by-side mounting at the side         • for grounded parts at 400 V         - downwards         - upwards         - at the side         • for live parts at 400 V         - downwards         - upwards         - at the side         • for live parts at 400 V         - downwards         - upwards         - at the side         • for grounded parts at 500 V         - downwards         - upwards         - at the side         • for live parts at 500 V         - at the side         • for live parts at 500 V         - at the side         • for live parts at 500 V         - upwards         - upwards         - upwards         - upwards	45 mm 97 mm 9 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm 30 mm 30 mm 30 mm

— upwards			70 mm			
— backwards			0 mm			
— at the side			30 mm			
— forwards		0 mm				
<ul> <li>for live parts at 6</li> </ul>						
— downwards			70 mm			
— upwards		70 mm				
— backwards		0 mm				
— at the side			30 mm			
— forwards			0 mm			
<b>Connections/ Terminals</b>	;					
type of electrical conr	nection					
for main current circuit			screw-type terminals			
arrangement of electr circuit	ical connectors for main o	current	Top and bottom			
type of connectable c	onductor cross-sections					
<ul> <li>for main contacts</li> </ul>	6					
— solid or stra	inded		2x (1 2.5 mm²), 2x (2.5 10 mm²)			
— finely strand	<ul> <li>finely stranded with core end processing</li> </ul>			2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
tightening torque						
<ul> <li>for main contacts</li> </ul>	with screw-type terminals		2 2.5 N·m			
design of screwdriver	shaft		Diameter 5 to 6 mm			
size of the screwdrive	r tip		Pozidriv size 2			
design of the thread of the connection screw						
for main contacts			M4			
Safety related data						
T1 value for proof test interval or service life according to IEC 61508		10 a				
protection class IP on	the front according to IE	C 60529	IP20			
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front				
display version for switching status		Handle				
Certificates/ approvals	<b>J 1</b>					
General Product Approval		Declaration of Confo	rmity	Test Certificates		
		Deciditation of comonity				
Confirmation	<u>KC</u>	EAC	UK CA	CE EG-Konf.	<u>Special Test Certific-</u> ate	
Test Certificates	Marine / Shipping					
Type Test Certific- ates/Test Report	ABS	BUREAU		Lloyd's Register	PRS	
Marine / Shipping	other		Railway			
	<u>Confirmation</u>		Confirmation	<u>Vibration and Shock</u>		
Further information						
https://press.siemens.c Siemens is working o	to exit the Russian marke om/global/en/pressrelease/ n the renewal of the curre	siemens-wind-do ent EAC certifica	ates.			
	ther than the sanctioned E		the EAC certification if you inten ites Russia or Belarus).	d to import or offer to supp	oly these products to an	

Information on the packaging https://support.industry.siemens .com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10

#### Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-4FA10-0BA0 Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-4FA10-0BA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4FA10-0BA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2021-4FA10-0BA0&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4FA10-0BA0/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-4FA10-0BA0&objecttype=14&gridview=view1

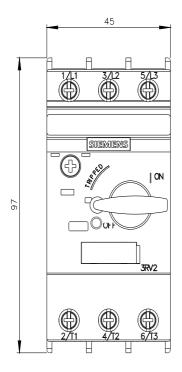

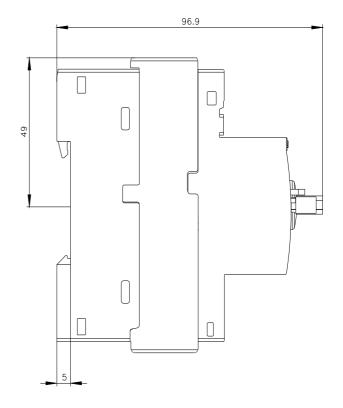

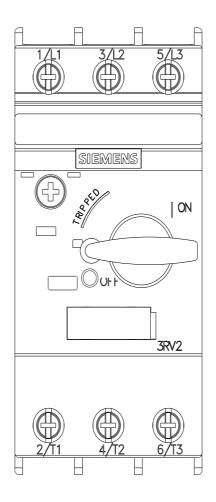

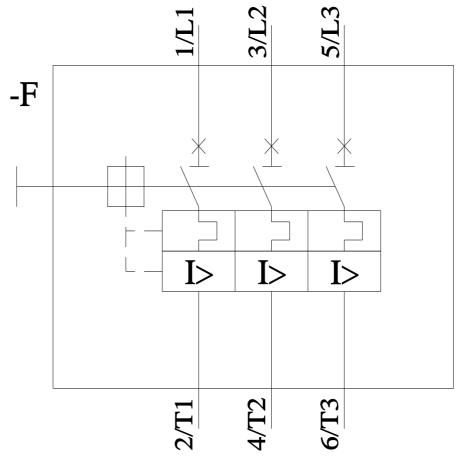

11/21/2022 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RV20214FA100BA0