# SIEMENS

#### Data sheet

### 3RV2021-4NA15



Circuit breaker size S0 for motor protection, CLASS 10 A-release 23...28 A N-release 364 A screw terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC

<u>6/73</u>	
product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	SO
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	13.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	4.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000
electrical endurance (operating cycles) typical	100 000
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	23 28 A
operating voltage	
<ul> <li>rated value</li> </ul>	20 690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz
operational current rated value	28 A
operational current	

• at AC-3 at 400 V rated value	28 A
<ul> <li>at AC-3e at 400 V rated value</li> </ul>	28 A
operating power	
• at AC-3	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	22 kW
• at AC-3e	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	22 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
design of the auxiliary switch	transverse
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
at 24 V	2 A
• at 120 V	0.5 A
• at 125 V	0.5 A
	0.5 A
• at 230 V	0.5 A
operational current of auxiliary contacts at DC-13	4.4
• at 24 V	1A
• at 60 V	0.15 A
Protective and monitoring functions	
product function	
<ul> <li>ground fault detection</li> </ul>	No
-	
phase failure detection	Yes
phase failure detection     trip class	CLASS 10
phase failure detection     trip class     design of the overload release	
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (lcu)	CLASS 10 thermal
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (lcu)         • at AC at 240 V rated value	CLASS 10 thermal 100 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value	CLASS 10 thermal 100 kA 55 kA
• phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA
• phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value	CLASS 10 thermal 100 kA 55 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (lcu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value         e at AC at 500 V rated value         e at AC at 690 V rated value         operating short-circuit current breaking capacity (Ics) at AC         e at 240 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value         e at AC at 500 V rated value         e at AC at 690 V rated value         e at AC at 690 V rated value         e at 240 V rated value         e at 240 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value         e at AC at 500 V rated value         e at AC at 690 V rated value         operating short-circuit current breaking capacity (Ics) at AC         e at 240 V rated value         e at 400 V rated value         e at 240 V rated value         e at 500 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA
• phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)     • at AC at 240 V rated value     • at AC at 400 V rated value     • at AC at 500 V rated value     • at AC at 690 V rated value     • at AC at 690 V rated value     • at 240 V rated value     • at 400 V rated value     • at 690 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 690 V rated value</li> <li>at 690 V rated value</li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 25 kA 364 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 25 kA 364 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 25 kA 364 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 25 kA 364 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 690 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 200 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>by ielded mechanical performance [hp]</li> </ul> </li> <li>for single-phase AC motor <ul> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> </ul> </li> </ul></li></ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A 28 A 28 A 29 hp 5 hp
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A 28 A 28 A 29 hp 5 hp 7.5 hp
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>at 200 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> <li>at 220/230 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A 28 A 28 A 7.5 hp 10 hp

product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link	magnetic
for short-circuit protection of the auxiliary switch required	Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A)
design of the fuse link for IT network for short-circuit	
protection of the main circuit	
• at 400 V	gL/gG 63 A
• at 500 V	gL/gG 63 A
• at 690 V	gL/gG 63 A
nstallation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	97 mm
width	45 mm
depth	97 mm
required spacing	
<ul> <li>with side-by-side mounting at the side</li> </ul>	0 mm
<ul> <li>for grounded parts at 400 V</li> </ul>	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 400 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
<ul> <li>for grounded parts at 500 V</li> </ul>	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
<ul> <li>for grounded parts at 690 V</li> </ul>	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
for live parts at 690 V	0 mm
	50 mm
— downwards	50 mm 50 mm
— upwards	
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
• for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
for main contacts	
- solid or stranded	2x (1 2.5 mm²), 2x (2.5 10 mm²)
<ul> <li>— finely stranded with core end processing</li> </ul>	2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>
Intervision of the stranded with core and processing     for AWG cables for main contacts	2x (1 2.5 mm <sup>-</sup> ), 2x (2.5 6 mm <sup>-</sup> ), 1x 10 mm <sup>-</sup> 2x (16 12), 2x (14 8)
	2A (10 12), 2A (14 0)
type of connectable conductor cross-sections	
for auxiliary contacts	$2 \times (0.5 + 1.5 \text{ mm}^2) \cdot 2 \times (0.75 + 2.5 \text{ mm}^2)$
— solid or stranded	2x (0.5 1.5 mm <sup>2</sup> ), 2x (0.75 2.5 mm <sup>2</sup> )
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)

<ul> <li>for auxiliary contact</li> </ul>	auxiliary contacts		2x (20 16), 2x (18 14)		
<ul> <li>for main contacts w</li> <li>for auxiliary contact</li> </ul>					
<ul> <li>for auxiliary contact</li> </ul>					
•	vith screw-type terminals		2 2.5 N·m		
design of screwdriver s	ts with screw-type termina	als	0.8 1.2 N·m		
design of screwdriver shaft			Diameter 5 to 6 mm		
size of the screwdriver t	tip		Pozidriv size 2		
design of the thread of t	the connection screw				
<ul> <li>for main contacts</li> </ul>			M4		
<ul> <li>of the auxiliary and control contacts</li> </ul>			M3		
afety related data					
B10 value					
with high demand rate according to SN 31920			5 000		
proportion of dangerous failures					
with low demand rate according to SN 31920		50 %			
with low demand rate according to SN 31920     with high demand rate according to SN 31920		50 %			
failure rate [FIT]					
	ate according to SN 31920	0	50 FIT		
T1 value for proof test inte 61508			10 a		
protection class IP on th	ne front according to IE	C 60529	IP20		
touch protection on the	•		finger-safe, for vertical contac	t from the front	
display version for switchi			Handle		
ertificates/ approvals					
					For use in hazard-
General Product Approv	val				ous locations
For use in hazard- ous locations	Declaration of Conform	nity	Test Certificates		Marine / Shipping
	Declaration of Conform	UK CA	Test Certificates	<u>Special Test Certific-</u> <u>ate</u>	Marine / Shipping
ous locations	C€	UK CA	Type Test Certific-		۲
ous locations	C€	ity UK Kegster Lits	Type Test Certific-		ABS
ous locations	EG-Konf.		Type Test Certific-		ABS
ous locations	EG-Konf.		Type Test Certificates/Test Report         ates/Test Report		ABS
ous locations	EG-Konf.	UK Llovds Register UR	Type Test Certificates/Test Report         ates/Test Report		ABS
ous locations Warine / Shipping UREAU URE	Railway Vibration and Shock	Confirmation	Type Test Certificates/Test Report         Image: state s		ABS
ous locations	Railway Vibration and Shock	Lioveds Register Lits Confirmation	Type Test Certificates/Test Report         Image: states/Test Report<		ABS
ous locations	Railway Vibration and Shock exit the Russian marke //global/en/pressrelease/s the renewal of the curre	Lissenens-wind-dow nt EAC certificat	Type Test Certificates/Test Report         Image: states/Test Report<	ate	other Confirmation

Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10

#### Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-4NA15 Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-4NA15

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4NA15


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2021-4NA15&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4NA15/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-4NA15&objecttype=14&gridview=view1

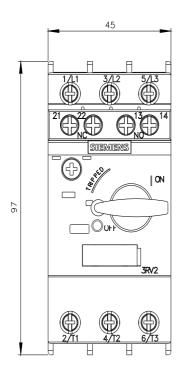

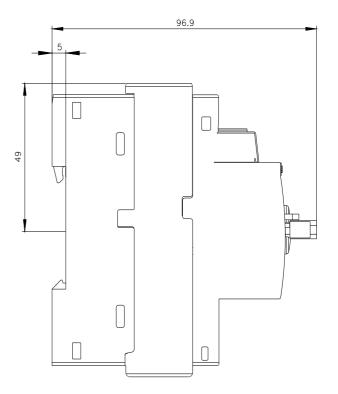

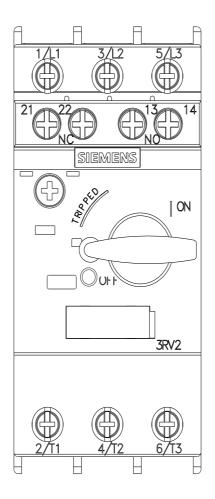

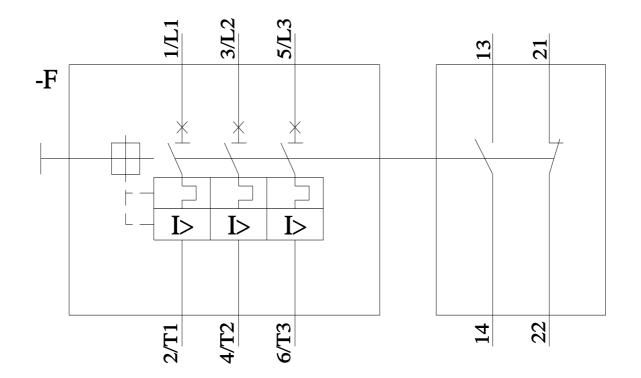

11/21/2022 🖸

8/16/2023

Subject to change without notice © Copyright Siemens

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: <u>3RV20214NA15</u>