# SIEMENS

### Data sheet

## 3RV2021-4NA25



Circuit breaker size S0 for motor protection, CLASS 10 A-release 23...28 A N-release 364 A Spring-type terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S0
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	13.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	4.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000
electrical endurance (operating cycles) typical	100 000
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
<ul> <li>during storage</li> </ul>	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	23 28 A
operating voltage	
rated value	20 690 V
• at AC-3 rated value maximum	690 V
• at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	28 A
operational current	

• at AC-3 at 400 V rated value	28 A
<ul> <li>at AC-3e at 400 V rated value</li> </ul>	28 A
operating power	
• at AC-3	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	22 kW
• at AC-3e	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	22 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
design of the auxiliary switch	transverse
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
at 24 V	2 A
• at 120 V	0.5 A
• at 125 V	0.5 A
	0.5 A
• at 230 V	0.5 A
operational current of auxiliary contacts at DC-13	4.4
• at 24 V	1A
• at 60 V	0.15 A
Protective and monitoring functions	
product function	
<ul> <li>ground fault detection</li> </ul>	No
-	
phase failure detection	Yes
phase failure detection     trip class	CLASS 10
phase failure detection     trip class     design of the overload release	
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (lcu)	CLASS 10 thermal
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (lcu)         • at AC at 240 V rated value	CLASS 10 thermal 100 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value	CLASS 10 thermal 100 kA 55 kA
• phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA
• phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value	CLASS 10 thermal 100 kA 55 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (lcu)         • at AC at 240 V rated value         • at AC at 400 V rated value         • at AC at 500 V rated value         • at AC at 690 V rated value         • at AC at 690 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value         e at AC at 500 V rated value         e at AC at 690 V rated value         operating short-circuit current breaking capacity (Ics) at AC         e at 240 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value         e at AC at 500 V rated value         e at AC at 690 V rated value         e at AC at 690 V rated value         e at 240 V rated value         e at 240 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)         e at AC at 240 V rated value         e at AC at 400 V rated value         e at AC at 500 V rated value         e at AC at 690 V rated value         operating short-circuit current breaking capacity (Ics) at AC         e at 240 V rated value         e at 400 V rated value         e at 240 V rated value         e at 500 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA
• phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu)     • at AC at 240 V rated value     • at AC at 400 V rated value     • at AC at 500 V rated value     • at AC at 690 V rated value     • at AC at 690 V rated value     • at 240 V rated value     • at 400 V rated value     • at 690 V rated value	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 690 V rated value</li> <li>at 690 V rated value</li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA
phase failure detection     trip class     design of the overload release     maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 25 kA 364 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 25 kA 364 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 25 kA 364 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 25 kA 364 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 690 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>at 600 V rated value</li></ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu)         <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 400 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> </ul> </li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A 28 A
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>by ielded mechanical performance [hp]</li> </ul> </li> <li>for single-phase AC motor <ul> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> </ul> </li> </ul></li></ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A 28 A 28 A 29 hp 5 hp
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>at 600 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A 28 A 28 A 29 hp 5 hp 7.5 hp
<ul> <li>phase failure detection</li> <li>trip class</li> <li>design of the overload release</li> <li>maximum short-circuit current breaking capacity (Icu) <ul> <li>at AC at 240 V rated value</li> <li>at AC at 400 V rated value</li> <li>at AC at 500 V rated value</li> <li>at AC at 690 V rated value</li> <li>at AC at 690 V rated value</li> </ul> </li> <li>operating short-circuit current breaking capacity (Ics) at AC <ul> <li>at 240 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>at 200 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> <li>at 220/230 V rated value</li> </ul> </li> </ul>	CLASS 10 thermal 100 kA 55 kA 10 kA 4 kA 100 kA 25 kA 5 kA 2 kA 364 A 28 A 28 A 28 A 28 A 7.5 hp 10 hp

product function about aircuit protoction	Van			
product function short circuit protection	Yes			
design of the short-circuit trip design of the fuse link	magnetic			
for short-circuit protection of the auxiliary switch required	Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A)			
design of the fuse link for IT network for short-circuit				
protection of the main circuit				
• at 400 V	gL/gG 63 A			
• at 500 V	gL/gG 63 A			
• at 690 V	gL/gG 63 A			
Installation/ mounting/ dimensions				
mounting position	any			
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715			
height	119 mm			
width	45 mm			
depth	97 mm			
required spacing				
• with side-by-side mounting at the side	0 mm			
<ul> <li>for grounded parts at 400 V</li> </ul>				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
• for live parts at 400 V				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
<ul> <li>for grounded parts at 500 V</li> </ul>				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
• for live parts at 500 V				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
<ul> <li>for grounded parts at 690 V</li> </ul>				
— downwards	50 mm			
— upwards	50 mm			
— backwards	0 mm			
— at the side	30 mm			
— forwards	0 mm			
• for live parts at 690 V				
— downwards	50 mm			
— upwards	50 mm			
- backwards	0 mm			
— at the side	30 mm			
— forwards	0 mm			
Connections/ Terminals				
type of electrical connection	anring loaded terminals			
for main current circuit     for cuviliant and control circuit	spring-loaded terminals			
for auxiliary and control circuit	spring-loaded terminals			
arrangement of electrical connectors for main current circuit	Top and bottom			
type of connectable conductor cross-sections				
for main contacts				
— solid or stranded	2x (1 10 mm²)			
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 6 mm²)			
— finely stranded without core end processing	2x (1 6 mm <sup>2</sup> )			
for AWG cables for main contacts	2x (18 8)			
type of connectable conductor cross-sections				
for auxiliary contacts				
— solid or stranded	2x (0.5 2.5 mm²)			

— finely strand	ded with core end processing	g 2x	( (0.5 1.5 mm²)			
- finely stranded without core end processing			2x (0.5 1.5 mm <sup>2</sup> )			
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>			2x (20 14)			
design of screwdriver shaft			iameter 3 mm			
size of the screwdriver tip			3,0 x 0,5 mm			
Safety related data						
B10 value						
<ul> <li>with high demand rate according to SN 31920</li> </ul>			5 000			
proportion of dangerous failures						
<ul> <li>with low demand rate according to SN 31920</li> </ul>			) %			
<ul> <li>with high demand</li> </ul>	<ul> <li>with high demand rate according to SN 31920</li> </ul>					
failure rate [FIT]						
<ul> <li>with low demand</li> </ul>	rate according to SN 31920	50	) FIT			
T1 value for proof test i 61508	T1 value for proof test interval or service life according to IEC 61508					
protection class IP on	the front according to IEC	60529 IP	20			
touch protection on th	ne front according to IEC 6	<b>0529</b> fin	nger-safe, for vertical contact	from the front		
display version for switching status			Handle			
Certificates/ approvals						
General Product App	roval				For use in hazard- ous locations	
	<u>Confirmation</u>	Ű	KC	EHC	ATEX ATEX	
For use in hazard- ous locations	Declaration of Conformi	ity	Test Certificates		Marine / Shipping	
IECE×	UK CA	CE EG-Konf.	<u>Type Test Certific-</u> ates/Test Report	<u>Special Test Certific-</u> <u>ate</u>	ABS	
Marine / Shipping					other	
B U REAU VERITAS		Lloyd's Register urs	PRS	RINA	<u>Confirmation</u>	
other	Railway					
^	Vibration and Shock	<b>Confirmation</b>				

#### **Further information**


Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) https://ww .com/ic10 sieme Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-4NA25 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-4NA25 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


#### https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4NA25


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2021-4NA25&lang=en Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4NA25/


har

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-4NA25&objecttype=14&gridview=view1

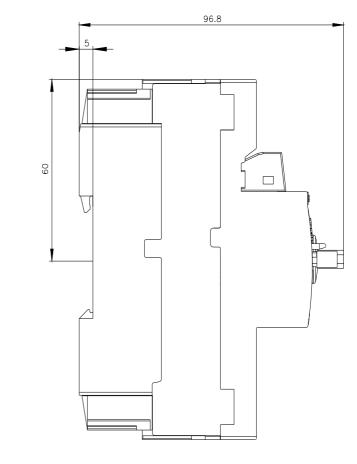

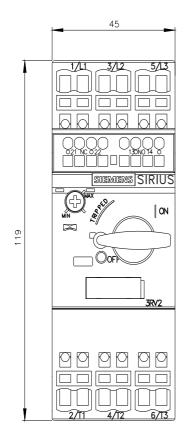

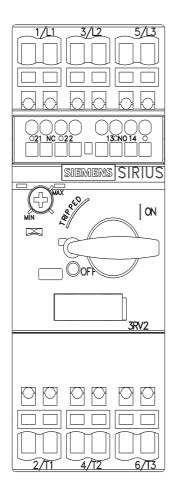

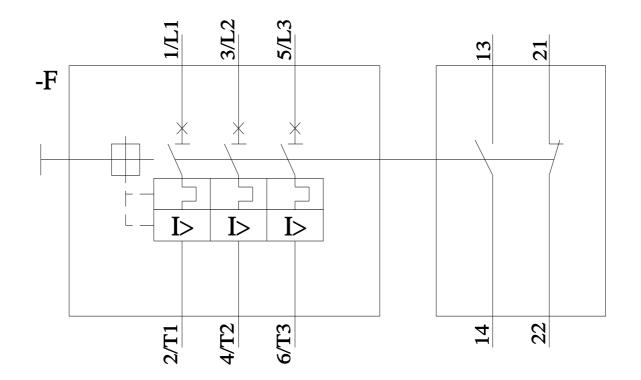

11/21/2022 🖸

8/17/2023

Subject to change without notice © Copyright Siemens

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: <u>3RV20214NA25</u>