## **SIEMENS**

Data sheet 3RV2031-4DA10



Circuit breaker size S2 for motor protection, CLASS 10 A-release 18...25 A N-release 325 A Screw terminal Standard switching capacity

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S2
size of contactor can be combined company-specific	S2
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
at AC in hot operating state	14.5 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	4.8 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms Sinus
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	50 000
<ul> <li>of auxiliary contacts typical</li> </ul>	50 000
electrical endurance (operating cycles) typical	50 000
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/15/2014
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
installation altitude at height above sea level maximum ambient temperature	2 000 m
	2 000 m -20 +60 °C
ambient temperature	
ambient temperature  • during operation	-20 +60 °C
<ul><li>ambient temperature</li><li>during operation</li><li>during storage</li></ul>	-20 +60 °C -50 +80 °C
ambient temperature  • during operation  • during storage  • during transport	-20 +60 °C -50 +80 °C -50 +80 °C
ambient temperature	-20 +60 °C -50 +80 °C -50 +80 °C
ambient temperature	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 %
ambient temperature     • during operation     • during storage     • during transport relative humidity during operation  Main circuit number of poles for main current circuit adjustable current response value current of the current-	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 %
ambient temperature     • during operation     • during storage     • during transport relative humidity during operation  Main circuit  number of poles for main current circuit adjustable current response value current of the current-dependent overload release	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 %
ambient temperature  • during operation  • during storage  • during transport  relative humidity during operation  Main circuit  number of poles for main current circuit  adjustable current response value current of the current-dependent overload release  operating voltage	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 %
ambient temperature     • during operation     • during storage     • during transport relative humidity during operation  Main circuit  number of poles for main current circuit adjustable current response value current of the current-dependent overload release operating voltage     • rated value	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 % 3 18 25 A
ambient temperature     • during operation     • during storage     • during transport relative humidity during operation  Main circuit  number of poles for main current circuit adjustable current response value current of the current-dependent overload release operating voltage     • rated value     • at AC-3 rated value maximum	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 % 3 18 25 A
ambient temperature     • during operation     • during storage     • during transport relative humidity during operation  Main circuit  number of poles for main current circuit adjustable current response value current of the current-dependent overload release operating voltage     • rated value     • at AC-3 rated value maximum     • at AC-3e rated value maximum	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 % 3 18 25 A 20 690 V 690 V

<ul> <li>at AC-3 at 400 V rated value</li> </ul>	25 A
at AC-3e at 400 V rated value	25 A
operating power	
• at AC-3	
— at 230 V rated value	5.5 kW
— at 400 V rated value	11 kW
— at 500 V rated value	15 kW
— at 690 V rated value	22 kW
• at AC-3e	
— at 230 V rated value	5.5 kW
— at 400 V rated value	11 kW
— at 500 V rated value	15 kW
— at 690 V rated value	22 kW
operating frequency	
• at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Protective and monitoring functions	10 1/11
product function	No
ground fault detection	No
phase failure detection	Yes
trip class	CLASS 10
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	
• at AC at 240 V rated value	100 kA
<ul> <li>at AC at 400 V rated value</li> </ul>	65 kA
<ul> <li>at AC at 500 V rated value</li> </ul>	12 kA
<ul> <li>at AC at 690 V rated value</li> </ul>	5 kA
operating short-circuit current breaking capacity (Ics) at AC	
at 240 V rated value	100 kA
• at 400 V rated value	30 kA
at 500 V rated value	6 kA
at 690 V rated value	3 kA
	325 A
response value current of instantaneous short-circuit trip unit	325 A
response value current of instantaneous short-circuit trip unit UL/CSA ratings	325 A
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value	25 A
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value	
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]	25 A
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor	25 A 25 A
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value	25 A 25 A 2 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value	25 A 25 A
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor	25 A 25 A 2 hp 5 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value	25 A 25 A 2 hp 5 hp 7.5 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value	25 A 25 A 2 hp 5 hp 7.5 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the fuse link for IT network for short-circuit protection of the main circuit	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp  Yes magnetic
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp  Yes magnetic none required
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp  Yes magnetic  none required 100 80
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 690 V	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp  Yes magnetic  none required 100
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp  Yes magnetic  none required 100 80 63
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp  Yes magnetic  none required 100 80 63
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp  Yes magnetic  none required 100 80 63  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp  Yes magnetic  none required 100 80 63  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 140 mm
response value current of instantaneous short-circuit trip unit  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method	25 A 25 A 2 hp 5 hp 7.5 hp 10 hp 20 hp 25 hp  Yes magnetic  none required 100 80 63  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715

	_	
required spacing		
with side-by-side mounting at the side	0 mm	
<ul> <li>for grounded parts at 400 V</li> </ul>		
— downwards	50 mm	
— upwards	50 mm	
— at the side	10 mm	
• for live parts at 400 V		
— downwards	50 mm	
— upwards	50 mm	
— at the side	10 mm	
<ul> <li>for grounded parts at 500 V</li> </ul>		
— downwards	50 mm	
— upwards	50 mm	
— at the side	10 mm	
• for live parts at 500 V		
— downwards	50 mm	
— upwards	50 mm	
— at the side	10 mm	
• for grounded parts at 690 V		
— downwards	50 mm	
— upwards	50 mm	
— at the side	10 mm	
• for live parts at 690 V		
— downwards	50 mm	
— upwards	50 mm	
— at the side	10 mm	
Connections/ Terminals	10 11111	
type of electrical connection		
• for main current circuit	screw-type terminals	
arrangement of electrical connectors for main current	Top and bottom	
circuit	rop and bottom	
type of connectable conductor cross-sections		
• for main contacts		
— solid or stranded	2x (1 25 mm²), 1x (1 35 mm²)	
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 16 mm²), 1x (1 25 mm²)	
<ul> <li>for AWG cables for main contacts</li> </ul>	2x (18 3), 1x (18 2)	
tightening torque		
for main contacts with screw-type terminals	3 4.5 N·m	
design of screwdriver shaft	Diameter 5 to 6 mm	
size of the screwdriver tip	Pozidriv size 2	
design of the thread of the connection screw		
for main contacts	M6	
Safety related data		
B10 value		
with high demand rate according to SN 31920	5 000	
proportion of dangerous failures		
with low demand rate according to SN 31920	50 %	
with high demand rate according to SN 31920     with high demand rate according to SN 31920	50 %	
failure rate [FIT]	00 /0	
	50 EIT	
with low demand rate according to SN 31920  The value for proof test interval or convice life according to IEC.  The value for proof test interval or convice life according to IEC.	50 FIT	
T1 value for proof test interval or service life according to IEC 61508	10 a	
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
display version for switching status	Handle	
Certificates/ approvals		
		For use in hazard-
General Product Approval		ous locations



Confirmation



<u>KC</u>





For use in hazardous locations

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping







Special Test Certificate Type Test Certificates/Test Report



Marine / Shipping











Confirmation

other

other

Railway



Vibration and Shock

Confirmation

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2031-4DA10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2031-4DA10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2031-4DA10

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$ 


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2031-4DA10&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RV2031-4DA10/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2031-4DA10&objecttype=14&gridview=view1

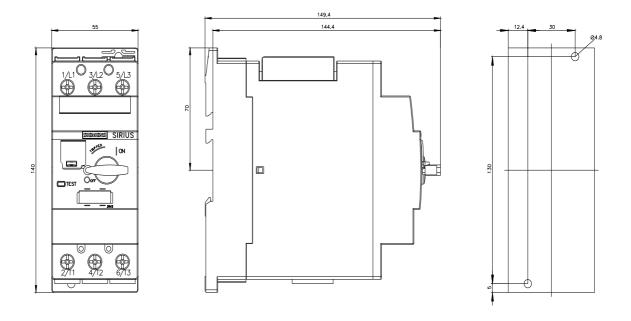

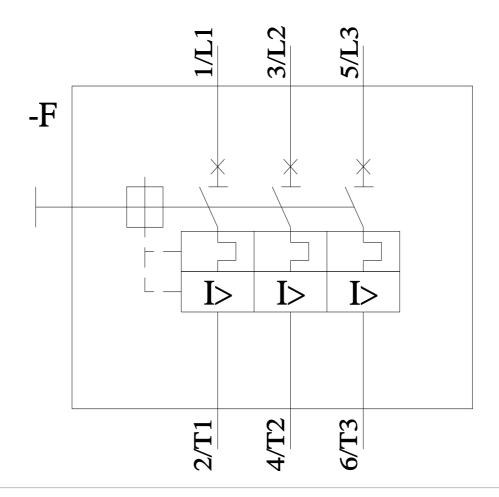

last modified: 11/21/2022 🖸

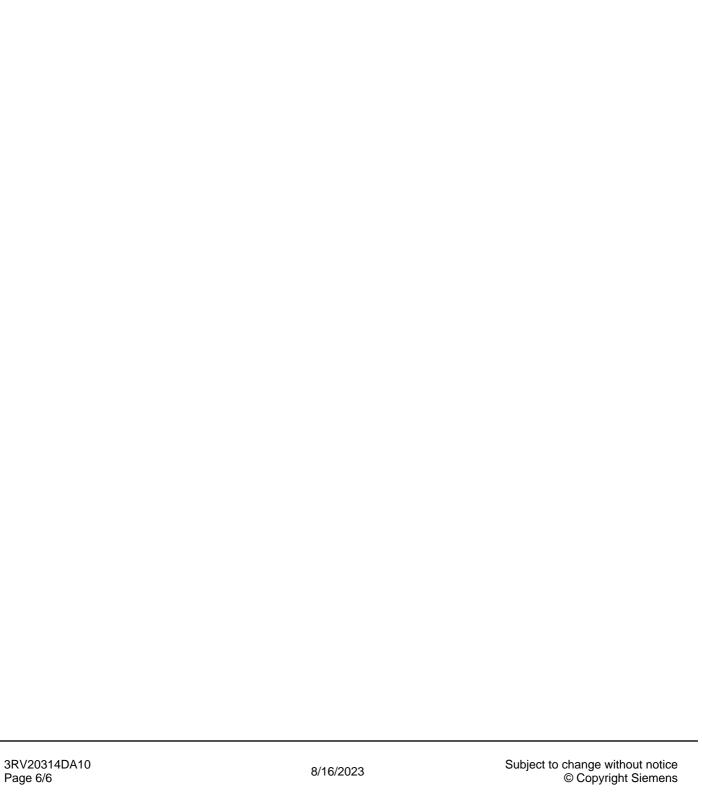

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV20314DA10