SIEMENS

Data sheet 3RV2311-0CC20





Circuit breaker size S00 for starter combination Rated current 0.25 A N-release 3.3 A Spring-type terminal Standard switching capacity



product brand name	SIRIUS	
product designation	Circuit breaker	
design of the product	For starter combinations	
product type designation	3RV2	
General technical data		
size of the circuit-breaker	S00	
size of contactor can be combined company-specific	S00, S0	
product extension auxiliary switch	Yes	
power loss [W] for rated value of the current		
 at AC in hot operating state 	5.5 W	
at AC in hot operating state per pole	1.8 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
shock resistance according to IEC 60068-2-27	25g / 11 ms	
mechanical service life (operating cycles)		
 of the main contacts typical 	100 000	
of auxiliary contacts typical	100 000	
electrical endurance (operating cycles) typical	100 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2009	
SVHC substance name	Lead - 7439-92-1	
Weight	0.3 kg	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
 during operation 	-20 +60 °C	
during storage	-50 +80 °C	
during transport	-50 +80 °C	
relative humidity during operation	10 95 %	
Environmental footprint		
Siemens Eco Profile (SEP)	Siemens EcoTech	
Main circuit		
number of poles for main current circuit	3	
type of voltage for main current circuit	AC/DC	
operating voltage		
• rated value	20 690 V	
 at AC-3 rated value maximum 	690 V	

• at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	0.25 A
operational current	
at AC-3 at 400 V rated value	0.25 A
at AC-3e at 400 V rated value	0.25 A
operating power	
• at AC-3	
— at 230 V rated value	0 kW
— at 400 V rated value	0.1 kW
— at 500 V rated value	0.1 kW
— at 690 V rated value	0.1 kW
• at AC-3e	
— at 230 V rated value	0 kW
— at 400 V rated value	0.1 kW
— at 500 V rated value	0.1 kW
— at 690 V rated value	0.1 kW
operating frequency	
• at AC-3 maximum	15 1/h
at AC-3 maximum	15 1/h
Auxiliary circuit	
type of voltage for auxiliary and control circuit	AC/DC
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
•	No
ground fault detection	No No
phase failure detection	No
maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value	100 kA
	100 kA
at AC at 500 V rated value	100 kA
at AC at 500 V rated value	100 kA
at AC at 690 V rated value	100 kA
operating short-circuit current breaking capacity (lcs) at AC	400 l-A
at 240 V rated value	100 kA
• at 400 V rated value	100 kA
at 500 V rated value	100 kA
at 690 V rated value	100 kA
response value current of instantaneous short-circuit trip unit	3.3 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	0.25 A
at 600 V rated value	0.25 A
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	106 mm
width	45 mm
depth	97 mm
required spacing	
 with side-by-side mounting at the side 	0 mm
 for grounded parts at 400 V 	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
 for live parts at 400 V 	

— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
● for grounded parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for grounded parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	spring-loaded terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
 for main contacts 	
— solid or stranded	2x (0,5 4 mm²)
 finely stranded with core end processing 	2x (0.5 2.5 mm²)
 finely stranded without core end processing 	2x (0.5 2.5 mm²)
for AWG cables for main contacts	2x (20 12)
design of screwdriver shaft	Diameter 3 mm
size of the screwdriver tip	3,0 x 0,5 mm
Safety related data	
product function suitable for safety function	Yes
suitability for use	
 safety-related switching on 	No
safety-related switching OFF	Yes
service life maximum	10 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
with high demand rate according to SN 31920	50 %
B10 value with high demand rate according to SN 31920	5 000
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary IEC 61508	Yes
safety device type according to IEC 61508-2	Type A
T1 value	
 for proof test interval or service life according to IEC 61508 	10 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	

Approvals Certificates

General Product Approval









KC



General Product Approval

Test Certificates

Marine / Shipping

BIS CRS

Type Test Certificates/Test Report

Special Test Certific-<u>ate</u>







Marine / Shipping

other









Miscellaneous

Confirmation



Railway

Environment

EcoTech

Special Test Certific-<u>ate</u>

Confirmation



Environmental Confirmations

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2311-0CC20

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2311-0CC20

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2311-0CC20


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2311-0CC20&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2311-0CC20&objecttype=14&gridview=view1

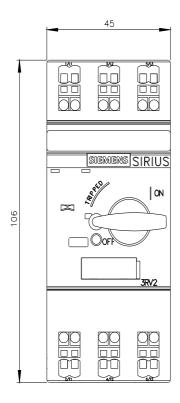

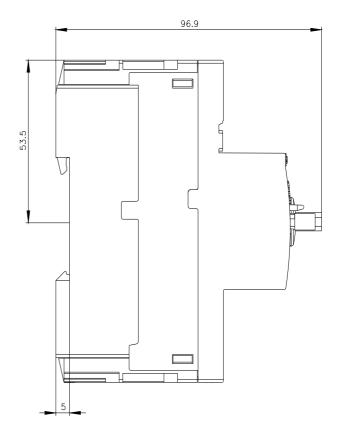

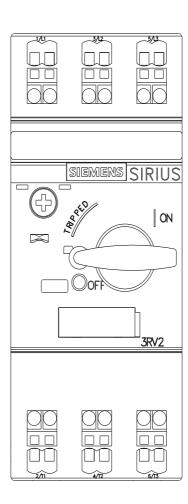

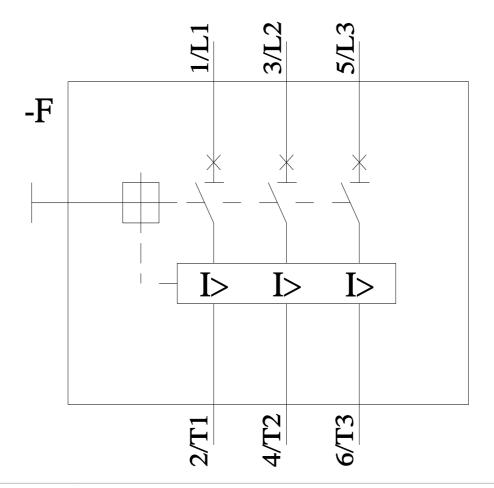

last modified: 4/18/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV23110CC20