SIEMENS

Data sheet 3RV2311-1DC20



Circuit breaker size S00 for starter combination Rated current 3.2 A N release 42 A Spring-type terminal Standard switching capacity



product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For starter combinations
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	7.25 W
at AC in hot operating state per pole	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
of auxiliary contacts typical	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
operating voltage	
rated value	20 690 V
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	3.2 A
operational current	

 at AC-3 at 400 V rated value 	3.2 A
at AC-3e at 400 V rated value	3.2 A
operating power	
• at AC-3	
— at 230 V rated value	0.6 kW
— at 400 V rated value	1.1 kW
— at 500 V rated value	1.5 kW
— at 690 V rated value	2.2 kW
• at AC-3e	
— at 230 V rated value	0.6 kW
— at 400 V rated value	1.1 kW
— at 500 V rated value	1.5 kW
— at 690 V rated value	2.2 kW
operating frequency	
• at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	No
maximum short-circuit current breaking capacity (Icu)	INO
	100 kA
at AC at 400 V rated value	100 kA
at AC at 500 V rated value	100 kA
at AC at 500 V rated value	100 kA
at AC at 690 V rated value	10 kA
operating short-circuit current breaking capacity (lcs) at AC	
 at 240 V rated value 	100 kA
at 400 V rated value	100 kA
at 500 V rated value	100 kA
at 690 V rated value	10 kA
response value current of instantaneous short-circuit trip unit	42 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
 at 480 V rated value 	3.2 A
at 600 V rated value	3.2 A
yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	0.1 hp
— at 230 V rated value	0.25 hp
• for 3-phase AC motor	
— at 200/208 V rated value	0.5 hp
— at 220/230 V rated value	0.75 hp
— at 460/480 V rated value	2 hp
— at 575/600 V rated value	2 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit	.55
protection of the main circuit	
• at 400 V	gL/gG 25 A
● at 500 V	gL/gG 32 A
• at 690 V	gL/gG 25 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	106 mm
width	45 mm
WIME	TO IIIIII

depth	97 mm
required spacing	Of fillin
with side-by-side mounting at the side	0 mm
• for grounded parts at 400 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 400 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
 for grounded parts at 500 V 	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
 for live parts at 500 V 	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
for grounded parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
for live parts at 690 V— downwards	50 mm
— upwards	50 mm
— upwards — backwards	0 mm
— at the side	30 mm
at the side	30 11111
— forwards	0 mm
— forwards Connections/ Terminals	0 mm
— forwards Connections/ Terminals type of electrical connection	0 mm
Connections/ Terminals	0 mm spring-loaded terminals
Connections/ Terminals type of electrical connection	
type of electrical connection • for main current circuit arrangement of electrical connectors for main current	spring-loaded terminals
type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit	spring-loaded terminals
type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded	spring-loaded terminals
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²)
type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²)
type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing • for AWG cables for main contacts	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12)
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12)
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes 10 a
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes 10 a Yes
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes 10 a Yes
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes 10 a Yes
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes 10 a Yes
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes 10 a Yes 40 % 50 % 5 000
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes 40 % 50 % 5 000 50 FIT
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes 10 a Yes 40 % 50 % 5 000 50 FIT
type of electrical connection	spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm Yes No Yes 40 % 50 % 5 000 50 FIT

safety device type according to IEC 61508-2	Type A
T1 value	
 for proof test interval or service life according to IEC 61508 	10 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	
display version for switching status	Handle
Approvals Certificates	

General Product Approval







Confirmation





Test Certificates

Marine / Shipping

Type Test Certificates/Test Report

Special Test Certific-<u>ate</u>









Marine / Shipping

other

Railway





Miscellaneous

Confirmation



Special Test Certificate

Railway

Environment

Confirmation



Siemens **EcoTech**



Environmental Confirmations

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2311-1DC20

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2311-1DC20}$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2311-1DC20


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2311-1DC20&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2311-1DC20/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2311-1DC20&objecttype=14&gridview=view1

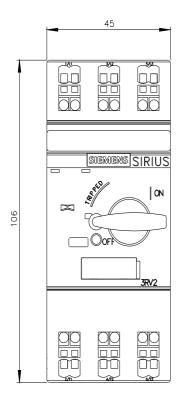

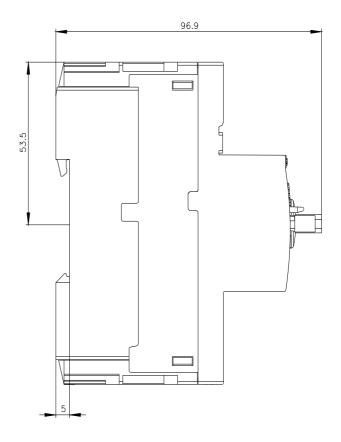

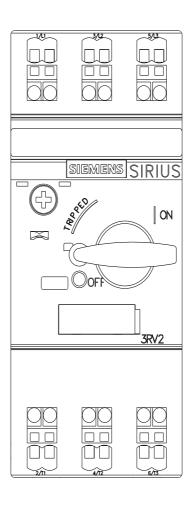

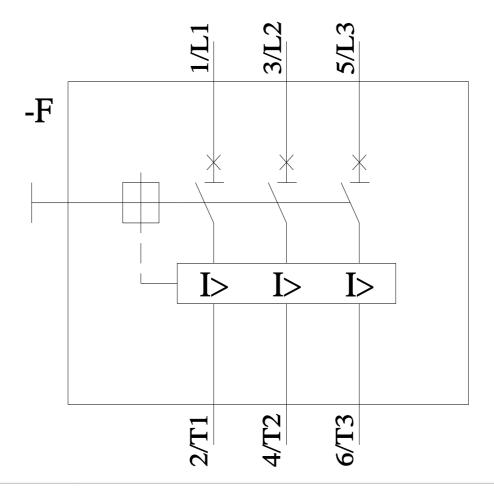

last modified: 4/12/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV23111DC20