SIEMENS

Data sheet 3RV2321-1CC10



Circuit breaker size S0 for starter combination Rated current 2.5 A N-release 33 A screw terminal Standard switching capacity

product designation design of the product product type designation SRV2 General technical data size of the circuit-breaker size of contactor can be combined company-specific product extension auxiliary switch power loss [W] for rated value of the current at AC in hot operating state at AC in hot operating state per pole insulation voltage with degree of pollution 3 at AC rated value for starter combinations SRV2 S0 S0 S0 S0 Yes 7.25 W 2.4 W insulation voltage with degree of pollution 3 at AC rated value 690 V surge voltage resistance rated value 6 kV	product brand name	SIRIUS
design of the product product type designation 3RV2 General technical data size of the circuit-breaker So size of contactor can be combined company-specific product extension auxiliary switch yes power loss [W] for rated value of the current • at AC in hot operating state • at AC in hot operating state per pole insulation voltage with degree of pollution 3 at AC rated value surge voltage resistance rated value For starter combinations 3RV2 So 7.25 So So So Yes 7.25 W 690 V 690 V Surge voltage resistance rated value 6 kV	•	
product type designation General technical data size of the circuit-breaker size of contactor can be combined company-specific product extension auxiliary switch power loss [W] for rated value of the current • at AC in hot operating state • at AC in hot operating state per pole insulation voltage with degree of pollution 3 at AC rated value surge voltage resistance rated value 3RV2 S0 S0 S0 Yes 7.25 W 2.4 W 690 V 690 V		
size of the circuit-breaker size of contactor can be combined company-specific product extension auxiliary switch power loss [W] for rated value of the current • at AC in hot operating state • at AC in hot operating state per pole insulation voltage with degree of pollution 3 at AC rated value surge voltage resistance rated value S00, S0 Yes 7.25 W 2.4 W 690 V surge voltage resistance rated value 6 kV		
size of contactor can be combined company-specific product extension auxiliary switch power loss [W] for rated value of the current • at AC in hot operating state • at AC in hot operating state per pole insulation voltage with degree of pollution 3 at AC rated value surge voltage resistance rated value \$ 500, \$0 Yes 7.25 W • at AC in hot operating state per pole 2.4 W 690 V surge voltage resistance rated value 6 kV		
product extension auxiliary switch power loss [W] for rated value of the current • at AC in hot operating state • at AC in hot operating state per pole insulation voltage with degree of pollution 3 at AC rated value surge voltage resistance rated value Yes 7.25 W 2.4 W 690 V 690 V	size of the circuit-breaker	SO
power loss [W] for rated value of the current • at AC in hot operating state 7.25 W • at AC in hot operating state per pole 2.4 W insulation voltage with degree of pollution 3 at AC rated value 690 V surge voltage resistance rated value 6 kV	size of contactor can be combined company-specific	S00, S0
 at AC in hot operating state at AC in hot operating state per pole at AC in hot operating state per pole 4 W insulation voltage with degree of pollution 3 at AC rated value 690 V surge voltage resistance rated value 6 kV 	product extension auxiliary switch	Yes
 at AC in hot operating state per pole insulation voltage with degree of pollution 3 at AC rated value 690 V surge voltage resistance rated value 6 kV 	power loss [W] for rated value of the current	
insulation voltage with degree of pollution 3 at AC rated value 690 V surge voltage resistance rated value 6 kV	 at AC in hot operating state 	7.25 W
surge voltage resistance rated value 6 kV	 at AC in hot operating state per pole 	2.4 W
	insulation voltage with degree of pollution 3 at AC rated value	690 V
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	surge voltage resistance rated value	6 kV
SNOCK resistance according to IEC 60068-2-27 25g / 11 ms	shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	mechanical service life (operating cycles)	
• of the main contacts typical 100 000	 of the main contacts typical 	100 000
• of auxiliary contacts typical 100 000	of auxiliary contacts typical	100 000
electrical endurance (operating cycles) typical 100 000	electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2 Q	reference code according to IEC 81346-2	Q
Substance Prohibitance (Date) 10/01/2009	Substance Prohibitance (Date)	10/01/2009
Ambient conditions	Ambient conditions	
installation altitude at height above sea level maximum 2 000 m	installation altitude at height above sea level maximum	2 000 m
ambient temperature	ambient temperature	
• during operation -20 +60 °C	during operation	-20 +60 °C
• during storage -50 +80 °C	during storage	-50 +80 °C
• during transport -50 +80 °C	during transport	-50 +80 °C
relative humidity during operation 10 95 %	relative humidity during operation	10 95 %
Main circuit	Main circuit	
number of poles for main current circuit 3	number of poles for main current circuit	3
operating voltage	operating voltage	
• rated value 20 690 V	• rated value	20 690 V
• at AC-3 rated value maximum 690 V	 at AC-3 rated value maximum 	690 V
• at AC-3e rated value maximum 690 V	at AC-3e rated value maximum	690 V
operating frequency rated value 50 60 Hz	operating frequency rated value	50 60 Hz
operational current rated value 2.5 A	operational current rated value	2.5 A
operational current	operational current	
• at AC-3 at 400 V rated value 2.5 A	• at AC-3 at 400 V rated value	2.5 A
• at AC-3e at 400 V rated value 2.5 A	at AC-3e at 400 V rated value	2.5 A
operating power	operating power	
• at AC-3	• at AC-3	

— at 230 V rated value	0.4 kW
— at 400 V rated value	0.8 kW
— at 500 V rated value	1.1 kW
— at 690 V rated value	1.5 kW
• at AC-3e	
— at 230 V rated value	0.4 kW
— at 400 V rated value	0.8 kW
— at 500 V rated value	1.1 kW
— at 690 V rated value	1.5 kW
operating frequency	
• at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
	0
Protective and monitoring functions	
product function	N-
ground fault detection	No No
phase failure detection	No
maximum short-circuit current breaking capacity (Icu)	
at AC at 240 V rated value	100 kA
 at AC at 400 V rated value 	100 kA
 at AC at 500 V rated value 	100 kA
at AC at 690 V rated value	10 kA
operating short-circuit current breaking capacity (Ics) at AC	
• at 240 V rated value	100 kA
 at 400 V rated value 	100 kA
• at 500 V rated value	100 kA
at 690 V rated value	10 kA
	22.4
response value current of instantaneous short-circuit trip unit	33 A
response value current of instantaneous short-circuit trip unit UL/CSA ratings	33 A
	33 A
UL/CSA ratings	2.5 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	2.5 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp]	2.5 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor	2.5 A 2.5 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value	2.5 A
ull-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor	2.5 A 2.5 A 0.17 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value	2.5 A 2.5 A 0.17 hp 0.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 0 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards	2.5 A 2.5 A 0.17 hp 0.5 hp 0.5 hp 1 hp 1.5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm

size of the screwdriver tip design of the thread of the connection screw	Pozidriv size 2 M4 5 000 50 % 50 % 50 FIT 10 a IP20 finger-safe, for vertical contact from the front Handle Declaration of Conformity
design of the thread of the connection screw	M4 5 000 50 % 50 % 50 FIT 10 a IP20 finger-safe, for vertical contact from the front
design of the thread of the connection screw	M4 5 000 50 % 50 % 50 FIT 10 a IP20 finger-safe, for vertical contact from the front
design of the thread of the connection screw	5 000 50 % 50 % 50 FIT 10 a
design of the thread of the connection screw	5 000 50 % 50 % 50 FIT 10 a
design of the thread of the connection screw	M4 5 000 50 % 50 % 50 FIT
design of the thread of the connection screw	5 000 50 % 50 %
design of the thread of the connection screw	5 000 50 % 50 %
design of the thread of the connection screw	5 000 50 %
design of the thread of the connection screw	M4 5 000
design of the thread of the connection screw	M4
design of the thread of the connection screw • for main contacts Safety related data B10 value	M4
design of the thread of the connection screw • for main contacts Safety related data	
design of the thread of the connection screw • for main contacts	
design of the thread of the connection screw • for main contacts	
·	Poziariv size 2
size of the screwdriver tip	Pozidriv size 2
	D :1: : 0
design of screwdriver shaft	Diameter 5 to 6 mm
for main contacts with screw-type terminals	2 2.5 N·m
tightening torque	
 for AWG cables for main contacts 	2x (16 12), 2x (14 8)
 finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
 solid or stranded 	2x (1 2.5 mm²), 2x (2.5 10 mm²)
• for main contacts	
type of connectable conductor cross-sections	
circuit	Top and solion
arrangement of electrical connectors for main current	Top and bottom
for main current circuit	screw-type terminals
type of electrical connection	
Connections/ Terminals	V IIIII
— forwards	0 mm
— at the side	30 mm
— backwards	0 mm
— upwards	50 mm
— downwards	50 mm
• for live parts at 690 V	
— forwards	0 mm
— at the side	30 mm
— backwards	0 mm
— upwards	50 mm
— downwards	50 mm
 for grounded parts at 690 V 	
— at the side	9 mm
— upwards	30 mm
— downwards	30 mm
• for live parts at 500 V	
— at the side	9 mm
— upwards	30 mm
— downwards	30 mm
 for grounded parts at 500 V 	
	9 mm
— upwards— at the side	



Confirmation









Test Certificates Marine / Shipping









Marine / Shipping

other

Railway





Confirmation



Confirmation

Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2321-1CC10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2321-1CC10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-1CC10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2321-1CC10&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-1CC10/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2321-1CC10&objecttype=14&gridview=view1

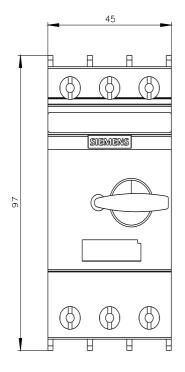

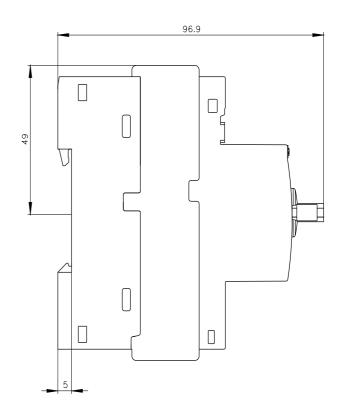

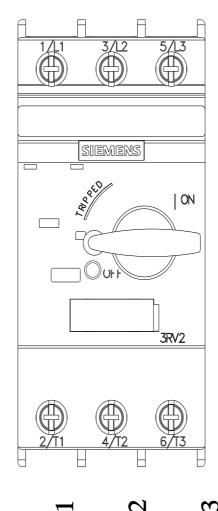

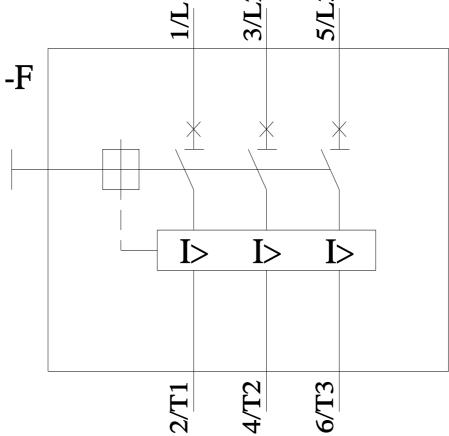

last modified: 11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV23211CC10