SIEMENS

Data sheet 3RV2321-1HC20



Circuit breaker size S0 for starter combination Rated current 8 A N-release 104 A Spring-type terminal Standard switching capacity

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For starter combinations
product type designation	3RV2
General technical data	
size of the circuit-breaker	SO
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	9.25 W
at AC in hot operating state per pole	3.1 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
of the main contacts typical	100 000
 of auxiliary contacts typical 	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
operating voltage	
·	20 690 V
operating voltage	
operating voltage • rated value	20 690 V
operating voltage • rated value • at AC-3 rated value maximum	20 690 V 690 V
operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum	20 690 V 690 V 690 V
operating voltage	20 690 V 690 V 690 V 50 60 Hz
operating voltage	20 690 V 690 V 690 V 50 60 Hz
operating voltage	20 690 V 690 V 690 V 50 60 Hz 8 A
operating voltage	20 690 V 690 V 690 V 50 60 Hz 8 A

— at 230 V rated value	1.5 kW
— at 400 V rated value	3 kW
— at 500 V rated value	4 kW
— at 690 V rated value	5.5 kW
• at AC-3e	
— at 230 V rated value	1.5 kW
— at 400 V rated value	3 kW
— at 500 V rated value	4 kW
— at 690 V rated value	5.5 kW
operating frequency	
at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
•	No
ground fault detection phase failure detection	
phase failure detection maximum short circuit current breaking capacity (lou)	No
maximum short-circuit current breaking capacity (Icu)	400 kA
at AC at 400 V rated value	100 kA
at AC at 500 V rated value	100 kA
at AC at 500 V rated value	42 kA
at AC at 690 V rated value	6 kA
operating short-circuit current breaking capacity (lcs) at AC	
• at 240 V rated value	100 kA
 at 400 V rated value 	100 kA
at 500 V rated value	42 kA
 at 690 V rated value 	4 kA
response value current of instantaneous short-circuit trip unit	104 A
UL/CSA ratings	104 A
	104 A
UL/CSA ratings	104 A 8 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	8 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	8 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp]	8 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor	8 A 8 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value	8 A 8 A 0.33 hp
ull/csA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value	8 A 8 A 0.33 hp
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor	8 A 8 A 0.33 hp 1 hp
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value	8 A 8 A 0.33 hp 1 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp The The state of the state o
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp 5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp Tyes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp 5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp 5 hp Tyes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm 97 mm
full-load current (FLA) for 3-phase AC motor	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp Tyes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value • for 3-phase AC motor — at 200/208 V rated value • at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm 97 mm 0 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 575/600 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp 5 hp 7 yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm 97 mm 0 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp 5 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm 97 mm 0 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 575/600 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards	8 A 8 A 0.33 hp 1 hp 2 hp 2 hp 5 hp 5 hp 5 hp Tyes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm 97 mm 0 mm 30 mm

— downwards— upwards— at the side• for grounded parts at 500 V	30 mm
— at the side	30 mm
	9 mm
• for grounded parts at 500 v	3 tilli
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
	9 111111
• for live parts at 500 V	20
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for grounded parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
for live parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	spring-loaded terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
for main contacts	
 solid or stranded 	2x (1 10 mm²)
 finely stranded with core end processing 	2x (1 6 mm²)
 finely stranded without core end processing 	2x (1 6 mm²)
 for AWG cables for main contacts 	2x (18 8)
design of screwdriver shaft	Diameter 3 mm
size of the screwdriver tip	3,0 x 0,5 mm
Safety related data	
B10 value	
 with high demand rate according to SN 31920 	5 000
proportion of dangerous failures	
with low demand rate according to SN 31920	50 %
with high demand rate according to SN 31920	50 %
failure rate [FIT]	
with low demand rate according to SN 31920	50 FIT
·	10 a
T1 value for proof test interval or service life according to IEC 61508	IP20
61508	finger-safe, for vertical contact from the front
protection class IP on the front according to IEC 60529	finger-safe, for vertical contact from the front Handle
protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529	-



Type Test Certificates/Test Report

Special Test Certificate







Marine / Shipping other Railway







Confirmation



Confirmation

Railway

Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2321-1HC20

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2321-1HC20}$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-1HC20


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2321-1HC20&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2321-1HC20&objecttype=14&gridview=view1

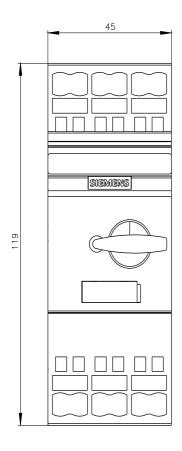

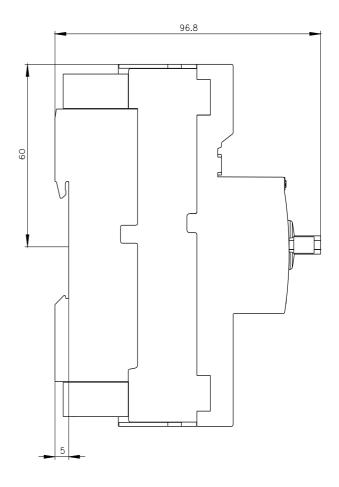

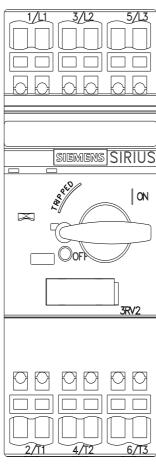

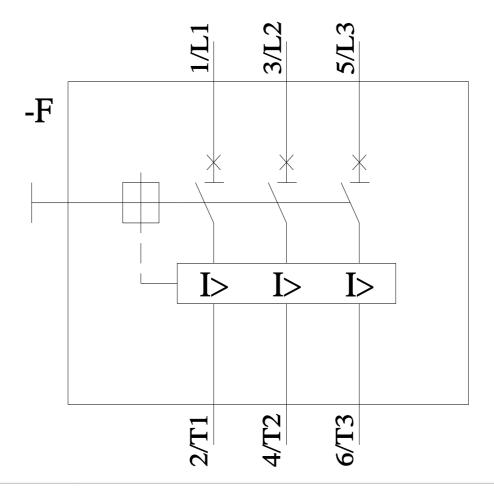

last modified: 11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV23211HC20