SIEMENS

Data sheet 3RV2321-1JC10



Circuit breaker size S0 for starter combination Rated current 10 A N release 130 A screw terminal Standard switching capacity

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For starter combinations
product type designation	3RV2
General technical data	
size of the circuit-breaker	S0
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	9.25 W
 at AC in hot operating state per pole 	3.1 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
 of auxiliary contacts typical 	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
installation altitude at height above sea level maximum ambient temperature	2 000 m
<u> </u>	2 000 m -20 +60 °C
ambient temperature	
ambient temperature ● during operation	-20 +60 °C
ambient temperatureduring operationduring storage	-20 +60 °C -50 +80 °C
ambient temperatureduring operationduring storageduring transport	-20 +60 °C -50 +80 °C -50 +80 °C
 ambient temperature during operation during storage during transport relative humidity during operation 	-20 +60 °C -50 +80 °C -50 +80 °C
ambient temperature	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 %
ambient temperature	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 %
ambient temperature	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 %
ambient temperature • during operation • during storage • during transport relative humidity during operation Main circuit number of poles for main current circuit operating voltage • rated value	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 %
ambient temperature • during operation • during storage • during transport relative humidity during operation Main circuit number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 %
ambient temperature • during operation • during storage • during transport relative humidity during operation Main circuit number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 % 3 20 690 V 690 V 690 V
ambient temperature • during operation • during storage • during transport relative humidity during operation Main circuit number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum operating frequency rated value	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 % 3 20 690 V 690 V 690 V 50 60 Hz
ambient temperature • during operation • during storage • during transport relative humidity during operation Main circuit number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum operating frequency rated value operational current rated value	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 % 3 20 690 V 690 V 690 V 50 60 Hz
ambient temperature • during operation • during storage • during transport relative humidity during operation Main circuit number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum operating frequency rated value operational current rated value operational current	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 % 3 20 690 V 690 V 690 V 50 60 Hz 10 A
ambient temperature • during operation • during storage • during transport relative humidity during operation Main circuit number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum operating frequency rated value operational current rated value operational current • at AC-3 at 400 V rated value	-20 +60 °C -50 +80 °C -50 +80 °C 10 95 % 3 20 690 V 690 V 690 V 50 60 Hz 10 A

— at 230 V rated value	2.2 kW
— at 400 V rated value	4 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	7.5 kW
• at AC-3e	
— at 230 V rated value	2.2 kW
— at 400 V rated value	4 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	7.5 kW
operating frequency	
at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	No
maximum short-circuit current breaking capacity (Icu)	.,,
at AC at 240 V rated value	100 kA
at AC at 400 V rated value	100 kA
at AC at 400 V rated value at AC at 500 V rated value	42 kA
at AC at 500 V rated value at AC at 690 V rated value	42 KA 6 kA
operating short-circuit current breaking capacity (lcs) at AC	U M
	100 kA
at 240 V rated value	
at 500 V rated value	100 kA
at 500 V rated value at 600 V rated value	42 kA
at 690 V rated value	4 kA
	400 4
response value current of instantaneous short-circuit trip unit	130 A
UL/CSA ratings	130 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	10 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp]	10 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor	10 A 10 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value	10 A 10 A 0.5 hp
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value	10 A 10 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor	10 A 10 A 0.5 hp 1.5 hp
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value	10 A 10 A 0.5 hp 1.5 hp
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp Yes magnetic any
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
full-load current (FLA) for 3-phase AC motor	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm
full-load current (FLA) for 3-phase AC motor	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value • at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V	10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards	10 A 10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards	10 A 10 A 10 A 0.5 hp 1.5 hp 2 hp 3 hp 5 hp 10 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm

2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2 M4 5 000 50 % 50 % 50 FIT 10 a
Diameter 5 to 6 mm Pozidriv size 2 M4 5 000 50 % 50 % 50 FIT
Diameter 5 to 6 mm Pozidriv size 2 M4 5 000 50 % 50 %
Diameter 5 to 6 mm Pozidriv size 2 M4 5 000
Diameter 5 to 6 mm Pozidriv size 2 M4 5 000
Diameter 5 to 6 mm Pozidriv size 2 M4 5 000
Diameter 5 to 6 mm Pozidriv size 2 M4
Diameter 5 to 6 mm Pozidriv size 2 M4
Diameter 5 to 6 mm Pozidriv size 2
Diameter 5 to 6 mm Pozidriv size 2
Diameter 5 to 6 mm Pozidriv size 2
Diameter 5 to 6 mm
Diameter 5 to 6 mm
2x (16 12), 2x (14 8)
2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
2x (1 2.5 mm²), 2x (2.5 10 mm²)
Top and bottom
screw-type terminals
0 mm
30 mm
0 mm
50 mm
50 mm
0 mm
30 mm
0 mm
50 mm
50 mm
311111
9 mm
30 mm
30 mm
9 111111
9 mm
30 mm
30 mm
9 mm
30 mm









Declaration of Conformity

Test Certificates

Marine / Shipping



Special Test Certific-

Type Test Certificates/Test Report







Marine / Shipping

other

Railway







Confirmation



Confirmation

Railway

Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2321-1JC10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2321-1JC10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-1JC10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2321-1JC10&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-1JC10/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2321-1JC10&objecttype=14&gridview=view1

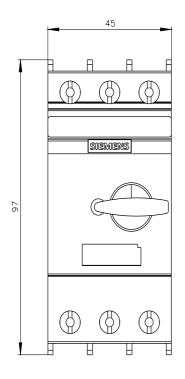

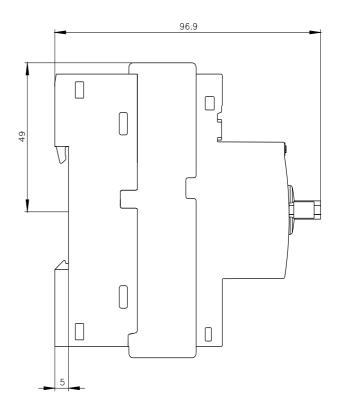

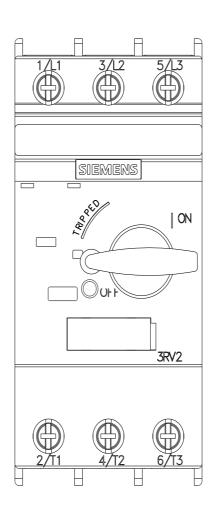

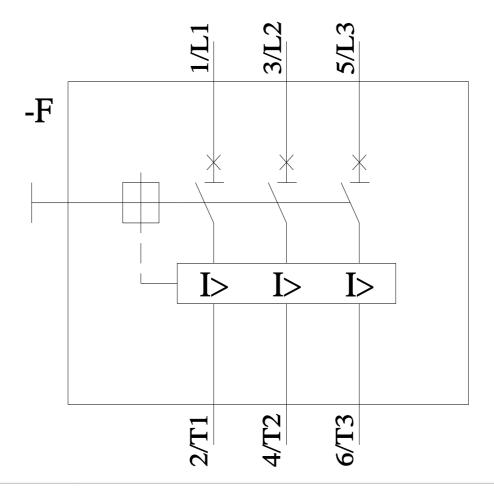

last modified: 11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV23211JC10