SIEMENS

Data sheet 3RV2321-4BC20



Circuit breaker size S0 for starter combination Rated current 20 A N-release 260 A Spring-type terminal Standard switching capacity

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For starter combinations
product type designation	3RV2
General technical data	
size of the circuit-breaker	S0
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	10.5 W
 at AC in hot operating state per pole 	3.5 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
 of auxiliary contacts typical 	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
operating voltage	
• rated value	20 690 V
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	20 A
operational current	
 at AC-3 at 400 V rated value 	20 A
at AC-3e at 400 V rated value	20 A
operating power	
• at AC-3	

— at 230 V rated value	5.5 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	11 kW
— at 690 V rated value	15 kW
• at AC-3e	
— at 230 V rated value	5.5 kW
— at 400 V rated value	7.5 kW
	11 kW
— at 500 V rated value	
— at 690 V rated value	15 kW
operating frequency	
at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
<u> </u>	No
phase failure detection	INU
maximum short-circuit current breaking capacity (Icu)	400.14
at AC at 240 V rated value	100 kA
 at AC at 400 V rated value 	55 kA
 at AC at 500 V rated value 	10 kA
at AC at 690 V rated value	4 kA
operating short-circuit current breaking capacity (lcs) at AC	
at 240 V rated value	100 kA
at 400 V rated value	25 kA
at 500 V rated value	5 kA
at 690 V rated value	2 kA
response value current of instantaneous short-circuit trin unit	260 A
response value current of instantaneous short-circuit trip unit	260 A
UL/CSA ratings	260 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	20 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp]	20 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	20 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp]	20 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor	20 A 20 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value	20 A 20 A 1.5 hp
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value	20 A 20 A 1.5 hp
ull-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor	20 A 20 A 1.5 hp 3 hp
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value	20 A 20 A 1.5 hp 3 hp 7.5 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A gL/gG 50 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	20 A 20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A gL/gG 50 A any
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A gL/gG 50 A gL/gG 50 A gL/gG 50 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A gL/gG 50 A gL/gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A gL/gG 50 A gL/gG 50 A gL/gG 50 M any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A gL/gG 50 A gL/gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A gL/gG 50 A gL/gG 50 A gL/gG 50 M any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	20 A 20 A 1.5 hp 3 hp 7.5 hp 5 hp 10 hp Yes magnetic gL/gG 63 A gL/gG 50 A gL/gG 50 A gL/gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 119 mm 45 mm 97 mm

— upwards	30 mm
— at the side	9 mm
• for live parts at 400 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for grounded parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 500 V	3 11111
— downwards	30 mm
	30 mm
— upwards	
— at the side	9 mm
• for grounded parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
onnections/ Terminals	
type of electrical connection	
for main current circuit	spring-loaded terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
for main contacts	
— solid or stranded	2x (1 10 mm²)
finely stranded with core end processing	2x (1 6 mm²)
— finely stranded without core end processing	2x (1 6 mm²)
• for AWG cables for main contacts	2x (18 8)
design of screwdriver shaft	Diameter 3 mm
size of the screwdriver tip	3,0 x 0,5 mm
afety related data	
B10 value	5.000
with high demand rate according to SN 31920	5 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	50 %
with high demand rate according to SN 31920	50 %
failure rate [FIT]	
 with low demand rate according to SN 31920 	50 FIT
T1 value for proof test interval or service life according to IEC 61508	10 a
protection class IP on the front according to IEC 60529	IP20
ouch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
display version for switching status	Handle
ertificates/ approvals	
General Product Approval	Declaration of Co

Declaration of Conformity

Test Certificates

Marine / Shipping



Special Test Certificate

Type Test Certificates/Test Report







Marine / Shipping

other

Railway







Confirmation



Vibration and Shock

Railway

Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2321-4BC20

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2321-4BC20

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-4BC20

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2321-4BC20&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-4BC20/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2321-4BC20&objecttype=14&gridview=view1

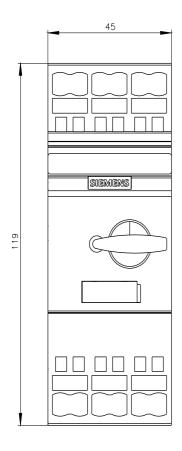

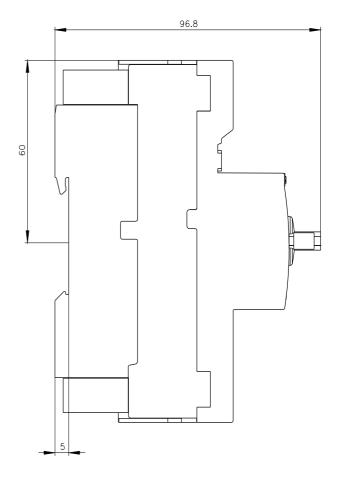

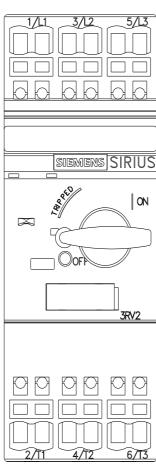

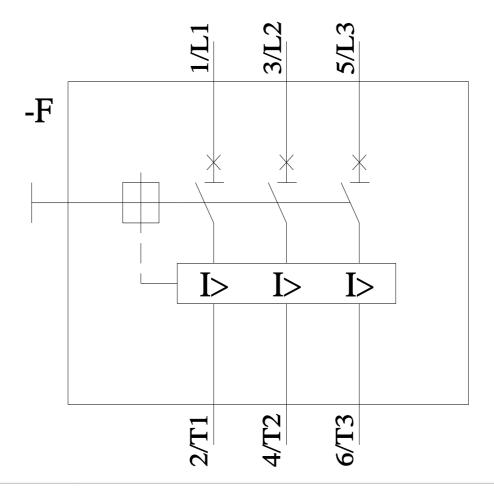

last modified: 11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV23214BC20