SIEMENS

Data sheet

3RV2711-1AD10



Circuit breaker size S00 for system protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 1.6 A N-release 21 A screw terminal Standard switching capacity

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For system protection according to UL 489/CSA C22.2 No. 5
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
at AC in hot operating state	7.25 W
at AC in hot operating state per pole	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)
mechanical service life (operating cycles)	
of the main contacts typical	100 000
 of auxiliary contacts typical 	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
operating voltage	
rated value	20 690 V
 at AC-3 rated value maximum 	690 V
 at AC-3e rated value maximum 	690 V
operating frequency rated value	50 60 Hz
operational current rated value	1.6 A
operational current	
	1.6 A
• at AC-3 at 400 V rated value	1.0 A
at AC-3 at 400 V rated valueat AC-3e at 400 V rated value	1.6 A
• at AC-3e at 400 V rated value	

— at 400 V rated value	0.6 kW
— at 500 V rated value	0.8 kW
— at 690 V rated value	1.1 kW
• at AC-3e	
— at 230 V rated value	0.3 kW
— at 400 V rated value	0.6 kW
— at 500 V rated value	0.8 kW
— at 690 V rated value	1.1 kW
operating frequency	
● at AC-3 maximum	15 1/h
● at AC-3e maximum	15 1/h
Protective and monitoring functions	
product function	
 ground fault detection 	No
 phase failure detection 	No
design of the overload release	thermal
maximum short-circuit current breaking capacity (lcu)	
• at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	100 kA
• at AC at 500 V rated value	100 kA
• at AC at 690 V rated value	100 kA
• at 480 AC Y/277 V according to UL 489 rated value	65 kA
operating short-circuit current breaking capacity (Ics) at AC	
• at 240 V rated value	100 kA
• at 400 V rated value	100 kA
• at 500 V rated value	100 kA
at 690 V rated value	100 kA
response value current of instantaneous short-circuit trip unit	21 A
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit protection of the main circuit	
● at 500 V	gG 20 A
• at 690 V	gG 16 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
fastening method height	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm
height	144 mm
height width depth required spacing	144 mm 45 mm
height width depth	144 mm 45 mm 97 mm
height width depth required spacing • for grounded parts at 400 V — downwards	144 mm 45 mm
height width depth required spacing • for grounded parts at 400 V	144 mm 45 mm 97 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	144 mm 45 mm 97 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards	144 mm 45 mm 97 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	144 mm 45 mm 97 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — upwards	144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side	144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V	144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards	144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — upwards — upwards	144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — upwards — at the side	144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — upwards — upwards — of the side • for live parts at 500 V	144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards	144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — upwards — upwards — upwards — upwards	144 mm 45 mm 97 mm 30 mm
height width depth required spacing • for grounded parts at 400 V - downwards - upwards - at the side • for live parts at 400 V - downwards - at the side • for grounded parts at 500 V - at the side • for grounded parts at 500 V - downwards - upwards - at the side • for live parts at 500 V - at the side • for live parts at 500 V - at the side • for live parts at 500 V - at the side • for live parts at 500 V - at the side • for live parts at 500 V - at the side	144 mm 45 mm 97 mm 30 mm
height width depth required spacing • for grounded parts at 400 V - downwards - upwards - at the side • for live parts at 400 V - downwards - at the side • for live parts at 400 V - downwards - upwards - at the side • for grounded parts at 500 V - downwards - upwards - at the side • for live parts at 500 V - at the side • for live parts at 500 V - at the side • for live parts at 500 V - at the side - at the side • for live parts at 500 V - at the side - at the side - at the side - at the side • for grounded parts at 690 V	144 mm 45 mm 97 mm 30 mm

ot the eide		0 m 30 r			
— at the side — forwards		0 m			
 for live parts at 690 V 		0 11	111		
- downwards		70 r	nm		
		701			
— upwards					
— backwards		0 m			
— at the side		30 r			
— forwards		0 m	m		
Connections/ Terminals		_			
type of electrical connection					
for main current circuit		SCR	ew-type terminals		
arrangement of electrical cor circuit	nnectors for main current	Тор	and bottom		
type of connectable conducted	or cross-sections				
 for main contacts 					
— solid or stranded		1	10 mm², max. 2x 10 mm²		
 finely stranded with 	o core end processing	1	16 mm², max. 6 + 16 mm²		
 for AWG cables for main 	contacts	2x (14 10)		
tightening torque					
 for main contacts with so 	crew-type terminals	2.5	3 N·m		
design of screwdriver shaft			meter 5 to 6 mm		
size of the screwdriver tip			idriv size 2		
design of the thread of the co	onnection screw				
for main contacts		M4			
Safety related data		IVIT			
B10 value		5.00	20		
with high demand rate according to the second		5 00	0		
proportion of dangerous failu			,		
 with low demand rate ac 	÷	50 9			
 with high demand rate ad 	ccording to SN 31920	50 9	/o		
failure rate [FIT]					
 with low demand rate according to SN 31920 		50 I	IT		
T1 value for proof test interval of 61508	or service life according to I	EC 10 a	1		
protection class IP on the front according to IEC 60529		IP2)		
protection class IP on the fro	nt according to IEC 60529				
protection class IP on the fro touch protection on the front	-		er-safe, for vertical contact fr	om the front	
-	according to IEC 60529			om the front	
touch protection on the front	according to IEC 60529	fing		om the front	
touch protection on the front display version for switching sta Certificates/ approvals	according to IEC 60529	fing		om the front	Declaration of Con-
touch protection on the front display version for switching sta	according to IEC 60529	fing		om the front	Declaration of Con- formity
touch protection on the front display version for switching sta Certificates/ approvals	according to IEC 60529	fing			
touch protection on the front display version for switching sta Certificates/ approvals General Product Approval	according to IEC 60529	fing	dle	om the front	formity
touch protection on the front display version for switching sta Certificates/ approvals General Product Approval	according to IEC 60529	fing	dle		
touch protection on the front display version for switching sta Certificates/ approvals General Product Approval	according to IEC 60529	fing	dle		formity
touch protection on the front display version for switching sta Certificates/ approvals General Product Approval Confirmation	according to IEC 60529 atus	fing	idle KC		formity CE EG-Konf.
touch protection on the front display version for switching sta Certificates/ approvals General Product Approval Confirmation	according to IEC 60529	fing	dle		formity
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity	according to IEC 60529 atus	fing	idle KC		formity CE EG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity	according to IEC 60529 atus	fing Har	idle KC		formity CE EG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity Test UK	according to IEC 60529 atus	fing Har	idle KC		formity CEG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity Test UK	according to IEC 60529 atus	fing Har	idle KC	EAC	formity CEG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity	according to IEC 60529 atus	fing Har	idle KC		formity CEG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity Test UK	according to IEC 60529 atus	fing Har	idle KC	EAC	formity CEG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity Test UKK Type ate	according to IEC 60529 atus Certificates e Test Certific- s/Test Report	fing Har	idle KC	EAC	formity CEG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity Test UK	according to IEC 60529 atus Certificates e Test Certific- s/Test Report	fing Har	idle KC	EAC	formity CEG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity Test UKCA Type ate other Raily	according to IEC 60529 atus Certificates e Test Certific- s/Test Report vay	fing Har	idle KC	EAC	formity CEG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity Test UKCA Type ate other Raily	according to IEC 60529 atus Certificates e Test Certific- s/Test Report	fing Har	idle KC	EAC	formity CEG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity Test UKCA Type ate other Raily	according to IEC 60529 atus Certificates e Test Certific- s/Test Report vay	fing Har	idle KC	EAC	formity CEG-Konf.
touch protection on the front display version for switching state Certificates/ approvals General Product Approval Confirmation Declaration of Conformity Test UKCA Type ate other Raily	according to IEC 60529 atus Certificates e Test Certific- s/Test Report vay	fing Har	idle KC	EAC	formity CEG-Konf.

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2711-1AD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2711-1AD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-1AD10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2711-1AD10&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-1AD10/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2711-1AD10&objecttype=14&gridview=view1

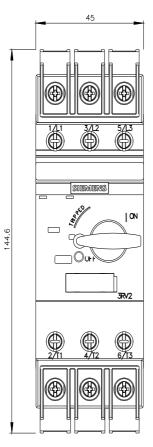

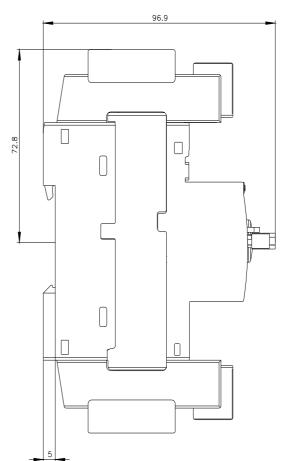

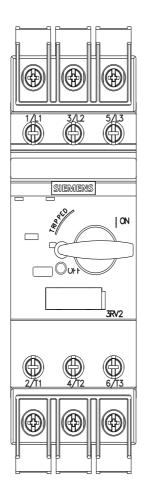

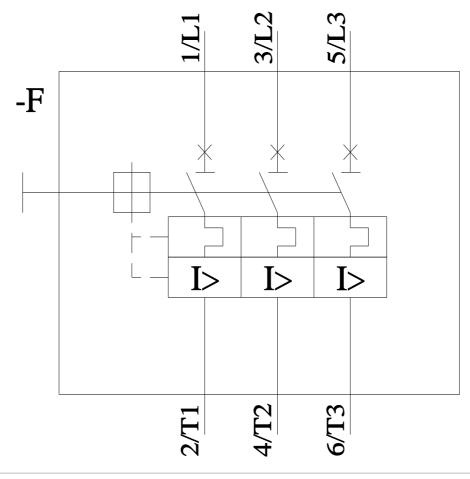

5/1/2023 🖸

Subject to change without notice © Copyright Siemens

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RV27111AD10