SIEMENS

Data sheet 3RV2811-0DD10



Circuit breaker size S00 for transformer protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 0.32 A N-release 6.5 A screw terminal Standard switching capacity

product brand name	SIRIUS		
product designation	Circuit breaker		
design of the product	For transformer protection according to UL 489/CSA C22.2 No.5		
product type designation	3RV2		
General technical data			
size of the circuit-breaker	S00		
product extension auxiliary switch	Yes		
power loss [W] for rated value of the current			
 at AC in hot operating state 	5.5 W		
 at AC in hot operating state per pole 	1.8 W		
insulation voltage with degree of pollution 3 at AC rated value	690 V		
surge voltage resistance rated value	6 kV		
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)		
mechanical service life (operating cycles)			
 of the main contacts typical 	100 000		
 of auxiliary contacts typical 	100 000		
electrical endurance (operating cycles) typical	100 000		
reference code according to IEC 81346-2	Q		
Substance Prohibitance (Date)	10/01/2009		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
 during operation 	-20 +60 °C		
 during storage 	-50 +80 °C		
during transport	-50 +80 °C		
relative humidity during operation	10 95 %		
Main circuit			
number of poles for main current circuit	3		
operating voltage			
• rated value	20 690 V		
 at AC-3 rated value maximum 	690 V		
at AC-3e rated value maximum	690 V		
operating frequency rated value	50 60 Hz		
operational current rated value	0.32 A		
operational current			
 at AC-3 at 400 V rated value 	0.32 A		
• at AC-3e at 400 V rated value	0.32 A		
operating power			
• at AC-3			
— at 230 V rated value	0 kW		

— at 400 V rated value — at 500 V rated value — at 690 V rated value • at AC-3e — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value • at AC-3 maximum 15 1/h			
— at 690 V rated value ■ at AC-3e — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value — at 690 V rated value operating frequency ■ at AC-3 maximum 0.1 kW 0.1 kW			
 at AC-3e at 230 V rated value at 400 V rated value 10.1 kW at 500 V rated value at 690 V rated value operating frequency at AC-3 maximum 15 1/h 			
— at 230 V rated value 0 kW — at 400 V rated value 0.1 kW — at 500 V rated value 0.1 kW — at 690 V rated value 0.1 kW operating frequency at AC-3 maximum 15 1/h			
— at 400 V rated value 0.1 kW — at 500 V rated value 0.1 kW — at 690 V rated value 0.1 kW operating frequency ■ at AC-3 maximum 15 1/h			
— at 500 V rated value 0.1 kW — at 690 V rated value 0.1 kW operating frequency ■ at AC-3 maximum 15 1/h			
— at 690 V rated value 0.1 kW operating frequency ● at AC-3 maximum 15 1/h	0.1 kW		
operating frequency ● at AC-3 maximum 15 1/h	0.1 kW		
• at AC-3 maximum 15 1/h			
at AC-3e maximum			
□ ut AO-oc maximum □ 1/II			
Protective and monitoring functions			
product function			
ground fault detection No			
phase failure detection No			
design of the overload release thermal			
maximum short-circuit current breaking capacity (Icu)			
at AC at 240 V rated value 100 kA			
• at AC at 400 V rated value 100 kA			
• at AC at 500 V rated value 100 kA			
• at AC at 690 V rated value 100 kA			
• at 480 AC Y/277 V according to UL 489 rated value 65 kA			
operating short-circuit current breaking capacity (Ics) at AC			
• at 240 V rated value			
• at 400 V rated value 100 kA			
• at 500 V rated value 100 kA			
at 690 V rated value at 690 V rated value			
response value current of instantaneous short-circuit trip unit 6.5 A			
Short-circuit protection			
product function short circuit protection Yes			
design of the short-circuit trip magnetic			
Installation/ mounting/ dimensions			
mounting position any			
	ting onto 35 mm DIN rail according to DIN EN 60715		
height 144 mm	and one of this birtial according to birt birt of to		
width 45 mm			
width 45 mm			
depth 97 mm			
depth 97 mm required spacing			
depth 97 mm required spacing ● for grounded parts at 400 V			
depth 97 mm required spacing ● for grounded parts at 400 V — downwards 30 mm			
depth 97 mm required spacing ● for grounded parts at 400 V — downwards 30 mm — upwards 30 mm			
depth 97 mm required spacing 97 mm ● for grounded parts at 400 V 30 mm — downwards 30 mm — upwards 30 mm — at the side 30 mm			
depth 97 mm required spacing • for grounded parts at 400 V — downwards 30 mm — upwards 30 mm — at the side 30 mm • for live parts at 400 V			
depth 97 mm required spacing • for grounded parts at 400 V			
depth required spacing ● for grounded parts at 400 V — downwards — upwards — at the side ● for live parts at 400 V — downwards — upwards 30 mm ● for live parts at 400 V — downwards — upwards 30 mm			
depth 97 mm required spacing 97 mm ● for grounded parts at 400 V 30 mm — upwards 30 mm — at the side 30 mm ● for live parts at 400 V 30 mm — downwards 30 mm — upwards 30 mm — at the side 30 mm			
depth 97 mm required spacing • for grounded parts at 400 V			
depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards • for grounded parts at 500 V — downwards 30 mm • for grounded parts at 500 V — downwards 30 mm			
depth required spacing ● for grounded parts at 400 V — downwards — upwards — at the side ● for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — upwards — of the side ● for grounded parts at 500 V — downwards — upwards — at the side ● for grounded parts at 500 V — downwards — upwards			
depth required spacing ● for grounded parts at 400 V — downwards — upwards — at the side ● for live parts at 400 V — downwards — upwards — upwards — upwards — at the side ● for grounded parts at 500 V — downwards — upwards — at the side ● for grounded parts at 500 V — downwards — upwards — at the side 30 mm 30 mm ■ for grounded parts at 500 V — downwards — upwards — at the side 30 mm			
depth 97 mm required spacing • for grounded parts at 400 V			
depth 97 mm required spacing 97 mm • for grounded parts at 400 V 30 mm — upwards 30 mm — at the side 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — at the side 30 mm • for live parts at 500 V 30 mm — downwards 30 mm • for live parts at 500 V 30 mm — downwards 30 mm			
depth 97 mm required spacing • for grounded parts at 400 V — downwards 30 mm — upwards 30 mm — at the side 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — at the side 30 mm • for live parts at 500 V 30 mm — downwards 30 mm — of or live parts at 500 V 30 mm — upwards 30 mm — upwards 30 mm			
depth 97 mm required spacing ● for grounded parts at 400 V 30 mm — upwards 30 mm — at the side 30 mm ● for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm ● for grounded parts at 500 V 30 mm — at the side 30 mm ● for live parts at 500 V 30 mm — downwards 30 mm — upwards 30 mm — upwards 30 mm — at the side 30 mm — at the side 30 mm			
depth97 mmrequired spacing• for grounded parts at 400 V— downwards30 mm— upwards30 mm— at the side30 mm• for live parts at 400 V30 mm— downwards30 mm— upwards30 mm— at the side30 mm• for grounded parts at 500 V30 mm— at the side30 mm• for live parts at 500 V30 mm— downwards30 mm• for live parts at 500 V30 mm— downwards30 mm— at the side30 mm• for grounded parts at 690 V30 mm			
depth 97 mm required spacing 30 mm • for grounded parts at 400 V 30 mm — upwards 30 mm — at the side 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — at the side 30 mm • for live parts at 500 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 690 V 70 mm			
depth 97 mm required spacing • for grounded parts at 400 V — downwards 30 mm — upwards 30 mm — at the side 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — at the side 30 mm • for live parts at 500 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 690 V 70 mm — downwards 70 mm — upwards 70 mm			
depth97 mmrequired spacing• for grounded parts at 400 V30 mm— downwards30 mm— upwards30 mm— at the side30 mm• for live parts at 400 V30 mm— downwards30 mm— upwards30 mm• for grounded parts at 500 V30 mm— downwards30 mm— at the side30 mm• for live parts at 500 V30 mm— downwards30 mm— at the side30 mm• for grounded parts at 690 V30 mm— downwards70 mm— upwards70 mm— upwards70 mm— upwards70 mm— backwards0 mm			
depth 97 mm required spacing • for grounded parts at 400 V — downwards 30 mm — upwards 30 mm — at the side 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — at the side 30 mm • for live parts at 500 V 30 mm — at the side 30 mm • for grounded parts at 690 V 30 mm — downwards 70 mm • for grounded parts at 690 V 70 mm — upwards 70 mm			

• for live parts at 690 V		
— downwards	70 mm	
— upwards	70 mm	
— backwards	0 mm	
— at the side	30 mm	
— forwards	0 mm	
Connections/ Terminals		
type of electrical connection		
• for main current circuit	screw-type terminals	
arrangement of electrical connectors for main current circuit	Top and bottom	
type of connectable conductor cross-sections		
 for main contacts 		
 solid or stranded 	1 10 mm², max. 2x 10 mm²	
 finely stranded with core end processing 	1 16 mm², max. 6 + 16 mm²	
for AWG cables for main contacts	2x (14 10)	
tightening torque		
for main contacts with screw-type terminals	2.5 3 N·m	
design of screwdriver shaft	Diameter 5 to 6 mm	
size of the screwdriver tip	Pozidriv size 2	
design of the thread of the connection screw		
• for main contacts	M4	
Safety related data		
B10 value		
with high demand rate according to SN 31920	5 000	
proportion of dangerous failures		
 with low demand rate according to SN 31920 	50 %	
with high demand rate according to SN 31920	50 %	
failure rate [FIT]		
 with low demand rate according to SN 31920 	50 FIT	
T1 value for proof test interval or service life according to IEC 61508	10 a	
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
display version for switching status	Handle	
Certificates/ approvals		
General Product Approval		Declaration of Con-

eneral Product Approval

formity

Confirmation





<u>KC</u>





Declaration of Conformity

Test Certificates

Marine / Shipping

other

Special Test Certific-<u>ate</u>

Type Test Certificates/Test Report





Confirmation

other

Railway



Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2811-0DD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2811-0DD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-0DD10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2811-0DD10&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-0DD10/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2811-0DD10&objecttype=14&gridview=view1

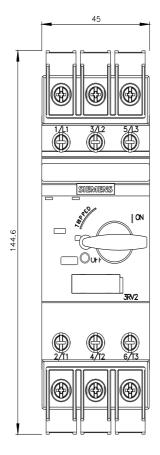

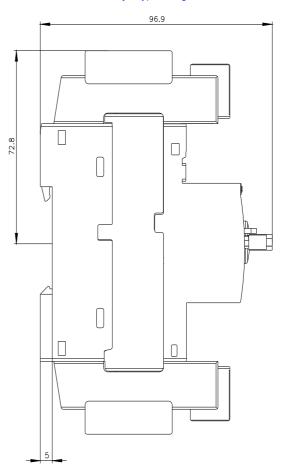

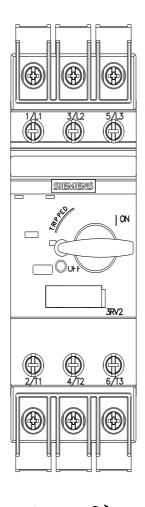

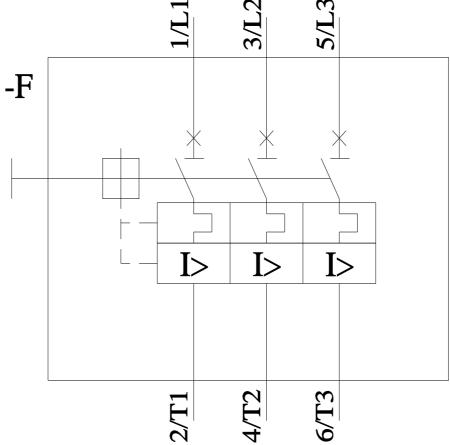

last modified: 5/1/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV28110DD10