SIEMENS

Data sheet

3RV2811-1CD10



Circuit breaker size S00 for transformer protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 2.5 A N release 52 A screw terminal Standard switching capacity

product brand name	SIRIUS			
product designation	Circuit breaker			
design of the product				
product type designation	For transformer protection according to UL 489/CSA C22.2 No.5 3RV2			
General technical data				
size of the circuit-breaker	S00			
product extension auxiliary switch	Yes			
power loss [W] for rated value of the current				
at AC in hot operating state	7.25 W			
at AC in hot operating state per pole	7.25 W 2.4 W			
insulation voltage with degree of pollution 3 at AC rated value	2.4 W			
surge voltage resistance rated value	6 kV			
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)			
mechanical service life (operating cycles)				
of the main contacts typical	100 000			
of auxiliary contacts typical	100 000			
electrical endurance (operating cycles) typical	100 000			
reference code according to IEC 81346-2	Q			
Substance Prohibitance (Date)	10/01/2009			
Ambient conditions				
installation altitude at height above sea level maximum	2 000 m			
ambient temperature				
 during operation 	-20 +60 °C			
during storage	-50 +80 °C			
during transport	-50 +80 °C			
relative humidity during operation	10 95 %			
Main circuit				
number of poles for main current circuit	3			
operating voltage				
rated value	20 690 V			
 at AC-3 rated value maximum 	690 V			
 at AC-3e rated value maximum 	690 V			
operating frequency rated value	50 60 Hz			
operational current rated value	2.5 A			
operational current				
• at AC-3 at 400 V rated value	2.5 A			
• at AC-3e at 400 V rated value	2.5 A			
operating power				
• at AC-3				
— at 230 V rated value	0.4 kW			

— at 400 V rated value	0.8 kW
— at 500 V rated value	1.1 kW
— at 690 V rated value	1.5 kW
• at AC-3e	
— at 230 V rated value	0.4 kW
— at 400 V rated value	0.8 kW
— at 500 V rated value	1.1 kW
— at 690 V rated value	1.5 kW
operating frequency	
• at AC-3 maximum	15 1/h
● at AC-3e maximum	15 1/h
Protective and monitoring functions	
product function	
 ground fault detection 	No
 phase failure detection 	No
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	
at AC at 240 V rated value	100 kA
at AC at 400 V rated value	100 kA
at AC at 500 V rated value	100 kA
at AC at 690 V rated value	100 KA
 at 480 AC Y/277 V according to UL 489 rated value 	65 kA
operating short-circuit current breaking capacity (Ics) at AC	
at 240 V rated value	100 kA
	100 kA
at 400 V rated value	
• at 500 V rated value	100 kA
at 690 V rated value	10 kA
response value current of instantaneous short-circuit trip unit	52 A
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	magnetic
design of the fuse link for IT network for short-circuit	magnetic gG 25 A
design of the fuse link for IT network for short-circuit protection of the main circuit	
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V	gG 25 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V	gG 25 A gG 25 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V	gG 25 A gG 25 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	gG 25 A gG 25 A gG 20 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	gG 25 A gG 25 A gG 20 A any
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — at the side	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for grounded parts at 500 V	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V	gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit e at 400 V e at 500 V e at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 97 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — upwards — at the side • for live parts at 500 V — downwards — upwards — upwards	gG 25 A gG 25 A gG 20 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 97 mm 30 mm

UK CA	Type Test Certific- ates/Test Report	Special Test Certif	<u>ic-</u>		Lloyds	Confirmation	
Declaration of Con formity	Test Certificates		Marine / S	Shipping		other	
	ccc	UL				EG-Konf.	
Confirmation		ભ	K	<u>.C</u>	EHC	CE	
General Product Approv	al					Declaration of Con- formity	
Certificates/ approvals							
display version for switchin	ng status	}	Handle				
touch protection on the f	front according to IEC	60529 f	finger-safe, for vertical contact from the front				
protection class IP on th	e front according to I	EC 60529	P20				
T1 value for proof test inte 61508	rval or service life acco	ording to IEC	10 a				
 with low demand rate 	te according to SN 319	20	50 FIT				
failure rate [FIT]							
 with high demand rate 	ate according to SN 319	920	50 %				
 with low demand rate 	te according to SN 319	20	50 %				
proportion of dangerous	failures						
 with high demand rate 	ate according to SN 319	920 !	5 000				
B10 value							
Safety related data							
 for main contacts 			<i>M</i> 4				
design of the thread of th	ne connection screw						
size of the screwdriver ti	р	1	Pozidriv size 2				
design of screwdriver sh	aft	ſ	Diameter 5 to 6 mm				
 for main contacts with the second seco	ith screw-type terminals	s :	2.5 3 N·m				
tightening torque							
 for AWG cables for 	main contacts		2x (14 10)				
— finely stranded	I with core end process	sing	I 16 mm², max.	. 6 + 16 mm²			
— solid or strand	ed	· · · · · · · · · · · · · · · · · · ·	I 10 mm², max.	. 2x 10 mm²			
for main contacts							
type of connectable cond	ductor cross-sections	3					
arrangement of electrica circuit	I connectors for main	current	Fop and bottom				
for main current circ			crew-type termina	als			
type of electrical connec	tion						
Connections/ Terminals		_					
— forwards		(0 mm				
— at the side		÷	30 mm				
- backwards		() mm				
— upwards			70 mm				
- downwards			70 mm				
 for live parts at 690 	V						
— forwards		(0 mm				
— at the side			30 mm				
— upwards — backwards		(70 mm 0 mm				





Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10 Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2811-1CD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2811-1CD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-1CD10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2811-1CD10&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-1CD10/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2811-1CD10&objecttype=14&gridview=view1

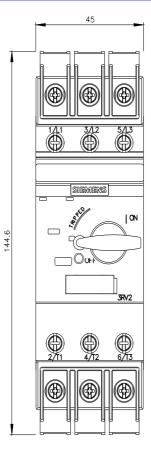

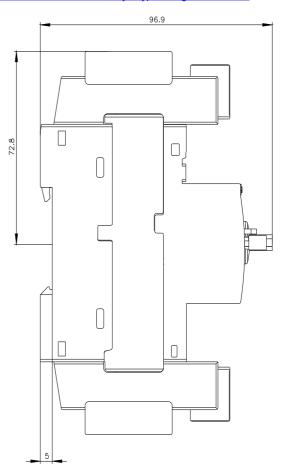

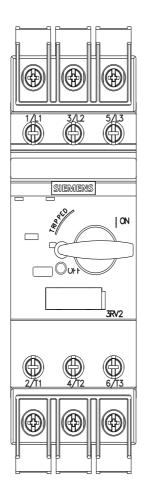

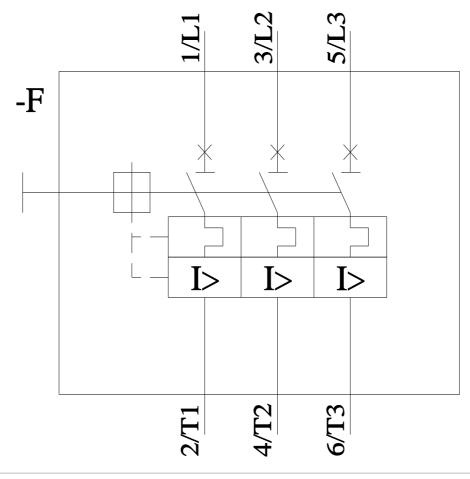

5/1/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RV28111CD10