SIEMENS

Data sheet 3RV2811-1HD10



Circuit breaker size S00 for transformer protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 8 A N-release 163 A screw terminal Standard switching capacity

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For transformer protection according to UL 489/CSA C22.2 No.5
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	9.25 W
 at AC in hot operating state per pole 	3.1 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
 of auxiliary contacts typical 	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
operating voltage	
rated value	20 690 V
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	8 A
operational current	
 at AC-3 at 400 V rated value 	8 A
at AC-3e at 400 V rated value	8 A
operating power	
• at AC-3	
— at 230 V rated value	1.5 kW

 — at 400 V rated value — at 500 V rated value — at 690 V rated value 5.5 kW • at AC-3e — at 230 V rated value — at 400 V rated value 3 kW 	
 — at 690 V rated value 5.5 kW ■ at AC-3e — at 230 V rated value 1.5 kW 	
● at AC-3e — at 230 V rated value 1.5 kW	
— at 230 V rated value 1.5 kW	
— at 400 V rated value 3 kW	
— at 500 V rated value 4 kW	
— at 690 V rated value 5.5 kW	
operating frequency	
• at AC-3 maximum 15 1/h	
• at AC-3e maximum 15 1/h	
Protective and monitoring functions	
product function	
ground fault detection No	
• phase failure detection No	
design of the overload release thermal	
maximum short-circuit current breaking capacity (Icu)	
at AC at 240 V rated value 100 kA	
• at AC at 400 V rated value 100 kA	
• at AC at 500 V rated value 42 kA	
at 480 AC Y/277 V according to UL 489 rated value 65 kA According about significant breaking consolity (lea) at ACcording to the significant breaking consolit	
operating short-circuit current breaking capacity (Ics) at AC	
at 240 V rated value 100 kA	
• at 400 V rated value 100 kA	
• at 500 V rated value 42 kA	
at 690 V rated value 4 kA	
response value current of instantaneous short-circuit trip unit 163 A	
Short-circuit protection	
product function short circuit protection Yes	
design of the short-circuit trip magnetic	
design of the fuse link for IT network for short-circuit protection of the main circuit	
• at 400 V gG 50 A	
• at 500 V gG 40 A	
• at 690 V gG 35 A	
Installation/ mounting/ dimensions	
mounting position any	
	5 mm DIN rail according to DIN FN 60715
fastening method screw and snap-on mounting onto 35	7 11111 211 1 1 an according to 2111 211 cor 10
fastening methodscrew and snap-on mounting onto 35height144 mm	7 2
height 144 mm	
height144 mmwidth45 mm	
height 144 mm width 45 mm depth 97 mm	
height 144 mm width 45 mm depth 97 mm required spacing	
height 144 mm width 45 mm depth 97 mm required spacing ● for grounded parts at 400 V	
height 144 mm width 45 mm depth 97 mm required spacing - for grounded parts at 400 V — downwards 30 mm	
height 144 mm width 45 mm depth 97 mm required spacing • for grounded parts at 400 V — downwards 30 mm — upwards 30 mm — at the side 30 mm	
height width 45 mm depth 97 mm required spacing • for grounded parts at 400 V — downwards — upwards — upwards — at the side • for live parts at 400 V	
height 144 mm width 45 mm depth 97 mm required spacing ● for grounded parts at 400 V 30 mm — upwards 30 mm — at the side 30 mm ● for live parts at 400 V 30 mm — downwards 30 mm	
height 144 mm width 45 mm depth 97 mm required spacing • for grounded parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — upwards 30 mm	
height 144 mm width 45 mm depth 97 mm required spacing 30 mm • for grounded parts at 400 V 30 mm — upwards 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — upwards 30 mm — at the side 30 mm	
height width 45 mm depth 97 mm required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — of the side • for grounded parts at 500 V	
height 144 mm width 45 mm depth 97 mm required spacing 97 mm ● for grounded parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm ● for live parts at 400 V 30 mm — downwards 30 mm — upwards 30 mm — at the side 30 mm ● for grounded parts at 500 V 30 mm — downwards 30 mm	
height 144 mm width 45 mm depth 97 mm required spacing • for grounded parts at 400 V 30 mm — upwards 30 mm — at the side 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — downwards 30 mm — upwards 30 mm	
height 144 mm width 45 mm depth 97 mm required spacing 97 mm • for grounded parts at 400 V 30 mm — upwards 30 mm — at the side 30 mm — of or live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — downwards 30 mm — upwards 30 mm — at the side 30 mm	
height 144 mm width 45 mm depth 97 mm required spacing 30 mm • for grounded parts at 400 V 30 mm — upwards 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — upwards 30 mm — upwards 30 mm — at the side 30 mm • for live parts at 500 V 30 mm	
height 144 mm width 45 mm depth 97 mm required spacing 97 mm • for grounded parts at 400 V 30 mm — at the side 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — at the side 30 mm • for live parts at 500 V 30 mm • for live parts at 500 V 30 mm • for live parts at 500 V 30 mm • for live parts at 500 V 30 mm	
height 144 mm width 45 mm depth 97 mm required spacing 97 mm • for grounded parts at 400 V 30 mm — upwards 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — downwards 30 mm — at the side 30 mm • for live parts at 500 V 30 mm — downwards 30 mm • for live parts at 500 V 30 mm — upwards 30 mm • for live parts at 500 V 30 mm — upwards 30 mm	
height 144 mm width 45 mm depth 97 mm required spacing 97 mm • for grounded parts at 400 V 30 mm — upwards 30 mm — at the side 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — at the side 30 mm • for live parts at 500 V 30 mm — at the side 30 mm • for live parts at 500 V 30 mm — downwards 30 mm — upwards 30 mm — at the side 30 mm	
height 144 mm width 45 mm depth 97 mm required spacing 97 mm • for grounded parts at 400 V 30 mm — upwards 30 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 30 mm • for grounded parts at 500 V 30 mm — downwards 30 mm — at the side 30 mm • for live parts at 500 V 30 mm — downwards 30 mm • for live parts at 500 V 30 mm — upwards 30 mm • for live parts at 500 V 30 mm — upwards 30 mm	

— upwards 70 m — backwards 0 mm — at the side 30 m — forwards 0 mm • for live parts at 690 V — downwards 70 m — upwards 70 m — backwards 0 mm — at the side 30 m — forwards 0 mm Connections/ Terminals	m nm m nm nm nm nm
— at the side — forwards • for live parts at 690 V — downwards — upwards — backwards — at the side — forwards — forwards — to mr Connections/ Terminals	nm m nm nm m
— forwards 0 mm ● for live parts at 690 V 70 m — downwards 70 m — upwards 70 m — backwards 0 mm — at the side 30 m — forwards 0 mm Connections/ Terminals	m nm nm m nm
● for live parts at 690 V — downwards — upwards — backwards — at the side — forwards 0 mm Connections/ Terminals	nm nm m
— downwards 70 m — upwards 70 m — backwards 0 mr — at the side 30 m — forwards 0 mr Connections/ Terminals	nm m nm
— upwards 70 m — backwards 0 mm — at the side 30 m — forwards 0 mm Connections/ Terminals	nm m nm
— backwards 0 mr — at the side 30 m — forwards 0 mr Connections/ Terminals	m nm
— at the side 30 m — forwards 0 mm Connections/ Terminals	nm
— forwards 0 mr	
Connections/ Terminals	
	""
tuma of alastuical compaction	
type of electrical connection	
	ew-type terminals
arrangement of electrical connectors for main current circuit	and bottom
type of connectable conductor cross-sections	
• for main contacts	
— solid or stranded 1	10 mm², max. 2x 10 mm²
— finely stranded with core end processing 1	16 mm², max. 6 + 16 mm²
• for AWG cables for main contacts 2x (14 10)
tightening torque	
• for main contacts with screw-type terminals 2.5 .	3 N·m
design of screwdriver shaft Dian	meter 5 to 6 mm
size of the screwdriver tip Pozi	idriv size 2
design of the thread of the connection screw	
• for main contacts M4	
afety related data	
B10 value	
• with high demand rate according to SN 31920 5 00	00
proportion of dangerous failures	
 with low demand rate according to SN 31920 	%
 with high demand rate according to SN 31920 	%
failure rate [FIT]	
• with low demand rate according to SN 31920 50 F	FIT
T1 value for proof test interval or service life according to IEC 10 a 61508	a
protection class IP on the front according to IEC 60529 IP20	0
touch protection on the front according to IEC 60529 finge	er-safe, for vertical contact from the front
display version for switching status Han	ndle
Certificates/ approvals	
General Product Approval	Declaration of Conformity

ccc

LIIL



Declaration of Conformity **Test Certificates** Marine / Shipping

other

Special Test Certific-<u>ate</u>

Type Test Certificates/Test Report





Confirmation

other Railway



Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2811-1HD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2811-1HD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-1HD10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2811-1HD10&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-1HD10/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2811-1HD10&objecttype=14&gridview=view1

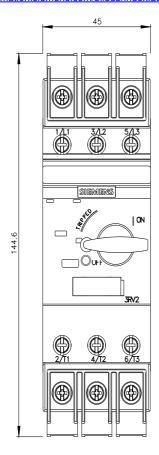

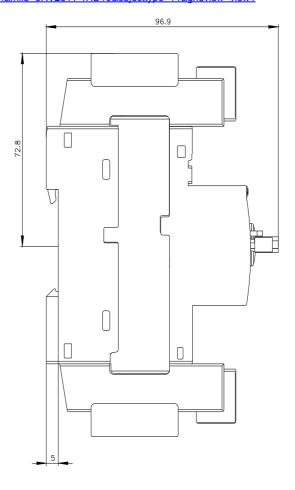

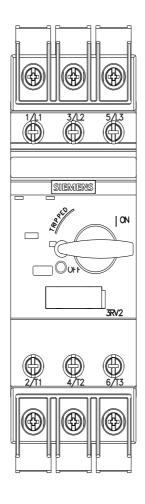

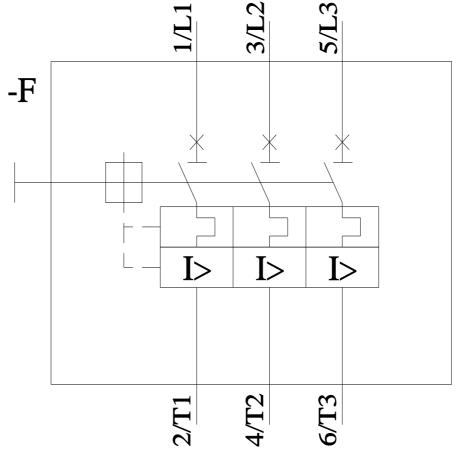

last modified: 5/1/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV28111HD10