# **SIEMENS**

Data sheet 3RW5055-2TB15



SIRIUS soft starter 200-600 V 143 A, 110-250 V AC Spring-loaded terminals Thermistor input

Figure similar

product brand name	SIRIUS	
product category	Hybrid switching devices	
product designation	Soft starter	
product type designation	3RW50	
manufacturer's article number		
<ul> <li>of standard HMI module usable</li> </ul>	3RW5980-0HS01	
<ul> <li>of high feature HMI module usable</li> </ul>	3RW5980-0HF00	
<ul> <li>of communication module PROFINET standard usable</li> </ul>	3RW5980-0CS00	
<ul> <li>of communication module PROFIBUS usable</li> </ul>	3RW5980-0CP00	
<ul> <li>of communication module Modbus TCP usable</li> </ul>	3RW5980-0CT00	
<ul> <li>of communication module Modbus RTU usable</li> </ul>	3RW5980-0CR00	
<ul> <li>of communication module Ethernet/IP</li> </ul>	3RW5980-0CE00	
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2220-7MN32-0AA0; Type of assignment 1, Iq = 20 kA	
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2220-7MN32-0AA0; Type of assignment 1, Iq = 20 kA	
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	3NA3244-6; Type of coordination 1, Iq = 65 kA	
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE1 227-0: Type of coordination 2, Iq = 65 kA	
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE3 334 -0B: Type of coordination 2. Iq = 65 kA	
<ul> <li>of line contactor usable up to 480 V</li> </ul>	<u>3RT1055</u>	
<ul> <li>of line contactor usable up to 690 V</li> </ul>	<u>3RT1055</u>	
eneral technical data		
starting voltage [%]	30 100 %	
stopping voltage [%]	50 %; non-adjustable	
start-up ramp time of soft starter	0 20 s	
ramp-down time of soft starter	0 20 s	
current limiting value [%] adjustable	130 700 %	
certificate of suitability		
● CE marking	Yes	
UL approval	Yes	
CSA approval	Yes	
product component		
HMI-High Feature	No	
is supported HMI-Standard	Yes	
is supported HMI-High Feature	Yes	
product feature integrated bypass contact system	Yes	
number of controlled phases	2	
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2	
buffering time in the event of power failure		
for main current circuit	100 ms	

e for control circuit	100 mg		
• for control circuit	100 ms		
insulation voltage rated value	600 V		
degree of pollution	3, acc. to IEC 60947-4-2		
impulse voltage rated value	6 kV		
blocking voltage of the thyristor maximum	1 800 V		
service factor	1		
surge voltage resistance rated value	6 kV		
maximum permissible voltage for protective separation	2001		
between main and auxiliary circuit	600 V		
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting		
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz		
utilization category according to IEC 60947-4-2	AC-53a		
reference code according to IEC 81346-2	Q		
Substance Prohibitance (Date)	09/23/2019		
product function	V.		
• ramp-up (soft starting)	Yes		
• ramp-down (soft stop)	Yes		
Soft Torque	Yes		
adjustable current limitation	Yes		
pump ramp down	Yes		
intrinsic device protection	Yes		
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)		
evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick		
• auto-RESET	Yes		
• manual RESET	Yes		
• remote reset	Yes; By turning off the control supply voltage		
communication function	Yes		
operating measured value display	Yes; Only in conjunction with special accessories		
• error logbook	Yes; Only in conjunction with special accessories		
via software parameterizable	No		
• via software configurable	Yes		
PROFlenergy	Yes; in connection with the PROFINET Standard communication module		
voltage ramp	Yes		
• torque control	No No		
analog output	No		
Power Electronics			
operational current	440.4		
• at 40 °C rated value	143 A		
• at 50 °C rated value	128 A		
at 60 °C rated value	118 A		
operating voltage	000 000 //		
• rated value	200 600 V		
relative negative tolerance of the operating voltage	-15 % -10 %		
relative positive tolerance of the operating voltage	10 %		
operating power for 3-phase motors	37 WW		
<ul> <li>at 230 V at 40 °C rated value</li> <li>at 400 V at 40 °C rated value</li> </ul>	37 kW 75 kW		
	75 KW 90 kW		
at 500 V at 40 °C rated value  Operating frequency 1 rated value	90 KW 50 Hz		
Operating frequency 1 rated value  Operating frequency 2 rated value	60 Hz		
relative negative tolerance of the operating frequency	-10 %		
relative negative tolerance of the operating frequency	10 %		
adjustable motor current			
at rotary coding switch on switch position 1	68 A		
at rotary coding switch on switch position 1     at rotary coding switch on switch position 2	73 A		
at rotary coding switch on switch position 2     at rotary coding switch on switch position 3	73 A		
	83 A		
at rotary coding switch on switch position 4     at rotary coding switch on switch position 5	83 A 88 A		
at rotary coding switch on switch position 5     at rotary coding switch on switch position 6	88 A 93 A		
at rotary coding switch on switch position 6	93 A 98 A		
<ul> <li>at rotary coding switch on switch position 7</li> </ul>			

<ul> <li>at rotary coding switch on switch position 8</li> </ul>	103 A		
<ul> <li>at rotary coding switch on switch position 9</li> </ul>	108 A		
<ul> <li>at rotary coding switch on switch position 10</li> </ul>	113 A		
<ul> <li>at rotary coding switch on switch position 11</li> </ul>	118 A		
<ul> <li>at rotary coding switch on switch position 12</li> </ul>	123 A		
<ul> <li>at rotary coding switch on switch position 13</li> </ul>	128 A		
<ul> <li>at rotary coding switch on switch position 14</li> </ul>	133 A		
<ul> <li>at rotary coding switch on switch position 15</li> </ul>	138 A		
<ul> <li>at rotary coding switch on switch position 16</li> </ul>	143 A		
• minimum	68 A		
minimum load [%]	15 %; Relative to smallest settable le		
power loss [W] for rated value of the current at AC			
<ul> <li>at 40 °C after startup</li> </ul>	23 W		
<ul> <li>at 50 °C after startup</li> </ul>	19 W		
at 60 °C after startup	16 W		
power loss [W] at AC at current limitation 350 %			
<ul> <li>at 40 °C during startup</li> </ul>	1 336 W		
• at 50 °C during startup	1 134 W		
at 60 °C during startup	1 007 W		
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor		
Control circuit/ Control			
type of voltage of the control supply voltage	AC		
control supply voltage at AC			
● at 50 Hz	110 250 V		
● at 60 Hz	110 250 V		
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %		
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %		
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %		
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %		
control supply voltage frequency	50 60 Hz		
relative negative tolerance of the control supply voltage frequency	-10 %		
relative positive tolerance of the control supply voltage frequency	10 %		
control supply current in standby mode rated value	30 mA		
holding current in bypass operation rated value	80 mA		
inrush current by closing the bypass contacts maximum	2.5 A		
inrush current peak at application of control supply voltage maximum	12.2 A		
duration of inrush current peak at application of control supply voltage	2.2 ms		
design of the overvoltage protection	Varistor		
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply		
Inputs/ Outputs			
number of digital inputs	1		
number of digital outputs	3		
not parameterizable	2		
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)		
number of analog outputs	0		
switching capacity current of the relay outputs			
at AC-15 at 250 V rated value	3 A		
• at DC-13 at 24 V rated value	1 A		
Installation/ mounting/ dimensions			
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back		
fastening method	screw fixing		
height	198 mm		
width	120 mm		

douth	240 mm
depth required spacing with side-by-side mounting	249 mm
forwards	10 mm
<ul><li>backwards</li><li>upwards</li></ul>	0 mm 100 mm
•	75 mm
• downwards	
• at the side	5 mm
weight without packaging Connections/ Terminals	3.2 kg
type of electrical connection	hook an annuality
• for main current circuit	busbar connection
• for control circuit	spring-loaded terminals
width of connection bar maximum	25 mm
wire length for thermistor connection	50 m
<ul> <li>with conductor cross-section = 0.5 mm² maximum</li> <li>with conductor cross-section = 1.5 mm² maximum</li> </ul>	50 m
	150 m 250 m
with conductor cross-section = 2.5 mm² maximum  type of compactable conductor cross sections	250 111
type of connectable conductor cross-sections	16 120 mm²
for main contacts for box terminal using the front clamping point solid      for main contacts for box terminal using the front.	16 120 mm <sup>2</sup>
for main contacts for box terminal using the front clamping point finely stranded with core end processing     for main contacts for box terminal using the front.	16 120 mm <sup>2</sup>
<ul> <li>for main contacts for box terminal using the front clamping point finely stranded without core end processing</li> <li>for main contacts for box terminal using the front</li> </ul>	10 120 mm <sup>2</sup>
clamping point stranded  for main contacts for box terminal using the front clamping point stranded	16 70 mm²
clamping point solid  • for AWG cables for main contacts for box terminal using	6 250 kcmil
the back clamping point  • for main contacts for box terminal using both clamping	max. 1x 95 mm², 1x 120 mm²
points solid  • for main contacts for box terminal using both clamping	max. 1x 95 mm², 1x 120 mm²
<ul><li>points finely stranded with core end processing</li><li>for main contacts for box terminal using both clamping</li></ul>	max. 1x 95 mm², 1x 120 mm²
<ul><li>points finely stranded without core end processing</li><li>for main contacts for box terminal using both clamping</li></ul>	max. 2x 120 mm²
<ul><li>for main contacts for box terminal using the back</li></ul>	16 120 mm²
<ul><li>clamping point finely stranded with core end processing</li><li>for main contacts for box terminal using the back</li></ul>	10 120 mm²
<ul><li>clamping point finely stranded without core end processing</li><li>for main contacts for box terminal using the back</li></ul>	16 120 mm²
type of connectable conductor cross-sections	
for AWG cables for main current circuit solid	4 250 kcmil
for DIN cables for main contacts stranded	4 250 KCIIII 16 95 mm²
for DIN cable lug for main contacts stranded  for DIN cable lug for main contacts finely stranded	25 120 mm <sup>2</sup>
type of connectable conductor cross-sections	20 120 HIIII
for control circuit solid	2x (0.25 1.5 mm²)
for control circuit solid     for control circuit finely stranded with core end processing	2x (0.25 1.5 mm²)
for AWG cables for control circuit solid	2x (0.25 1.5 mm²) 2x (24 16)
for AWG cables for control circuit solid     for AWG cables for control circuit finely stranded with core end processing	2x (24 16) 2x (24 16)
wire length	
between soft starter and motor maximum	800 m
at the digital inputs at AC maximum	1 000 m
tightening torque	
for main contacts with screw-type terminals	10 14 N·m
for auxiliary and control contacts with screw-type terminals	0.8 1.2 N·m
tightening torque [lbf·in]	
for main contacts with screw-type terminals	89 124 lbf·in
for auxiliary and control contacts with screw-type	7 10.3 lbf·in
terminals	

ambient conditions			
installation altitude at height above sea level maximum	5 000 m; derating as of 1000 m, see Manual		
ambient temperature			
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above		
during storage and transport	-40 +80 °C		
environmental category			
<ul> <li>during operation according to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S (sand must not get into the devices), 3M6		
<ul> <li>during storage according to IEC 60721</li> </ul>	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not inside the devices), 1M4		
<ul> <li>during transport according to IEC 60721</li> </ul>	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)		
EMC emitted interference	acc. to IEC 60947-4-2: Class A		
ommunication/ Protocol			
communication module is supported			
PROFINET standard	Yes		
EtherNet/IP	Yes		
Modbus RTU	Yes		
Modbus TCP	Yes		
PROFIBUS	Yes		
L/CSA ratings			
manufacturer's article number			
of circuit breaker			
usable for Standard Faults at 460/480 V according to UL	Siemens type: 3VA5225, max. 250 A; Iq = 10 kA		
• of the fuse			
<ul> <li>usable for Standard Faults up to 575/600 V according to UL</li> </ul>	Type: Class RK5 / K5, max. 350 A; lq = 10 kA		
— usable for High Faults up to 575/600 V according to UL	Type: Class J, max. 350 A; Iq = 100 kA		
operating power [hp] for 3-phase motors			
<ul> <li>at 200/208 V at 50 °C rated value</li> </ul>	40 hp		
• at 220/230 V at 50 °C rated value	40 hp		
<ul> <li>at 460/480 V at 50 °C rated value</li> </ul>	100 hp		
• at 575/600 V at 50 °C rated value	125 hp		
afety related data			
protection class IP on the front according to IEC 60529	IP00; IP20 with cover		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover		
TEX	inigor care, recrease contact nom the next with cover		
certificate of suitability			
ATEX	Yes		
IECEX	Yes		
IECEX     UKEX			
UKEX     hardware fault tolerance according to IEC 61508 relating to ATEX	Yes 0		
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.09		
PFHD with high demand rate according to EN 62061 relating to ATEX	9E-6 1/h		
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1		
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a		
ertificates/ approvals			



Confirmation









For use in hazardous locations Declaration of Conformity Test Certificates Marine / Shipping



### Explosion Protection Certificate





Type Test Certificates/Test Report



Marine / Shipping

other





Confirmation

#### **Further information**

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

# Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

## Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5055-2TB15

### Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5055-2TB15

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5055-2TB15

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5055-2TB15&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5055-2TB15/char


Characteristic: Installation altitude


 $\underline{\text{http://www.automation.siemens.com/bilddb/index.aspx?view=Search\&mlfb=3RW5055-2TB15\&objecttype=14\&gridview=view1}$ 

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

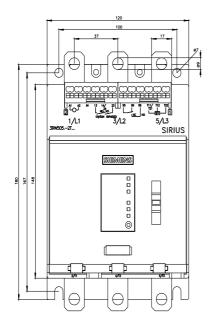

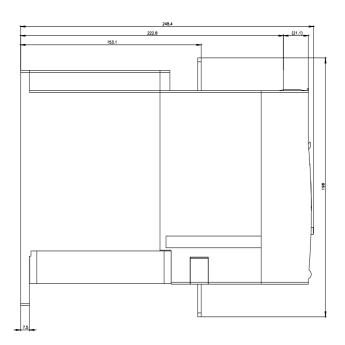

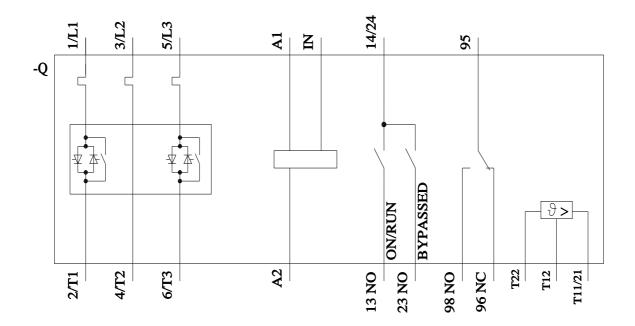

last modified: 1/14/2023 🖸

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RW50552TB15