## SIEMENS

## Data sheet

## 3RW5076-2AB15



SIRIUS soft starter 200-600 V 470 A, 110-250 V AC Spring-loaded terminals Analog output

Figu	ro ci	imil	20
rigu	0.21		au

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW50
manufacturer's article number	
of standard HMI module usable	<u>3RW5980-0HS01</u>
<ul> <li>of high feature HMI module usable</li> </ul>	<u>3RW5980-0HF00</u>
of communication module PROFINET standard usable	3RW5980-0CS00
of communication module PROFIBUS usable	<u>3RW5980-0CP00</u>
of communication module Modbus TCP usable	<u>3RW5980-0CT00</u>
of communication module Modbus RTU usable	3RW5980-0CR00
of communication module Ethernet/IP	<u>3RW5980-0CE00</u>
of circuit breaker usable at 400 V	3VA2580-6HN32-0AA0; Type of assignment 1, Ig = 65 kA
of circuit breaker usable at 500 V	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE1 436-2; Type of coordination 2, <math>Iq = 65 \text{ kA}</math></u>
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE3 340-8; Type of coordination 2, Iq = 65 kA</u>
<ul> <li>of line contactor usable up to 480 V</li> </ul>	3RT1076
<ul> <li>of line contactor usable up to 690 V</li> </ul>	<u>3RT1076</u>
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 20 s
ramp-down time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	No
• is supported HMI-Standard	Yes
<ul> <li>is supported HMI-High Feature</li> </ul>	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	
<ul> <li>for main current circuit</li> </ul>	100 ms

for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
between main and auxiliary circuit	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
utilization category according to IEC 60947-4-2	AC-53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	09/23/2019
product function	
<ul> <li>ramp-up (soft starting)</li> </ul>	Yes
<ul> <li>ramp-down (soft stop)</li> </ul>	Yes
Soft Torque	Yes
<ul> <li>adjustable current limitation</li> </ul>	Yes
• pump ramp down	Yes
<ul> <li>intrinsic device protection</li> </ul>	Yes
<ul> <li>motor overload protection</li> </ul>	Yes; Electronic motor overload protection
<ul> <li>evaluation of thermistor motor protection</li> </ul>	No
● auto-RESET	Yes
manual RESET	Yes
remote reset	Yes; By turning off the control supply voltage
<ul> <li>communication function</li> </ul>	Yes
operating measured value display	Yes; Only in conjunction with special accessories
• error logbook	Yes; Only in conjunction with special accessories
• via software parameterizable	No
via software configurable	Yes
PROFlenergy     voltage ramp	Yes; in connection with the PROFINET Standard communication module Yes
torque control	No
analog output	Yes; 4 20 mA (default) / 0 10 V (parameterizable with High Feature HMI)
Power Electronics	
operational current	
at 40 °C rated value	470 A
• at 50 °C rated value	416 A
• at 60 °C rated value	380 A
operating voltage	
rated value	200 600 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
operating power for 3-phase motors	
• at 230 V at 40 °C rated value	132 kW
• at 400 V at 40 °C rated value	250 kW
● at 500 V at 40 °C rated value	315 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
at rotary coding switch on switch position 1	200 A
at rotary coding switch on switch position 2	218 A
at rotary coding switch on switch position 3	236 A
at rotary coding switch on switch position 4	254 A
<ul> <li>at rotary coding switch on switch position 5</li> <li>at rotary coding switch on switch position 6</li> </ul>	272 A 200 A
<ul> <li>at rotary coding switch on switch position 6</li> <li>at rotary coding switch on switch position 7</li> </ul>	290 A 308 A
<ul> <li>at rotary coding switch on switch position 7</li> <li>at rotary coding switch on switch position 8</li> </ul>	308 A 326 A
at rotary coung switch on switch position δ	020 A

<ul> <li>at rotary coding switch on switch position 9</li> </ul>	344 A
<ul> <li>at rotary coding switch on switch position 10</li> </ul>	362 A
<ul> <li>at rotary coding switch on switch position 11</li> </ul>	380 A
<ul> <li>at rotary coding switch on switch position 12</li> </ul>	398 A
<ul> <li>at rotary coding switch on switch position 13</li> </ul>	416 A
<ul> <li>at rotary coding switch on switch position 14</li> </ul>	434 A
<ul> <li>at rotary coding switch on switch position 15</li> </ul>	452 A
<ul> <li>at rotary coding switch on switch position 16</li> </ul>	470 A
• minimum	200 A
minimum load [%]	15 %; Relative to smallest settable le
power loss [W] for rated value of the current at AC	
• at 40 °C after startup	56 W
• at 50 °C after startup	44 W
• at 60 °C after startup	37 W
power loss [W] at AC at current limitation 350 %	
• at 40 °C during startup	5 344 W
• at 50 °C during startup	4 438 W
	3 876 W
type of the motor protection	
Control circuit/ Control	Electronic, tripping in the event of thermal overload of the motor
	10
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz	110 250 V
• at 60 Hz	110 250 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	30 mA
holding current in bypass operation rated value	105 mA
inrush current by closing the bypass contacts maximum	2.2 A
inrush current peak at application of control supply voltage maximum	12.2 A
duration of inrush current peak at application of control supply voltage	2.2 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of digital outputs	3
not parameterizable	2
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface
	+/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	230 mm
width	160 mm
depth	282 mm

required spacing with side-by-side mounting	
forwards	10 mm
backwards	0 mm
• upwards	100 mm
downwards	75 mm
at the side	5 mm
weight without packaging	7.3 kg
Connections/ Terminals	1.0 Kg
type of electrical connection	
for main current circuit	busbar connection
for control circuit	spring-loaded terminals
width of connection bar maximum	35 mm; with connection cover 3RT1966-4EA1 maximum length 45 mm
type of connectable conductor cross-sections	
for main contacts for box terminal using the front clamping point solid	95 300 mm²
<ul> <li>for main contacts for box terminal using the front clamping point finely stranded with core end processing</li> </ul>	70 240 mm²
<ul> <li>for main contacts for box terminal using the front clamping point finely stranded without core end processing</li> </ul>	70 240 mm²
<ul> <li>for main contacts for box terminal using the front clamping point stranded</li> </ul>	95 300 mm²
<ul> <li>for main contacts for box terminal using the back clamping point solid</li> </ul>	120 240 mm <sup>2</sup>
<ul> <li>for AWG cables for main contacts for box terminal using the back clamping point</li> </ul>	250 500 kcmil
<ul> <li>for main contacts for box terminal using both clamping points solid</li> </ul>	min. 2x 70 mm², max. 2x 240 mm²
for main contacts for box terminal using both clamping points finely stranded with core end processing	min. 2x 50 mm², max. 2x 185 mm²
for main contacts for box terminal using both clamping points finely stranded without core end processing	min. 2x 50 mm², max. 2x 185 mm²
for main contacts for box terminal using both clamping points stranded	min. 2x 70 mm², max. 2x 240 mm²
<ul> <li>for main contacts for box terminal using the back clamping point finely stranded with core end processing</li> <li>for main contacts for box terminal using the back</li> </ul>	120 185 mm <sup>2</sup> 120 185 mm <sup>2</sup>
<ul> <li>for main contacts for box terminal using the back</li> <li>for main contacts for box terminal using the back</li> </ul>	120 240 mm <sup>2</sup>
clamping point stranded	
type of connectable conductor cross-sections	
<ul> <li>for AWG cables for main current circuit solid</li> </ul>	2/0 500 kcmil
<ul> <li>for DIN cable lug for main contacts stranded</li> </ul>	50 240 mm²
<ul> <li>for DIN cable lug for main contacts finely stranded</li> </ul>	70 240 mm²
type of connectable conductor cross-sections	
<ul> <li>for control circuit solid</li> </ul>	2x (0.25 1.5 mm²)
<ul> <li>for control circuit finely stranded with core end processing</li> </ul>	2x (0.25 1.5 mm²)
<ul> <li>for AWG cables for control circuit solid</li> </ul>	2x (24 16)
<ul> <li>for AWG cables for control circuit finely stranded with core end processing</li> </ul>	2x (24 16)
wire length	
<ul> <li>between soft starter and motor maximum</li> </ul>	800 m
<ul> <li>at the digital inputs at AC maximum</li> </ul>	1 000 m
tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	14 24 N·m
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m
tightening torque [lbf·in]	
for main contacts with screw-type terminals	124 210 lbf·in
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	7 10.3 lbf·in
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; derating as of 1000 m, see Manual
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
<ul> <li>during storage and transport</li> </ul>	-40 +80 °C


environmental category		
<ul> <li>during operation according to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6	
during storage according to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4	
<ul> <li>during transport according to IEC 60721</li> </ul>	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)	
EMC emitted interference	acc. to IEC 60947-4-2: Class A	
Communication/ Protocol		
communication module is supported		
PROFINET standard	Yes	
• EtherNet/IP	Yes	
Modbus RTU	Yes	
Modbus TCP	Yes	
PROFIBUS	Yes	
UL/CSA ratings		
manufacturer's article number		
• of the fuse		
	Type: Class L may $1600 \text{ A}$ ; $l_{\pi} = 20 \text{ kA}$	
— usable for Standard Faults up to 575/600 V according to UL	Type: Class L, max. 1600 A; lq = 30 kA	
<ul> <li>— usable for High Faults up to 575/600 V according to UL</li> </ul>	Type: Class L, max. 1200 A; lq = 100 kA	
operating power [hp] for 3-phase motors		
• at 200/208 V at 50 °C rated value	150 hp	
• at 220/230 V at 50 °C rated value	150 hp	
• at 460/480 V at 50 °C rated value	350 hp	
• at 575/600 V at 50 °C rated value	450 hp	
Safety related data		
protection class IP on the front according to IEC 60529	IP00; IP20 with cover	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover	
ATEX		
certificate of suitability		
• ATEX	Yes	
• IECEx	Yes	
• UKEX	Yes	
hardware fault tolerance according to IEC 61508 relating to ATEX	0	
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.09	
PFHD with high demand rate according to EN 62061 relating to ATEX	9E-6 1/h	
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1	
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a	
Certificates/ approvals		
General Product Approval	For use in hazard- ous locations	
<u>Confirmation</u>		
Ê (	› 🖤 EHL 👾	
-an CCC	or Alex	
For use in hazardous locations Declaration of	f Conformity Test Certificates Marine / Shipping	
IECEx Explosion Protection Certificate UK	EG-Konf.	
Marine / Shipping other		







Further information	
Siemens has decided to exit the Russian ma	
https://press.siemens.com/global/en/pressreleas	<u>se/siemens-wind-down-russian-business</u>
Siemens is working on the renewal of the cu	
	status of validity of the EAC certification if you intend to import or offer to supply these products to an
EAC relevant market (other than the sanctioned	I EAEU member states Russia or Belarus).
Information on the packaging	
https://support.industry.siemens.com/cs/ww/en/v	<u>view/109813875</u>
Information- and Downloadcenter (Catalogs,	, Brochures,)
https://www.siemens.com/ic10	
Industry Mall (Online ordering system)	
https://mall.industry.siemens.com/mall/en/en/Ca	atalog/product?mlfb=3RW5076-2AB15
Cax online generator	
http://support.automation.siemens.com/WW/CA	Xorder/default.aspx?lang=en&mlfb=3RW5076-2AB15
Service&Support (Manuals, Certificates, Cha	aracteristics, FAQs,)
https://support.industry.siemens.com/cs/ww/en/p	ps/3RW5076-2AB15
Image database (product images, 2D dimens	sion drawings, 3D models, device circuit diagrams, EPLAN macros,)
http://www.automation.siemens.com/bilddb/cax	de.aspx?mlfb=3RW5076-2AB15⟨=en
Characteristic: Tripping characteristics, I <sup>2</sup> t, L	_et-through current
https://support.industry.siemens.com/cs/ww/en/	ps/3RW5076-2AB15/char
Characteristic: Installation altitude	
http://www.automation.siemens.com/bilddb/inde	ex.aspx?view=Search&mlfb=3RW5076-2AB15&objecttype=14&gridview=view1
Simulation Tool for Soft Starters (STS)	
https://support.industry.sigmons.com/cs/ww/en/	view/101404017

https://support.industry.siemens.com/cs/ww/en/view/101494917

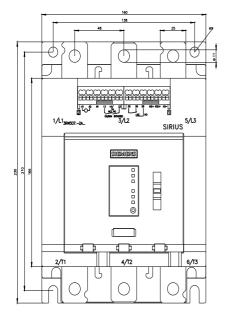

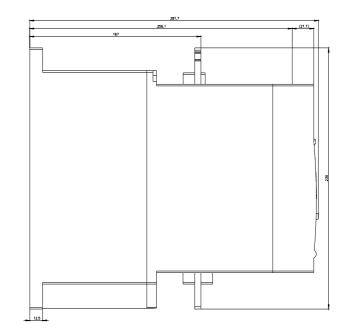

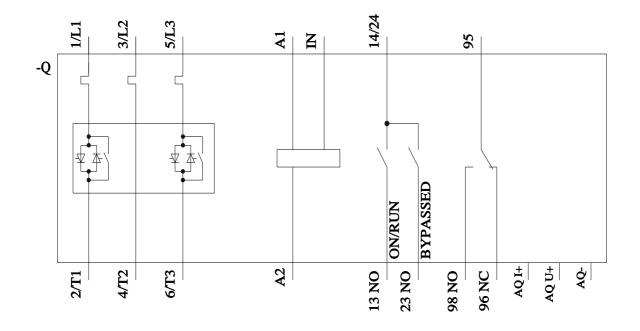

last modified:

1/14/2023 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RW50762AB15