# SIEMENS

#### Data sheet

### 3RW5076-2TB15



SIRIUS soft starter 200-600 V 470 A, 110-250 V AC Spring-loaded terminals Thermistor input

Fi				

product brand name	SIRIUS		
product stand name	Hybrid switching devices		
product designation	Soft starter		
product type designation	3RW50		
manufacturer's article number			
of standard HMI module usable	<u>3RW5980-0HS01</u>		
of high feature HMI module usable	3RW5980-0HF00		
<ul> <li>of communication module PROFINET standard usable</li> </ul>	<u>3RW5980-0CS00</u>		
of communication module PROFIBUS usable	3RW5980-0CP00		
of communication module Modbus TCP usable	<u>3RW5980-0CT00</u>		
of communication module Modbus RTU usable	3RW5980-0CR00		
of communication module Ethernet/IP	3RW5980-0CE00		
of circuit breaker usable at 400 V	<u>3VA2580-6HN32-0AA0: Type of assignment 1, Ig = 65 kA</u>		
of circuit breaker usable at 500 V	3VA2580-6HN32-0AA0: Type of assignment 1, Ig = 65 kA		
• of the gG fuse usable up to 690 V	2x3NA3365-6; Type of coordination 1, Iq = 65 kA		
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE1 436-2; Type of coordination 2, <math>Iq = 65 kA</math></u>		
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE3 340-8; Type of coordination 2, Iq = 65 kA		
<ul> <li>of line contactor usable up to 480 V</li> </ul>	<u>3RT1076</u>		
<ul> <li>of line contactor usable up to 690 V</li> </ul>	3RT1076		
General technical data			
starting voltage [%]	30 100 %		
stopping voltage [%]	50 %; non-adjustable		
start-up ramp time of soft starter	0 20 s		
ramp-down time of soft starter	0 20 s		
current limiting value [%] adjustable	130 700 %		
certificate of suitability			
CE marking	Yes		
UL approval	Yes		
CSA approval	Yes		
product component			
HMI-High Feature	No		
<ul> <li>is supported HMI-Standard</li> </ul>	Yes		
<ul> <li>is supported HMI-High Feature</li> </ul>	Yes		
product feature integrated bypass contact system	Yes		
number of controlled phases	2		
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2		
buffering time in the event of power failure			
<ul> <li>for main current circuit</li> </ul>	100 ms		

for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1
surge voltage resistance rated value	6 KV
maximum permissible voltage for protective separation	
<ul> <li>between main and auxiliary circuit</li> </ul>	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
utilization category according to IEC 60947-4-2	AC-53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	09/23/2019
product function	
<ul> <li>ramp-up (soft starting)</li> </ul>	Yes
<ul> <li>ramp-down (soft stop)</li> </ul>	Yes
Soft Torque	Yes
<ul> <li>adjustable current limitation</li> </ul>	Yes
• pump ramp down	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick
• auto-RESET	Yes
manual RESET	Yes
remote reset	Yes; By turning off the control supply voltage
communication function	Yes
operating measured value display	Yes; Only in conjunction with special accessories
error logbook	Yes; Only in conjunction with special accessories No
<ul> <li>via software parameterizable</li> <li>via software configurable</li> </ul>	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard communication module
voltage ramp	Yes
torque control	No
analog output	No
Power Electronics	
operational current	
<ul> <li>at 40 °C rated value</li> </ul>	470 A
<ul> <li>at 50 °C rated value</li> </ul>	416 A
• at 60 °C rated value	380 A
operating voltage	
rated value	200 600 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
operating power for 3-phase motors	
• at 230 V at 40 °C rated value	132 kW
• at 400 V at 40 °C rated value	250 kW
• at 500 V at 40 °C rated value	315 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	200.4
<ul> <li>at rotary coding switch on switch position 1</li> <li>at rotary coding switch on switch position 2</li> </ul>	200 A
at rotary coding switch on switch position 2	218 A
at rotary coding switch on switch position 3	236 A
<ul> <li>at rotary coding switch on switch position 4</li> <li>at rotary coding switch on switch position 5</li> </ul>	254 A 272 A
<ul> <li>at rotary coding switch on switch position 5</li> <li>at rotary coding switch on switch position 6</li> </ul>	
<ul> <li>at rotary coding switch on switch position 6</li> <li>at rotary coding switch on switch position 7</li> </ul>	290 A 308 A
<ul> <li>at rotary coding switch on switch position 7</li> </ul>	308 A

<ul> <li>at rotary coding switch on switch position 8</li> </ul>	326 A
<ul> <li>at rotary coding switch on switch position 9</li> </ul>	344 A
<ul> <li>at rotary coding switch on switch position 10</li> </ul>	362 A
<ul> <li>at rotary coding switch on switch position 11</li> </ul>	380 A
<ul> <li>at rotary coding switch on switch position 12</li> </ul>	398 A
<ul> <li>at rotary coding switch on switch position 13</li> </ul>	416 A
<ul> <li>at rotary coding switch on switch position 14</li> </ul>	434 A
at rotary coding switch on switch position 15	452 A
	470 A
<ul> <li>at rotary coding switch on switch position 16</li> </ul>	
• minimum	
minimum load [%]	15 %; Relative to smallest settable le
power loss [W] for rated value of the current at AC	
• at 40 °C after startup	56 W
• at 50 °C after startup	44 W
• at 60 °C after startup	37 W
power loss [W] at AC at current limitation 350 %	
<ul> <li>at 40 °C during startup</li> </ul>	5 344 W
<ul> <li>at 50 °C during startup</li> </ul>	4 438 W
• at 60 °C during startup	3 876 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz	110 250 V
• at 60 Hz	110 250 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	30 mA
holding current in bypass operation rated value	105 mA
inrush current by closing the bypass contacts maximum	2.2 A
inrush current peak at application of control supply voltage maximum	12.2 A
duration of inrush current peak at application of control supply voltage	2.2 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
	3
number of digital outputs	2
not parameterizable	
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	0
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	230 mm
width	160 mm

depth     282 mm       required spacing with side-by-side mounting     10 mm       • forwards     0 mm       • backwards     0 mm       • upwards     100 mm       • downwards     75 mm       • at the side     5 mm       weight without packaging     7.3 kg			
• backwards0 mm• upwards100 mm• downwards75 mm• at the side5 mmweight without packaging7.3 kg			
• upwards     100 mm       • downwards     75 mm       • at the side     5 mm       weight without packaging     7.3 kg			
downwards     odd ownwards     at the side     5 mm     75 mm			
• at the side 5 mm weight without packaging 7.3 kg			
weight without packaging     7.3 kg			
Connections/ Terminals			
type of electrical connection			
for main current circuit     busbar connection			
for control circuit     spring-loaded terminals			
width of connection bar maximum 35 mm; with connection cover 3RT1966-4EA1 maximum length 45 mm	m		
wire length for thermistor connection			
• with conductor cross-section = 0.5 mm <sup>2</sup> maximum 50 m			
• with conductor cross-section = 1.5 mm <sup>2</sup> maximum 150 m			
• with conductor cross-section = 2.5 mm <sup>2</sup> maximum 250 m			
type of connectable conductor cross-sections			
for main contacts for box terminal using the front clamping point solid     95 300 mm <sup>2</sup>			
<ul> <li>for main contacts for box terminal using the front clamping point finely stranded with core end processing</li> <li>70 240 mm<sup>2</sup></li> </ul>			
for main contacts for box terminal using the front clamping point finely stranded without core end processing			
for main contacts for box terminal using the front clamping point stranded			
for main contacts for box terminal using the back     clamping point solid			
for AWG cables for main contacts for box terminal using the back clamping point     for main contacts for box terminal using both clamping     min 2x 70 mm² max 2x 240 mm²			
<ul> <li>for main contacts for box terminal using both clamping points solid</li> <li>for main contacts for box terminal using both clamping</li> <li>min. 2x 70 mm<sup>2</sup>, max. 2x 240 mm<sup>2</sup></li> <li>min. 2x 50 mm<sup>2</sup>, max. 2x 185 mm<sup>2</sup></li> </ul>			
<ul> <li>For main contacts for box terminal using both clamping</li> <li>For main contacts for box terminal using both clamping</li> <li>For main contacts for box terminal using both clamping</li> <li>Min. 2x 50 mm², max. 2x 185 mm²</li> </ul>			
<ul> <li>for main contacts for box terminal using both clamping</li> <li>for main contacts for box terminal using both clamping</li> <li>min. 2x 70 mm<sup>2</sup>, max. 2x 240 mm<sup>2</sup></li> </ul>			
<ul> <li>points stranded</li> <li>for main contacts for box terminal using the back</li> <li>120 185 mm<sup>2</sup></li> </ul>			
<ul> <li>clamping point finely stranded with core end processing</li> <li>for main contacts for box terminal using the back</li> <li>120 185 mm<sup>2</sup></li> </ul>			
<ul> <li>clamping point finely stranded without core end processing</li> <li>for main contacts for box terminal using the back</li> <li>120 240 mm<sup>2</sup></li> </ul>			
clamping point stranded			
type of connectable conductor cross-sections			
for AWG cables for main current circuit solid     2/0 500 kcmil			
	50 240 mm <sup>2</sup>		
for DIN cable lug for main contacts finely stranded     70 240 mm <sup>2</sup>			
type of connectable conductor cross-sections       • for control circuit solid       2x (0.25 1.5 mm²)			
for control circuit solid         2x (0.25 1.5 mm <sup>2</sup> )         for control circuit finely stranded with core end processing         2x (0.25 1.5 mm <sup>2</sup> )			
for AWG cables for control circuit solid     2x (24 16)     2x (24 16)			
• for AWG cables for control circuit solid 2x (24 16) • for AWG cables for control circuit finely stranded with 2x (24 16)			
core end processing wire length			
between soft starter and motor maximum     800 m			
at the digital inputs at AC maximum     1000 m			
tightening torque			
<ul> <li>for main contacts with screw-type terminals</li> <li>14 24 N⋅m</li> </ul>			
• for auxiliary and control contacts with screw-type 0.8 1.2 N·m terminals			
tightening torque [lbf·in]			
• for main contacts with screw-type terminals 124 210 lbf-in			

Ambient conditions			
installation altitude at height above sea level maximum	5 000 m; derating as of 1000 m, see Manual		
ambient temperature			
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above		
during storage and transport	-40 +80 °C		
environmental category			
during operation according to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6		
during storage according to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4		
<ul> <li>during transport according to IEC 60721</li> </ul>	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)		
EMC emitted interference	acc. to IEC 60947-4-2: Class A		
Communication/ Protocol			
communication module is supported			
PROFINET standard	Yes		
• EtherNet/IP	Yes		
Modbus RTU	Yes		
Modbus TCP	Yes		
PROFIBUS	Yes		
UL/CSA ratings			
manufacturer's article number			
of the fuse			
<ul> <li>— usable for Standard Faults up to 575/600 V according to UL</li> </ul>	Type: Class L, max. 1600 A; lq = 30 kA		
— usable for High Faults up to 575/600 V according to UL	Type: Class L, max. 1200 A; lq = 100 kA		
operating power [hp] for 3-phase motors			
<ul> <li>at 200/208 V at 50 °C rated value</li> </ul>	150 hp		
<ul> <li>at 220/230 V at 50 °C rated value</li> </ul>	150 hp		
<ul> <li>at 460/480 V at 50 °C rated value</li> </ul>	350 hp		
• at 575/600 V at 50 °C rated value	450 hp		
Safety related data			
protection class IP on the front according to IEC 60529	IP00; IP20 with cover		
touch protection on the front according to IEC 60529			
ATEX	finger-safe, for vertical contact from the front with cover		
certificate of suitability			
• ATEX	Yes		
• IECEx	Yes		
• UKEX	Yes		
hardware fault tolerance according to IEC 61508 relating to ATEX	0		
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.09		
PFHD with high demand rate according to EN 62061 relating to ATEX	9E-6 1/h		
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1		
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3а		
Certificates/ approvals			
	For use in hazard-		
General Product Approval	ous locations		
Confirmation			
CSA CCC	UL IECEx		
For use in hazardous locations Declaration of	f Conformity Test Certificates Marine / Shipping		



Explosion Protection Certificate





Type Test Certificates/Test Report



Marine / Shipping





**Confirmation** 

other

#### Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5076-2TB15

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5076-2TB15

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5076-2TB15

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5076-2TB15&lang=en

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5076-2TB15/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5076-2TB15&objecttype=14&aridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

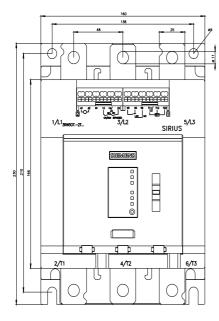

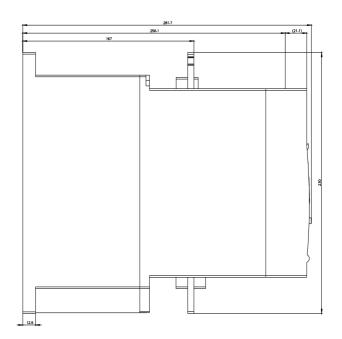

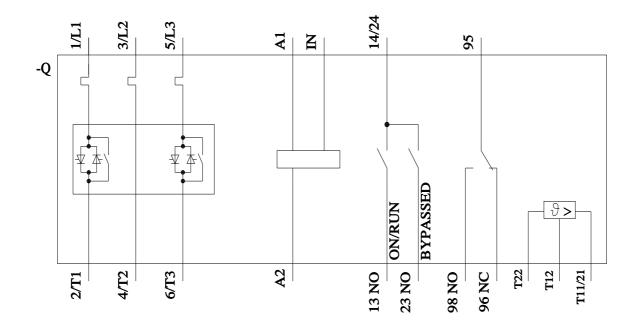

last modified:

1/14/2023 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RW50762TB15