SIEMENS

Data sheet 3RW5076-6TB05



SIRIUS soft starter 200-600 V 470 A, 24 V AC/DC Screw terminals Thermistor input

Figure similar

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW50
manufacturer's article number	
 of standard HMI module usable 	3RW5980-0HS01
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
 of circuit breaker usable at 500 V 	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
 of the gG fuse usable up to 690 V 	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1 436-2; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE3 340-8; Type of coordination 2, Iq = 65 kA
 of line contactor usable up to 480 V 	<u>3RT1076</u>
 of line contactor usable up to 690 V 	<u>3RT1076</u>
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 20 s
ramp-down time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	No
• is supported HMI-Standard	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	
for main current circuit	100 ms

for anything about	400
• for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
between main and auxiliary circuit	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
utilization category according to IEC 60947-4-2	AC-53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	09/23/2019
product function	
ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
Soft Torque	Yes
adjustable current limitation	Yes
pump ramp down	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick
• auto-RESET	Yes
• manual RESET	Yes
remote reset	Yes; By turning off the control supply voltage
communication function	Yes
 operating measured value display 	Yes; Only in conjunction with special accessories
error logbook	Yes; Only in conjunction with special accessories
 via software parameterizable 	No
 via software configurable 	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard communication module
• voltage ramp	Yes
• torque control	No
analog output	No
Power Electronics	
operational current	
• at 40 °C rated value	470 A
• at 50 °C rated value	416 A
at 60 °C rated value	380 A
operating voltage	
rated value	200 600 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
operating power for 3-phase motors	
• at 230 V at 40 °C rated value	132 kW
• at 400 V at 40 °C rated value	250 kW
at 500 V at 40 °C rated value	315 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
 at rotary coding switch on switch position 1 	200 A
 at rotary coding switch on switch position 2 	218 A
 at rotary coding switch on switch position 3 	236 A
 at rotary coding switch on switch position 4 	254 A
at rotary coding switch on switch position 5	272 A
 at rotary coding switch on switch position 6 	290 A
at rotary coding switch on switch position 7	308 A

 at rotary coding switch on switch position 8 	326 A
 at rotary coding switch on switch position 9 	344 A
 at rotary coding switch on switch position 10 	362 A
 at rotary coding switch on switch position 11 	380 A
 at rotary coding switch on switch position 12 	398 A
 at rotary coding switch on switch position 13 	416 A
 at rotary coding switch on switch position 14 	434 A
 at rotary coding switch on switch position 15 	452 A
 at rotary coding switch on switch position 16 	470 A
• minimum	200 A
minimum load [%]	15 %; Relative to smallest settable le
power loss [W] for rated value of the current at AC	
at 40 °C after startup	56 W
• at 50 °C after startup	44 W
• at 60 °C after startup	37 W
power loss [W] at AC at current limitation 350 %	
• at 40 °C during startup	5 344 W
• at 50 °C during startup	4 438 W
at 60 °C during startup	3 876 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	Noibo
• at 50 Hz rated value	24 V
at 60 Hz rated value	24 V
relative negative tolerance of the control supply voltage at	-20 %
AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage	-10 %
frequency relative positive tolerance of the control supply voltage	10 %
frequency	10 //
control supply voltage	04.1/
at DC rated value relative negative tolerance of the control supply voltage at	24 V -20 %
DC relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	160 mA
holding current in bypass operation rated value	490 mA
inrush current by closing the bypass contacts maximum	7.6 A
inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage	7.6 A 3.3 A
maximum	
duration of inrush current peak at application of control supply voltage	12.1 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of digital outputs	3
not parameterizable	2
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	0
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
at DC-13 at 24 V rated value	1 A

estallation/ mounting/ dimensions	''I
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	230 mm
width	160 mm
depth	282 mm
required spacing with side-by-side mounting	
• forwards	10 mm
backwards	0 mm
• upwards	100 mm
downwards	75 mm
at the side	5 mm
weight without packaging	7.3 kg
onnections/ Terminals	
type of electrical connection	
for main current circuit	busbar connection
• for control circuit	screw-type terminals
width of connection bar maximum	35 mm; with connection cover 3RT1966-4EA1 maximum length 45 mm
wire length for thermistor connection	
with conductor cross-section = 0.5 mm² maximum	50 m
• with conductor cross-section = 1.5 mm² maximum	150 m
• with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
for main contacts for box terminal using the front	95 300 mm²
clamping point solid • for main contacts for box terminal using the front	70 240 mm²
clamping point finely stranded with core end processing	
 for main contacts for box terminal using the front clamping point finely stranded without core end processing 	70 240 mm²
 for main contacts for box terminal using the front clamping point stranded 	95 300 mm²
 for main contacts for box terminal using the back clamping point solid 	120 240 mm²
 for AWG cables for main contacts for box terminal using the back clamping point 	250 500 kcmil
for main contacts for box terminal using both clamping points solid	min. 2x 70 mm², max. 2x 240 mm²
for main contacts for box terminal using both clamping points finely stranded with core end processing for main contacts for box terminal using both clamping.	min. 2x 50 mm², max. 2x 185 mm²
for main contacts for box terminal using both clamping points finely stranded without core end processing for main contacts for box terminal using both clamping.	min. 2x 50 mm², max. 2x 185 mm²
 for main contacts for box terminal using both clamping points stranded for main contacts for box terminal using the back 	min. 2x 70 mm², max. 2x 240 mm² 120 185 mm²
clamping point finely stranded with core end processing • for main contacts for box terminal using the back	120 185 mm ²
clamping point finely stranded without core end processingfor main contacts for box terminal using the back	120 240 mm²
clamping point stranded	
type of connectable conductor cross-sections	2/0
for AWG cables for main current circuit solid for DIN cable lug for main contacts stranded	2/0 500 kcmil
for DIN cable lug for main contacts stranded for DIN cable lug for main contacts finely stranded	50 240 mm² 70 240 mm²
for DIN cable lug for main contacts finely stranded type of connectable conductor cross-sections	70 240 Hilli
type of connectable conductor cross-sections • for control circuit solid	1v (0.5
	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
 for control circuit finely stranded with core end processing for AWG cables for control circuit solid 	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14)
wire length	
 between soft starter and motor maximum 	800 m
at the digital inputs at AC maximum	1 000 m
tightening torque	
• for main contacts with screw-type terminals	14 24 N·m
 for auxiliary and control contacts with screw-type 	0.8 1.2 N·m

as of 1000 m, see Manual case observe derating at temperatures of 40 °C or above ation, only occasional condensation), 3C3 (no salt mist), 3S2 et into the devices), 3M6 onal condensation), 1C2 (no salt mist), 1S2 (sand must not get s), 1M4 M2 (max. fall height 0.3 m) 7-4-2: Class A
ease observe derating at temperatures of 40 °C or above ation, only occasional condensation), 3C3 (no salt mist), 3S2 et into the devices), 3M6 onal condensation), 1C2 (no salt mist), 1S2 (sand must not get s), 1M4 M2 (max. fall height 0.3 m) 7-4-2: Class A
ease observe derating at temperatures of 40 °C or above ation, only occasional condensation), 3C3 (no salt mist), 3S2 et into the devices), 3M6 onal condensation), 1C2 (no salt mist), 1S2 (sand must not get s), 1M4 M2 (max. fall height 0.3 m) 7-4-2: Class A
ease observe derating at temperatures of 40 °C or above ation, only occasional condensation), 3C3 (no salt mist), 3S2 et into the devices), 3M6 onal condensation), 1C2 (no salt mist), 1S2 (sand must not get s), 1M4 M2 (max. fall height 0.3 m) 7-4-2: Class A
ease observe derating at temperatures of 40 °C or above ation, only occasional condensation), 3C3 (no salt mist), 3S2 et into the devices), 3M6 onal condensation), 1C2 (no salt mist), 1S2 (sand must not get s), 1M4 M2 (max. fall height 0.3 m) 7-4-2: Class A
ation, only occasional condensation), 3C3 (no salt mist), 3S2 et into the devices), 3M6 onal condensation), 1C2 (no salt mist), 1S2 (sand must not get s), 1M4 M2 (max. fall height 0.3 m) 7-4-2: Class A
ation, only occasional condensation), 3C3 (no salt mist), 3S2 et into the devices), 3M6 onal condensation), 1C2 (no salt mist), 1S2 (sand must not get s), 1M4 M2 (max. fall height 0.3 m) 7-4-2: Class A
et into the devices), 3M6 phal condensation), 1C2 (no salt mist), 1S2 (sand must not get s), 1M4 M2 (max. fall height 0.3 m) 7-4-2: Class A ax. 1600 A; Iq = 30 kA
et into the devices), 3M6 phal condensation), 1C2 (no salt mist), 1S2 (sand must not get s), 1M4 M2 (max. fall height 0.3 m) 7-4-2: Class A ax. 1600 A; Iq = 30 kA
et into the devices), 3M6 pnal condensation), 1C2 (no salt mist), 1S2 (sand must not get s), 1M4 M2 (max. fall height 0.3 m) 7-4-2: Class A ax. 1600 A; Iq = 30 kA
ax. 1600 A; Iq = 30 kA
7-4-2: Class A ax. 1600 A; Iq = 30 kA
ax. 1600 A; lq = 30 kA
ax. 1200 A; Iq = 100 kA
over
rtical contact from the front with cover
For use in hazard- ous locations

For use in hazardous locations Declaration of Conformity Test Certificates Marine / Shipping



Explosion Protection Certificate

CE



Type Test Certificates/Test Report



Marine / Shipping

other





Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5076-6TB05

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5076-6TB05

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$

https://support.industry.siemens.com/cs/ww/en/ps/3RW5076-6TB05

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5076-6TB05&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5076-6TB05/char


Characteristic: Installation altitude


 $\underline{http://www.automation.siemens.com/bilddb/index.aspx?view=Search\&mlfb=3RW5076-6TB05\&objecttype=14\&gridview=view1}$

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917





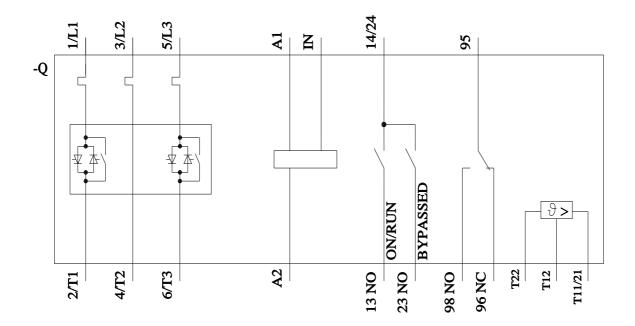

last modified: 1/14/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RW50766TB05