# SIEMENS

#### Data sheet

### 3RW5077-6TB05



SIRIUS soft starter 200-600 V 570 A, 24 V AC/DC Screw terminals Thermistor input

Fi	gu	re	si	mi	lar

product brand name	SIRIUS		
product category	Hybrid switching devices		
product designation	Soft starter		
product type designation	3RW50		
manufacturer's article number			
<ul> <li>of standard HMI module usable</li> </ul>	<u>3RW5980-0HS01</u>		
<ul> <li>of high feature HMI module usable</li> </ul>	<u>3RW5980-0HF00</u>		
<ul> <li>of communication module PROFINET standard usable</li> </ul>	<u>3RW5980-0CS00</u>		
<ul> <li>of communication module PROFIBUS usable</li> </ul>	<u>3RW5980-0CP00</u>		
<ul> <li>of communication module Modbus TCP usable</li> </ul>	<u>3RW5980-0CT00</u>		
<ul> <li>of communication module Modbus RTU usable</li> </ul>	<u>3RW5980-0CR00</u>		
<ul> <li>of communication module Ethernet/IP</li> </ul>	<u>3RW5980-0CE00</u>		
of circuit breaker usable at 400 V	<u></u> <u>3VA2580-6HN32-0AA0: Type of assignment 1. Iq = 65 kA</u>		
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	<u>3VA2580-6HN32-0AA0: Type of assignment 1, lq = 65 kA</u>		
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA		
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE1 437-2; Type of coordination 2, Iq = 65 kA</u>		
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE3 340-8: Type of coordination 2. Iq = 65 kA</u>		
<ul> <li>of line contactor usable up to 480 V</li> </ul>	3TF68		
<ul> <li>of line contactor usable up to 690 V</li> </ul>	3TF68		
General technical data			
starting voltage [%]	30 100 %		
stopping voltage [%]	50 %; non-adjustable		
start-up ramp time of soft starter	0 20 s		
ramp-down time of soft starter	0 20 s		
current limiting value [%] adjustable	130 700 %		
certificate of suitability			
CE marking	Yes		
UL approval	Yes		
CSA approval	Yes		
product component			
HMI-High Feature	No		
• is supported HMI-Standard	Yes		
<ul> <li>is supported HMI-High Feature</li> </ul>	Yes		
product feature integrated bypass contact system	Yes		
number of controlled phases	2		
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2		
buffering time in the event of power failure			
for main current circuit	100 ms		

for control circuit	100 ms	
insulation voltage rated value	600 V	
degree of pollution	3. acc. to IEC 60947-4-2	
impulse voltage rated value	6 kV	
blocking voltage of the thyristor maximum	1 600 V	
service factor	1	
surge voltage resistance rated value	6 kV	
maximum permissible voltage for protective separation	U KV	
between main and auxiliary circuit	600 V	
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting	
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz	
utilization category according to IEC 60947-4-2	AC-53a	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	09/23/2019	
product function	0012012010	
• ramp-up (soft starting)	Yes	
• ramp-down (soft stop)	Yes	
	Yes	
Soft Torque     adjustable current limitation	Yes	
adjustable current limitation	Yes	
pump ramp down     intrinsic device protection	Yes	
intrinsic device protection     motor overload protection		
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)	
evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick	
• auto-RESET	Yes	
• manual RESET	Yes	
• remote reset	Yes; By turning off the control supply voltage	
communication function	Yes	
operating measured value display	Yes; Only in conjunction with special accessories	
• error logbook	Yes; Only in conjunction with special accessories	
via software parameterizable	No	
via software configurable	Yes	
PROFlenergy	Yes; in connection with the PROFINET Standard communication module	
voltage ramp	Yes	
torque control	No	
analog output Power Electronics	No	
operational current	570 A	
• at 40 °C rated value	570 A	
• at 50 °C rated value	504 A	
at 60 °C rated value	460 A	
operating voltage	200 600 \/	
rated value	200 600 ∨ -15 %	
relative negative tolerance of the operating voltage	-15 %	
operating power for 3-phase motors	10 /0	
at 230 V at 40 °C rated value	160 kW	
• at 250 V at 40 °C rated value	315 kW	
• at 500 V at 40 °C rated value	315 kW	
Operating frequency 1 rated value	355 KVV 50 Hz	
Operating frequency 2 rated value	60 Hz	
relative negative tolerance of the operating frequency	-10 %	
relative negative tolerance of the operating frequency	10 %	
adjustable motor current		
at rotary coding switch on switch position 1	240 A	
at rotary coding switch on switch position 1	262 A	
at rotary coding switch on switch position 2     at rotary coding switch on switch position 3	202 A 284 A	
<ul> <li>at rotary coding switch on switch position 3</li> <li>at rotary coding switch on switch position 4</li> </ul>	306 A	
	306 A 328 A	
<ul> <li>at rotary coding switch on switch position 5</li> <li>at rotary coding switch on switch position 6</li> </ul>	328 A 350 A	
<ul> <li>at rotary coding switch on switch position 6</li> <li>at rotary coding switch on switch position 7</li> </ul>		
<ul> <li>at rotary coding switch on switch position 7</li> </ul>	372 A	

<ul> <li>at rotary coding switch on switch position 8</li> </ul>	394 A
<ul> <li>at rotary coding switch on switch position 9</li> </ul>	416 A
<ul> <li>at rotary coding switch on switch position 10</li> </ul>	438 A
<ul> <li>at rotary coding switch on switch position 11</li> </ul>	460 A
<ul> <li>at rotary coding switch on switch position 12</li> </ul>	482 A
<ul> <li>at rotary coding switch on switch position 13</li> </ul>	504 A
<ul> <li>at rotary coding switch on switch position 14</li> </ul>	526 A
<ul> <li>at rotary coding switch on switch position 15</li> </ul>	548 A
<ul> <li>at rotary coding switch on switch position 16</li> </ul>	570 A
• minimum	240 A
minimum load [%]	15 %; Relative to smallest settable le
power loss [W] for rated value of the current at AC	
● at 40 °C after startup	73 W
● at 50 °C after startup	57 W
● at 60 °C after startup	47 W
power loss [W] at AC at current limitation 350 %	
at 40 °C during startup	7 019 W
• at 50 °C during startup	5 801 W
● at 60 °C during startup	5 048 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
at 50 Hz rated value	24 V
<ul> <li>at 60 Hz rated value</li> </ul>	24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply voltage	
at DC rated value	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	160 mA
holding current in bypass operation rated value	490 mA
inrush current by closing the bypass contacts maximum	7.6 A
inrush current peak at application of control supply voltage maximum	3.3 A
duration of inrush current peak at application of control supply voltage	12.1 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of digital outputs	3
	5
<ul> <li>not parameterizable</li> </ul>	2
not parameterizable     digital output version	
	2
digital output version	2 2 normally-open contacts (NO) / 1 changeover contact (CO)
digital output version number of analog outputs	2 2 normally-open contacts (NO) / 1 changeover contact (CO)

stallation/ mounting/ dimensions		
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back	
fastening method	screw fixing	
height	230 mm	
width	160 mm	
depth	282 mm	
required spacing with side-by-side mounting		
• forwards	10 mm	
backwards	0 mm	
• upwards	100 mm	
downwards	75 mm	
at the side	5 mm	
weight without packaging	7.3 kg	
onnections/ Terminals		
type of electrical connection		
• for main current circuit	busbar connection	
for control circuit	screw-type terminals	
width of connection bar maximum	35 mm; with connection cover 3RT1966-4EA1 maximum length 45 mm	
wire length for thermistor connection		
<ul> <li>with conductor cross-section = 0.5 mm<sup>2</sup> maximum</li> </ul>	50 m	
• with conductor cross-section = 1.5 mm <sup>2</sup> maximum	150 m	
<ul> <li>with conductor cross-section = 2.5 mm<sup>2</sup> maximum</li> </ul>	250 m	
<ul> <li>type of connectable conductor cross-sections</li> <li>for main contacts for box terminal using the front clamping point solid</li> </ul>	95 300 mm²	
<ul> <li>for main contacts for box terminal using the front clamping point finely stranded with core end processing</li> </ul>	70 240 mm²	
<ul> <li>for main contacts for box terminal using the front clamping point finely stranded without core end processing</li> </ul>	70 240 mm²	
<ul> <li>for main contacts for box terminal using the front clamping point stranded</li> </ul>	95 300 mm²	
• for main contacts for box terminal using the back clamping point solid	120 240 mm <sup>2</sup>	
<ul> <li>for AWG cables for main contacts for box terminal using the back clamping point</li> <li>for main contacts for box terminal using both clamping</li> </ul>	250 500 kcmil min. 2x 70 mm², max. 2x 240 mm²	
<ul> <li>for main contacts for box terminal using both clamping</li> <li>for main contacts for box terminal using both clamping</li> </ul>	min. 2x 50 mm², max. 2x 185 mm²	
<ul> <li>points finely stranded with core end processing</li> <li>for main contacts for box terminal using both clamping</li> </ul>	min. 2x 50 mm², max. 2x 185 mm²	
<ul><li>points finely stranded without core end processing</li><li>for main contacts for box terminal using both clamping</li></ul>	min. 2x 70 mm², max. 2x 240 mm²	
<ul> <li>points stranded</li> <li>for main contacts for box terminal using the back</li> <li>damping point finally stranded with core and processing</li> </ul>	120 185 mm²	
<ul> <li>clamping point finely stranded with core end processing</li> <li>for main contacts for box terminal using the back clamping point finely stranded without core end processing</li> </ul>	120 185 mm²	
<ul> <li>for main contacts for box terminal using the back clamping point stranded</li> </ul>	120 240 mm²	
type of connectable conductor cross-sections		
<ul> <li>for AWG cables for main current circuit solid</li> </ul>	2/0 500 kcmil	
<ul> <li>for DIN cable lug for main contacts stranded</li> </ul>	50 240 mm <sup>2</sup>	
<ul> <li>for DIN cable lug for main contacts finely stranded</li> </ul>	70 240 mm²	
type of connectable conductor cross-sections		
for control circuit solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)	
<ul> <li>for control circuit finely stranded with core end processing</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)	
<ul> <li>for AWG cables for control circuit solid</li> </ul>	1x (20 12), 2x (20 14)	
wire length		
<ul> <li>between soft starter and motor maximum</li> </ul>	800 m	
<ul> <li>at the digital inputs at AC maximum</li> </ul>	1 000 m	
tightening torque		
<ul> <li>for main contacts with screw-type terminals</li> </ul>	14 24 N·m	
	0.8 1.2 N·m	

tightening torque [lbf·in]			
<ul> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type</li> </ul>	124 210 lbf-in		
terminals	7 10.3 lbf·in		
mbient conditions			
installation altitude at height above sea level maximum	5 000 m; derating as of 1000 m, see Manual		
ambient temperature			
<ul> <li>during operation</li> </ul>	-25 +60 °C; Please observe derating at temperatures of 40 °C or above		
<ul> <li>during storage and transport</li> </ul>	-40 +80 °C		
environmental category			
<ul> <li>during operation according to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6		
during storage according to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not ge inside the devices), 1M4		
<ul> <li>during transport according to IEC 60721</li> </ul>	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)		
EMC emitted interference	acc. to IEC 60947-4-2: Class A		
communication/ Protocol			
communication module is supported			
<ul> <li>PROFINET standard</li> </ul>	Yes		
EtherNet/IP	Yes		
Modbus RTU	Yes		
Modbus TCP	Yes		
PROFIBUS	Yes		
JL/CSA ratings			
manufacturer's article number			
<ul> <li>of the fuse</li> <li>— usable for Standard Faults up to 575/600 V</li> </ul>	Type: Class L, max. 1600 A; lq = 30 kA		
according to UL			
<ul> <li>— usable for High Faults up to 575/600 V according to UL</li> </ul>	Type: Class L, max. 1200 A; lq = 100 kA		
operating power [hp] for 3-phase motors			
• at 200/208 V at 50 °C rated value	150 hp		
<ul> <li>at 220/230 V at 50 °C rated value</li> </ul>	200 hp		
• at 460/480 V at 50 °C rated value	400 hp		
• at 575/600 V at 50 °C rated value	500 hp		
Safety related data			
protection class IP on the front according to IEC 60529	IP00; IP20 with cover		
touch protection on the front according to IEC 60529 TEX	finger-safe, for vertical contact from the front with cover		
certificate of suitability			
• ATEX	Yes		
• IECEx	Yes		
• UKEX	Yes		
hardware fault tolerance according to IEC 61508 relating to ATEX	0		
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.09		
PFHD with high demand rate according to EN 62061 relating to ATEX	9E-6 1/h		
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1		
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a		
Certificates/ approvals			
General Product Approval	For use in hazard- ous locations		
For use in hazardous locations Declaration of	f Conformity Test Certificates Marine / Shipping		
	reat vertilitätes marine / Shipping		











Type Test Certificates/Test Report



Marine / Shipping





**Confirmation** 

other

#### **Further information**

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5077-6TB05

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5077-6TB05

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5077-6TB05

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5077-6TB05&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5077-6TB05/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5077-6TB05&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

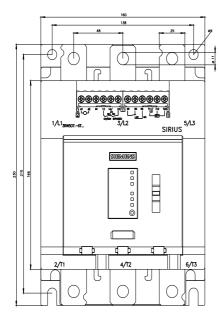

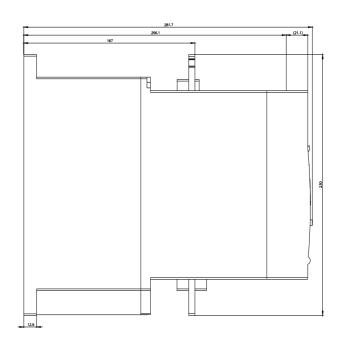

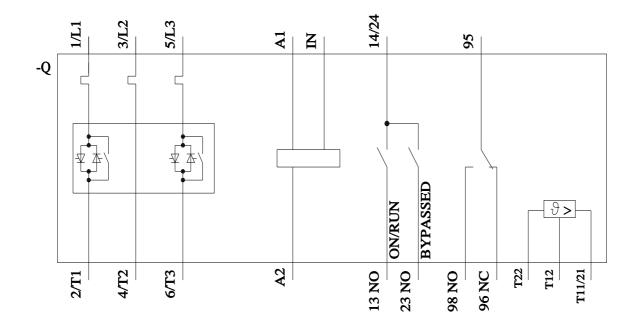

last modified:

1/14/2023 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: <u>3RW50776TB05</u>