SIEMENS

Data sheet 3RW5225-3TC04

SIRIUS



SIRIUS soft starter 200-480 V 63 A, 24 V AC/DC spring-type terminals Thermistor input



product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW52
manufacturer's article number	
 of standard HMI module usable 	3RW5980-0HS00
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2163-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V 	3VA2163-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10
 of circuit breaker usable at 400 V at inside-delta circuit 	3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V at inside-delta circuit 	3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10
 of the gG fuse usable up to 690 V 	3NA3830-6; Type of coordination 1, Iq = 65 kA
• of the gG fuse usable at inside-delta circuit up to 500 V	3NA3830-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1022-0; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE8024-1; Type of coordination 2, Iq = 65 kA
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
certificate of suitability	
• CE marking	Yes
 UL approval 	Yes
CSA approval	Yes
product component	
HMI-High Feature	No
• is supported HMI-Standard	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
buffering time in the event of power failure	

e for main ourrent sizerit	100 mg
for main current circuit for control circuit	100 ms
• for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
between main and auxiliary circuit	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	02/15/2018
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 1,6,7,8,9,14,15,16,17,17,18,18- Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10]octadeca-7,15-diene ("Dechlorane Plus"™) covering any of its individual anti- and syn-isomers or any combination thereof Dibutylbis(pentane-2,4-dionato-0,O')tin - 22673-19-4
product function	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
Soft Torque	Yes
adjustable current limitation	Yes
pump ramp down	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
 evaluation of thermistor motor protection 	Yes; Type A PTC or Klixon / Thermoclick
• inside-delta circuit	Yes
• auto-RESET	Yes
manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
 communication function 	Yes
 operating measured value display 	Yes; Only in conjunction with special accessories
• error logbook	Yes; Only in conjunction with special accessories
 via software parameterizable 	No
 via software configurable 	Yes
 PROFlenergy 	Yes; in connection with the PROFINET Standard communication module
• firmware update	Yes
 removable terminal for control circuit 	Yes
• torque control	No
analog output	No
Power Electronics	
operational current	
• at 40 °C rated value	63 A
• at 50 °C rated value	55.5 A
at 60 °C rated value	50.5 A
operational current at inside-delta circuit	
• at 40 °C rated value	109 A
• at 50 °C rated value	96 A
at 60 °C rated value	87.5 A
operating voltage	
rated value	200 480 V
at inside-delta circuit rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %
relative positive tolerance of the operating voltage at	10 %

!!-!!!4	
inside-delta circuit	
operating power for 3-phase motors	40.51114
• at 230 V at 40 °C rated value	18.5 kW
 at 230 V at inside-delta circuit at 40 °C rated value 	30 kW
 at 400 V at 40 °C rated value 	30 kW
at 400 V at inside-delta circuit at 40 °C rated value	55 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
 at rotary coding switch on switch position 1 	25.5 A
 at rotary coding switch on switch position 2 	28 A
 at rotary coding switch on switch position 3 	30.5 A
 at rotary coding switch on switch position 4 	33 A
 at rotary coding switch on switch position 5 	35.5 A
 at rotary coding switch on switch position 6 	38 A
 at rotary coding switch on switch position 7 	40.5 A
 at rotary coding switch on switch position 8 	43 A
• at rotary coding switch on switch position 9	45.5 A
at rotary coding switch on switch position 10	48 A
at rotary coding switch on switch position 11	50.5 A
at rotary coding switch on switch position 12	53 A
at rotary coding switch on switch position 13	55.5 A
at rotary coding switch on switch position 14	58 A
at rotary coding switch on switch position 15	60.5 A
at rotary coding switch on switch position 16	63 A
• minimum	25.5 A
adjustable motor current	
for inside-delta circuit at rotary coding switch on switch position 1	44.2 A
 for inside-delta circuit at rotary coding switch on switch position 2 	48.5 A
 for inside-delta circuit at rotary coding switch on switch position 3 	52.8 A
 for inside-delta circuit at rotary coding switch on switch position 4 	57.2 A
 for inside-delta circuit at rotary coding switch on switch position 5 	61.5 A
 for inside-delta circuit at rotary coding switch on switch position 6 	65.8 A
 for inside-delta circuit at rotary coding switch on switch position 7 	70.1 A
for inside-delta circuit at rotary coding switch on switch position 8 for inside delta circuit at rotary coding switch on switch position 8	74.5 A
 for inside-delta circuit at rotary coding switch on switch position 9 for inside-delta circuit at rotary coding switch on switch 	78.8 A 83.1 A
position 10 • for inside-delta circuit at rotary coding switch on switch	87.5 A
position 11 • for inside-delta circuit at rotary coding switch on switch	91.8 A
position 12 • for inside-delta circuit at rotary coding switch on switch	96.1 A
position 13 • for inside-delta circuit at rotary coding switch on switch	100 A
position 14 • for inside-delta circuit at rotary coding switch on switch position 15	105 A
for inside-delta circuit at rotary coding switch on switch position 16	109 A
at inside-delta circuit minimum	44.2 A
minimum load [%]	15 %; Relative to smallest settable le
power loss [W] for rated value of the current at AC	10 70, 1 Clausto to official octions to
at 40 °C after startup	31 W
▼ at TO U atter startub	O I VV

a at 60 °C after startup	27 W
• at 60 °C after startup	ZIW
power loss [W] at AC at current limitation 350 %	992 W
• at 40 °C during startup	882 W
• at 50 °C during startup	744 W
at 60 °C during startup	659 W
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
at 50 Hz rated value	24 V
at 60 Hz rated value	24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply voltage at DC	
rated value	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	160 mA
holding current in bypass operation rated value	380 mA
inrush current by closing the bypass contacts maximum	7.6 A
inrush current peak at application of control supply voltage maximum	3.3 A
duration of inrush current peak at application of control supply voltage	12.1 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of digital outputs	3
not parameterizable	2
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	0
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	+/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface
fastening method	screw fixing
height	306 mm
width	185 mm
depth	203 mm
required spacing with side-by-side mounting	
forwards	10 mm
backwards	0 mm
• upwards	100 mm
downwards	75 mm
at the side	5 mm
weight without packaging	5.6 kg
Connections/ Terminals	

type of electrical connection	
for main current circuit	box terminal
for control circuit	spring-loaded terminals
width of connection bar maximum	25 mm
wire length for thermistor connection	
 with conductor cross-section = 0.5 mm² maximum 	50 m
 with conductor cross-section = 1.5 mm² maximum 	150 m
with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections for main contacts for box terminal	
 using the front clamping point solid 	1x (2.5 16 mm²)
 using the front clamping point finely stranded with core end processing 	1x (2.5 50 mm²)
 using the front clamping point stranded 	1x (10 70 mm²)
 using the back clamping point solid 	1x (2.5 16 mm²)
 r box terminal using the back clamping point 	1x (10 2/0)
 using both clamping points solid 	2x (2.5 16 mm²)
 using both clamping points finely stranded with core end processing 	2x (2.5 35 mm²)
 using both clamping points stranded 	2x (6 16 mm²), 2x (10 50 mm²)
 using the back clamping point finely stranded with core end processing 	1x (2.5 50 mm²)
using the back clamping point stranded	1x (10 70 mm²)
type of connectable conductor cross-sections	
for control circuit solid	2x (0.25 1.5 mm²)
 for control circuit finely stranded with core end processing 	2x (0.25 1.5 mm²)
 for AWG cables for control circuit solid 	2x (24 16)
 for AWG cables for control circuit finely stranded with core end processing 	2x (24 16)
wire length	
 between soft starter and motor maximum 	800 m
 at the digital inputs at AC maximum 	100 m
at the digital inputs at DC maximum	1 000 m
tightening torque	
 for main contacts with screw-type terminals 	4.5 6 N·m
 for auxiliary and control contacts with screw-type terminals 	0.8 1.2 N·m
tightening torque [lbf·in]	
 for main contacts with screw-type terminals 	40 53 lbf-in
for auxiliary and control contacts with screw-type terminals	7 10.3 lbf·in
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
 during operation according to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
 during storage according to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
Environmental footprint	
Siemens Eco Profile (SEP)	Siemens EcoTech
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
PROFINET standard	Yes
EtherNet/IP	
 Modbus RTU 	Yes
	Yes Yes
Modbus TCP	
Modbus TCP PROFIBUS UL/CSA ratings	Yes

manufacturer's article number • of circuit breaker usable for Standard Faults - at 460/480 V according to UL Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 10 kA - 60/480 V according to UL Siemens type: 3VA51, max. 125 A; Iq max = 65 kA Siemens type: 3VA51, max. 125 A; Iq = 10 kA - at 460/480 V at inside-delta circuit according to UL - 60/480 V at inside-delta circuit according to UL Siemens type: 3VA51, max. 125 A; Iq max = 65 kA - at 575/600 V according to UL Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 10 kA - at 575/600 V at inside-delta circuit according to UL Siemens type: 3VA51, max. 125 A; Iq = 10 kA • of the fuse — usable for Standard Faults up to 575/600 V Type: Class RK5 / K5, max. 200 A; Iq = 10 kA according to UL - usable for High Faults up to 575/600 V according to Type: Class J / L, max. 225 A; Iq = 100 kA — usable for Standard Faults at inside-delta circuit up Type: Class RK5 / K5, max. 200 A; Iq = 10 kA to 575/600 V according to UL - usable for High Faults at inside-delta circuit up to Type: Class J / L, max. 225 A; Iq = 100 kA 575/600 V according to UL operating power [hp] for 3-phase motors • at 200/208 V at 50 °C rated value 15 hp • at 220/230 V at 50 °C rated value 20 hp • at 460/480 V at 50 °C rated value 40 hp • at 200/208 V at inside-delta circuit at 50 °C rated value 30 hp • at 220/230 V at inside-delta circuit at 50 °C rated value 30 hp

75 hp

R300-B300

IP00; IP20 with cover

touch protection on the front according to IEC 60529 Approvals Certificates

Electrical Safety

General Product Approval





• at 460/480 V at inside-delta circuit at 50 °C rated value

contact rating of auxiliary contacts according to UL

protection class IP on the front according to IEC 60529

Confirmation



finger-safe, for vertical contact from the front with cover





General Product Approval

EMV

Test Certificates

Marine / Shipping





KC

Type Test Certificates/Test Report





Marine / Shipping

other

Environment







Confirmation





Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5225-3TC04

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5225-3TC04

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5225-3TC04


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5225-3TC04&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


Characteristic: Installation altitude

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5225-3TC04&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)
https://support.industry.siemens.com/cs/ww/en/view/101494917

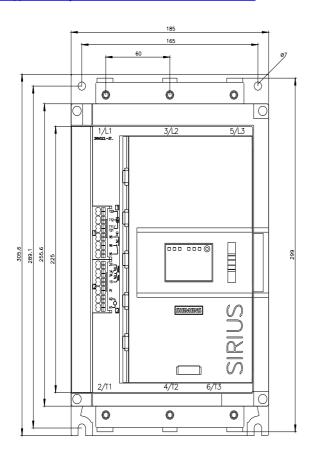

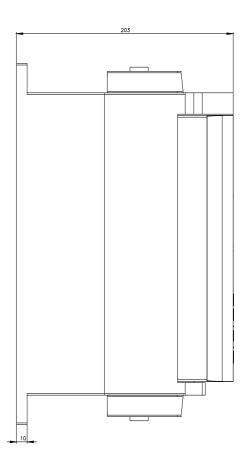

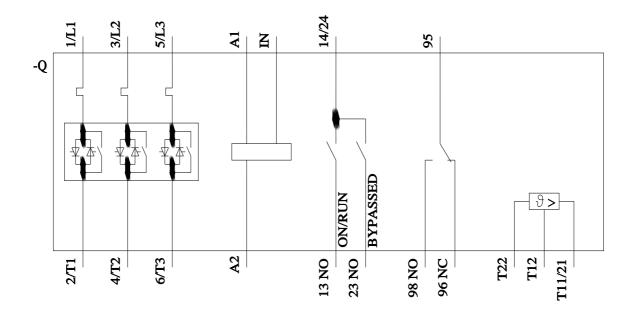

last modified: 4/19/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RW52253TC04