# SIEMENS

#### Data sheet

### 3RW5244-2TC05



SIRIUS soft starter 200-600 V 250 A, 24 V AC/DC spring-type terminals Thermistor input

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW52
manufacturer's article number	
<ul> <li>of standard HMI module usable</li> </ul>	<u>3RW5980-0HS00</u>
<ul> <li>of high feature HMI module usable</li> </ul>	<u>3RW5980-0HF00</u>
<ul> <li>of communication module PROFINET standard usable</li> </ul>	<u>3RW5980-0CS00</u>
<ul> <li>of communication module PROFIBUS usable</li> </ul>	<u>3RW5980-0CP00</u>
<ul> <li>of communication module Modbus TCP usable</li> </ul>	<u>3RW5980-0CT00</u>
<ul> <li>of communication module Modbus RTU usable</li> </ul>	<u>3RW5980-0CR00</u>
<ul> <li>of communication module Ethernet/IP</li> </ul>	<u>3RW5980-0CE00</u>
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> </ul>	3VA2450-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V at inside-delta circuit</li> </ul>	3VA2450-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3354-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of the gG fuse usable at inside-delta circuit up to 500 V</li> </ul>	2x3NA3354-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE1331-0; Type of coordination 2, Iq = 65 kA</u>
• of back up P fuse link for comiconductor protection	2NE2226: Type of exercise 2, la = 65 kA

 $\bullet$  of back-up R fuse link for semiconductor protection usable up to 690 V

3NE3336; Type of coordination 2, Iq = 65 kA

#### General technical data

General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	No
<ul> <li>is supported HMI-Standard</li> </ul>	Yes
<ul> <li>is supported HMI-High Feature</li> </ul>	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A (default) / 10E / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	
for main current circuit	100 ms
<ul> <li>for control circuit</li> </ul>	100 ms


insulation voltage rated value	600 V		
degree of pollution	3, acc. to IEC 60947-4-2		
impulse voltage rated value	6 kV		
blocking voltage of the thyristor maximum	1 600 V		
service factor	1		
surge voltage resistance rated value	6 kV		
maximum permissible voltage for protective separation			
between main and auxiliary circuit	600 V		
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting		
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz		
	AC 53a		
utilization category according to IEC 60947-4-2			
reference code according to IEC 81346-2	Q		
Substance Prohibitance (Date)	02/15/2018		
product function			
<ul> <li>ramp-up (soft starting)</li> </ul>	Yes		
<ul> <li>ramp-down (soft stop)</li> </ul>	Yes		
Soft Torque	Yes		
<ul> <li>adjustable current limitation</li> </ul>	Yes		
• pump ramp down	Yes		
intrinsic device protection	Yes		
<ul> <li>motor overload protection</li> </ul>	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)		
<ul> <li>evaluation of thermistor motor protection</li> </ul>	Yes; Type A PTC or Klixon / Thermoclick		
inside-delta circuit	Yes		
auto-RESET	Yes		
manual RESET	Yes		
remote reset	Yes; By turning off the control supply voltage		
communication function	Yes		
operating measured value display	Yes; Only in conjunction with special accessories		
error logbook     via software parameterizable	Yes; Only in conjunction with special accessories		
via software parameterizable	No		
• via software configurable	Yes		
PROFlenergy	Yes; in connection with the PROFINET Standard communication module		
firmware update	Yes		
removable terminal for control circuit	Yes		
torque control	No		
analog output	No		
Power Electronics			
operational current			
• at 40 °C rated value	250 A		
• at 50 °C rated value	220 A		
• at 60 °C rated value	200 A		
operational current at inside-delta circuit			
<ul> <li>at 40 °C rated value</li> </ul>	433 A		
• at 50 °C rated value	381 A		
at 60 °C rated value	346 A		
operating voltage			
rated value	200 600 V		
at inside-delta circuit rated value	200 600 V		
relative negative tolerance of the operating voltage	-15 %		
	-15 %		
relative positive tolerance of the operating voltage			
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %		
relative positive tolerance of the operating voltage at inside-delta circuit	10 %		
operating power for 3-phase motors			
<ul> <li>at 230 V at 40 °C rated value</li> </ul>	75 kW		
<ul> <li>at 230 V at 40 °C rated value</li> <li>at 230 V at inside-delta circuit at 40 °C rated value</li> </ul>	75 kW 132 kW		
$\bullet$ at 230 V at inside-delta circuit at 40 $^\circ C$ rated value	132 kW		
<ul> <li>at 230 V at inside-delta circuit at 40 °C rated value</li> <li>at 400 V at 40 °C rated value</li> </ul>	132 kW 132 kW		


Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
elative positive tolerance of the operating frequency	10 %
adjustable motor current	
at rotary coding switch on switch position 1	100 A
at rotary coding switch on switch position 2	110 A
<ul> <li>at rotary coding switch on switch position 3</li> </ul>	120 A
<ul> <li>at rotary coding switch on switch position 4</li> </ul>	130 A
<ul> <li>at rotary coding switch on switch position 5</li> </ul>	140 A
<ul> <li>at rotary coding switch on switch position 6</li> </ul>	150 A
<ul> <li>at rotary coding switch on switch position 7</li> </ul>	160 A
<ul> <li>at rotary coding switch on switch position 8</li> </ul>	170 A
<ul> <li>at rotary coding switch on switch position 9</li> </ul>	180 A
<ul> <li>at rotary coding switch on switch position 10</li> </ul>	190 A
<ul> <li>at rotary coding switch on switch position 11</li> </ul>	200 A
<ul> <li>at rotary coding switch on switch position 12</li> </ul>	210 A
<ul> <li>at rotary coding switch on switch position 13</li> </ul>	220 A
<ul> <li>at rotary coding switch on switch position 14</li> </ul>	230 A
<ul> <li>at rotary coding switch on switch position 15</li> </ul>	240 A
<ul> <li>at rotary coding switch on switch position 16</li> </ul>	250 A
• minimum	100 A
djustable motor current	
<ul> <li>for inside-delta circuit at rotary coding switch on switch position 1</li> </ul>	173 A
<ul> <li>for inside-delta circuit at rotary coding switch on switch position 2</li> </ul>	191 A
<ul> <li>for inside-delta circuit at rotary coding switch on switch position 3</li> </ul>	208 A
<ul> <li>for inside-delta circuit at rotary coding switch on switch position 4</li> </ul>	225 A
• for inside-delta circuit at rotary coding switch on switch position 5	242 A
<ul> <li>for inside-delta circuit at rotary coding switch on switch position 6</li> </ul>	260 A
<ul> <li>for inside-delta circuit at rotary coding switch on switch position 7</li> <li>for inside-delta circuit at rotary coding switch on switch</li> </ul>	277 A 294 A
<ul> <li>for inside-delta circuit at rotary coding switch on switch</li> <li>for inside-delta circuit at rotary coding switch on switch</li> </ul>	312 A
<ul> <li>of inside-delta circuit at rotary coding switch on switch</li> <li>for inside-delta circuit at rotary coding switch on switch</li> </ul>	329 A
<ul> <li>position 10</li> <li>for inside-delta circuit at rotary coding switch on switch</li> </ul>	346 A
position 11 <ul> <li>for inside-delta circuit at rotary coding switch on switch</li> </ul>	364 A
<ul><li>position 12</li><li>for inside-delta circuit at rotary coding switch on switch</li></ul>	381 A
<ul> <li>position 13</li> <li>for inside-delta circuit at rotary coding switch on switch</li> </ul>	398 A
<ul> <li>position 14</li> <li>for inside-delta circuit at rotary coding switch on switch position 15</li> </ul>	416 A
<ul> <li>for inside-delta circuit at rotary coding switch on switch position 16</li> </ul>	433 A
at inside-delta circuit minimum	173 A
ninimum load [%]	15 %; Relative to smallest settable le
ower loss [W] for rated value of the current at AC	
• at 40 °C after startup	87 W
• at 50 °C after startup	78 W
• at 60 °C after startup	72 W
power loss [W] at AC at current limitation 350 %	
• at 40 °C during startup	3 818 W
• at 50 °C during startup	3 188 W
• at 60 °C during startup	2 799 W

Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
• at 50 Hz rated value	24 V
at 60 Hz rated value	24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply voltage	
at DC rated value	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	160 mA
holding current in bypass operation rated value	470 mA
inrush current by closing the bypass contacts maximum	7.6 A
inrush current peak at application of control supply voltage maximum	3.3 A
duration of inrush current peak at application of control supply voltage	12.1 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of digital outputs	3
not parameterizable	2
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	
switching capacity current of the relay outputs	0
at AC-15 at 250 V rated value	3 A
at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	393 mm
width	210 mm
depth	203 mm
required spacing with side-by-side mounting	
● forwards	10 mm
<ul> <li>backwards</li> </ul>	0 mm
• upwards	100 mm
downwards	75 mm
• at the side	5 mm
weight without packaging	9.9 kg
Connections/ Terminals	
type of electrical connection	
for main current circuit	busbar connection
for control circuit	spring-loaded terminals
width of connection bar maximum	45 mm
wire length for thermistor connection	

	50
• with conductor cross-section = 0.5 mm <sup>2</sup> maximum	50 m
• with conductor cross-section = 1.5 mm <sup>2</sup> maximum	150 m
• with conductor cross-section = 2.5 mm <sup>2</sup> maximum	250 m
type of connectable conductor cross-sections	0 (50 040 2)
for DIN cable lug for main contacts stranded	2x (50 240 mm <sup>2</sup> )
for DIN cable lug for main contacts finely stranded	2x (70 240 mm²)
type of connectable conductor cross-sections	
for control circuit solid	2x (0.25 1.5 mm <sup>2</sup> )
for control circuit finely stranded with core end processing	2x (0.25 1.5 mm <sup>2</sup> )
for AWG cables for control circuit solid	2x (24 16)
<ul> <li>for AWG cables for control circuit finely stranded with core end processing</li> </ul>	2x (24 16)
wire length	
<ul> <li>between soft starter and motor maximum</li> </ul>	800 m
<ul> <li>at the digital inputs at AC maximum</li> </ul>	100 m
<ul> <li>at the digital inputs at DC maximum</li> </ul>	1 000 m
tightening torgue	
for main contacts with screw-type terminals	14 24 N·m
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	0.8 1.2 N·m
terminals	
tightening torque [lbf·in]	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	124 210 lbf·in
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
<ul> <li>during operation according to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
during storage according to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
<ul> <li>during transport according to IEC 60721</li> </ul>	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
PROFINET standard	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
of circuit breaker	
<ul> <li>usable for Standard Faults at 460/480 V according to UL</li> </ul>	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA
— usable for High Faults at 460/480 V according to UL	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; lq max = 65 kA
— usable for Standard Faults at 460/480 V at inside- delta circuit according to UL	Siemens type: 3VA54, max. 600 A; Iq = 18 kA
<ul> <li>— usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> </ul>	Siemens type: 3VA54, max. 600 A; Iq max = 65 kA
<ul> <li>— usable for Standard Faults at 575/600 V according to UL</li> </ul>	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA
<ul> <li>usable for Standard Faults at 575/600 V at inside- delta circuit according to UL</li> <li>of the fues</li> </ul>	Siemens type: 3VA54, max. 600 A; Iq = 18 kA
<ul> <li>of the fuse         <ul> <li>usable for Standard Faults up to 575/600 V</li></ul></li></ul>	Type: Class J / L, max. 800 A; Iq = 18 kA
— usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 800 A; Iq = 100 kA
<ul> <li>— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 800 A; lq = 18 kA

<ul> <li>— usable for High Faults at inside-delt 575/600 V according to UL</li> </ul>			$l_{m} = 100 l_{c} \Lambda$		
	a circuit up to	Type: Class J / L, max. 800 A;	Iq = 100 KA		
operating power [hp] for 3-phase motors					
• at 200/208 V at 50 °C rated value		60 hp			
<ul> <li>at 220/230 V at 50 °C rated value</li> </ul>		75 hp			
<ul> <li>at 460/480 V at 50 °C rated value</li> </ul>		150 hp			
• at 575/600 V at 50 °C rated value		200 hp			
<ul> <li>at 300/208 V at inside-delta circuit at 50 °C</li> </ul>	C rated value	125 hp			
<ul> <li>at 220/208 V at inside-delta circuit at 50</li> <li>at 220/230 V at inside-delta circuit at 50 °</li> </ul>					
		150 hp			
• at 460/480 V at inside-delta circuit at 50 °		300 hp			
• at 575/600 V at inside-delta circuit at 50		350 hp			
contact rating of auxiliary contacts accordin	g to UL	R300-B300			
Safety related data		1000 1000 111	_		
protection class IP on the front according to		IP00; IP20 with cover			
touch protection on the front according to IE	EC 60529	finger-safe, for vertical contact	from the front with cover		
electromagnetic compatibility		in accordance with IEC 60947	-4-2		
Certificates/ approvals					
General Product Approval				EMC	
	Confirmatio			~	
		(U <sub>I</sub> )	LUI	<i>κ</i> λ	
			LUL	يع	
CSA CCC		UL		RCM	
Declaration of Conformity	Test Certificate	es Marine / Shipping			
	Type Test Cer	tific-	States.		
UK (f	ates/Test Rep	<u>port</u>	(i - 12) i	Lloyds	
		and the second		T CONSTRAINTS	
EG-Konf.		ABS	BUREAU	LRS	
			VERITAS		
Marine / Shipping other					
marme / onipping other					
<u>Confirmation</u>					
(33)					
PRS					
Further information Siemens has decided to exit the Russian ma		wwn-russian-husiness			
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea	se/siemens-wind-do				
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the	se/siemens-wind-do irrent EAC certifica status of validity of	ites. the EAC certification if you inten	d to import or offer to supp	ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned	se/siemens-wind-do irrent EAC certifica status of validity of	ites. the EAC certification if you inten	d to import or offer to supp	ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging	se/siemens-wind-do irrent EAC certificates status of validity of EAEU member sta	ites. the EAC certification if you inten	d to import or offer to supp	ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned	se/siemens-wind-do rrent EAC certifica status of validity of EAEU member sta view/109813875	ites. the EAC certification if you inten	d to import or offer to supp	ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/ww/en/	se/siemens-wind-do rrent EAC certifica status of validity of EAEU member sta view/109813875	ites. the EAC certification if you inten	d to import or offer to supp	ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/ww/en/ Information- and Downloadcenter (Catalogs, https://www.siemens.com/ic10 Industry Mall (Online ordering system)	se/siemens-wind-do rrent EAC certifica status of validity of EAEU member sta view/109813875 Brochures,)	<b>ites.</b> the EAC certification if you inten tes Russia or Belarus).	d to import or offer to supp	ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/ww/en/ Information- and Downloadcenter (Catalogs, https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Ca	se/siemens-wind-do rrent EAC certifica status of validity of EAEU member sta view/109813875 Brochures,)	<b>ites.</b> the EAC certification if you inten tes Russia or Belarus).	d to import or offer to supp	ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/ww/en/ Information- and Downloadcenter (Catalogs, https://www.siemens.com/ic10 Industry Mall (Online ordering system)	se/siemens-wind-do rrent EAC certifica status of validity of I EAEU member sta view/109813875 Brochures,) atalog/product?mlfb=	tes. the EAC certification if you inten tes Russia or Belarus). =3RW5244-2TC05		ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/ww/en/ Information- and Downloadcenter (Catalogs, https://www.siemens.com/c10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Ca Cax online generator http://support.automation.siemens.com/WW/CA	se/siemens-wind-do rrent EAC certifica status of validity of EAEU member sta view/109813875 Brochures,) atalog/product?mlfb= Xorder/default.aspx aracteristics, FAQs	tes. the EAC certification if you inten tes Russia or Belarus). =3RW5244-2TC05 ?lang=en&mlfb=3RW5244-2TC0 )		ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/ww/en/ Information- and Downloadcenter (Catalogs, https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Ca Cax online generator http://support.automation.siemens.com/WW/CA Service&Support (Manuals, Certificates, Cha https://support.industry.siemens.com/cs/ww/en/ Image database (product images, 2D dimension)	se/siemens-wind-do rrent EAC certifica status of validity of EAEU member sta view/109813875 Brochures,) atalog/product?mlfb= Xorder/default.aspx aracteristics, FAQs ps/3RW5244-2TC05 sion drawings, 3D r	tes. the EAC certification if you inten tes Russia or Belarus). =3RW5244-2TC05 ?lang=en&mlfb=3RW5244-2TC0 ;) 5 models, device circuit diagram	) <u>5</u>	ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/vw/en/ Information- and Downloadcenter (Catalogs https://www.siemens.com/c10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Ca Cax online generator http://support.automation.siemens.com/VW/CA Service&Support (Manuals, Certificates, Cha https://support.industry.siemens.com/cs/ww/en/	se/siemens-wind-do rrent EAC certifica status of validity of EAEU member sta view/109813875 Brochures,) atalog/product?mlfb= Xorder/default.aspx aracteristics, FAQs ps/3RW5244-2TC09 sion drawings, 3D r _de.aspx?mlfb=3RV	tes. the EAC certification if you inten tes Russia or Belarus). =3RW5244-2TC05 ?lang=en&mlfb=3RW5244-2TC0 ;) 5 models, device circuit diagram V5244-2TC05⟨=en	) <u>5</u>	ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/ww/en/ Information- and Downloadcenter (Catalogs https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Ca Cax online generator http://support.automation.siemens.com/WW/CA Service&Support (Manuals, Certificates, Cha https://support.industry.siemens.com/cs/ww/en/ Image database (product images, 2D dimens http://www.automation.siemens.com/bilddb/cax Characteristic: Tripping characteristics, I²t, I https://support.industry.siemens.com/cs/ww/en/	se/siemens-wind-do rrent EAC certifica status of validity of EAEU member sta view/109813875 Brochures,) atalog/product?mlfb= Xorder/default.aspx aracteristics, FAQs ps/3RW5244-2TC09 sion drawings, 3D r de.aspx?mlfb=3RV -et-through curren	tes. the EAC certification if you inten tes Russia or Belarus). =3RW5244-2TC05 ?lang=en&mlfb=3RW5244-2TC0 ) 5 models, device circuit diagram V5244-2TC05⟨=en t	) <u>5</u>	ly these products to an	
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/ww/en/ Information- and Downloadcenter (Catalogs https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Ca Cax online generator http://support.automation.siemens.com/WW/CA Service&Support (Manuals, Certificates, Cha https://support.industry.siemens.com/cs/ww/en/ Image database (product images, 2D dimens http://www.automation.siemens.com/bilddb/cax Characteristic: Tripping characteristics, I²t, I https://support.industry.siemens.com/cs/ww/en/ Characteristic: Installation altitude	se/siemens-wind-do rrent EAC certifica status of validity of l EAEU member sta view/109813875 Brochures,) atalog/product?mlfb= Xorder/default.aspx aracteristics, FAQs ps/3RW5244-2TC05 sion drawings, 3D r _de.aspx?mlfb=3RW _et-through curren ps/3RW5244-2TC05	tes. the EAC certification if you inten tes Russia or Belarus). =3RW5244-2TC05 ?lang=en&mlfb=3RW5244-2TC0 ) 5 models, device circuit diagram <u>V5244-2TC05⟨=en</u> t 5/char	9 <u>5</u> s, EPLAN macros,)		
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/ww/en/ Information- and Downloadcenter (Catalogs, https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Ca Cax online generator http://support.automation.siemens.com/WW/CA Service&Support (Manuals, Certificates, Cha https://support.industry.siemens.com/cs/ww/en/ Image database (product images, 2D dimens http://www.automation.siemens.com/cs/ww/en/ Characteristic: Tripping characteristics, I²t, I https://support.industry.siemens.com/cs/ww/en/ Characteristic: Installation altitude http://www.automation.siemens.com/bilddb/inde	se/siemens-wind-do rrent EAC certifica status of validity of l EAEU member sta view/109813875 Brochures,) atalog/product?mlfb= Xorder/default.aspx aracteristics, FAQs ps/3RW5244-2TC05 sion drawings, 3D r _de.aspx?mlfb=3RW _et-through curren ps/3RW5244-2TC05	tes. the EAC certification if you inten tes Russia or Belarus). =3RW5244-2TC05 ?lang=en&mlfb=3RW5244-2TC0 ) 5 models, device circuit diagram <u>V5244-2TC05⟨=en</u> t 5/char	9 <u>5</u> s, EPLAN macros,)		
Siemens has decided to exit the Russian ma https://press.siemens.com/global/en/pressrelea Siemens is working on the renewal of the cu Please contact your local Siemens office on the EAC relevant market (other than the sanctioned Information on the packaging https://support.industry.siemens.com/cs/ww/en/ Information- and Downloadcenter (Catalogs https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Ca Cax online generator http://support.automation.siemens.com/WW/CA Service&Support (Manuals, Certificates, Cha https://support.industry.siemens.com/cs/ww/en/ Image database (product images, 2D dimens http://www.automation.siemens.com/bilddb/cax Characteristic: Tripping characteristics, I²t, I https://support.industry.siemens.com/cs/ww/en/ Characteristic: Installation altitude	se/siemens-wind-do rrent EAC certifica status of validity of l EAEU member sta view/109813875 Brochures,) atalog/product?mlfb= Xorder/default.aspx aracteristics, FAQs ps/3RW5244-2TCO sion drawings, 3D r _de.aspx?mlfb=3RV _et-through curren ps/3RW5244-2TCO ex.aspx?view=Searco	tes. the EAC certification if you inten tes Russia or Belarus). =3RW5244-2TC05 ?lang=en&mlfb=3RW5244-2TC0 ) 5 models, device circuit diagram <u>V5244-2TC05⟨=en</u> t 5/char	9 <u>5</u> s, EPLAN macros,)		

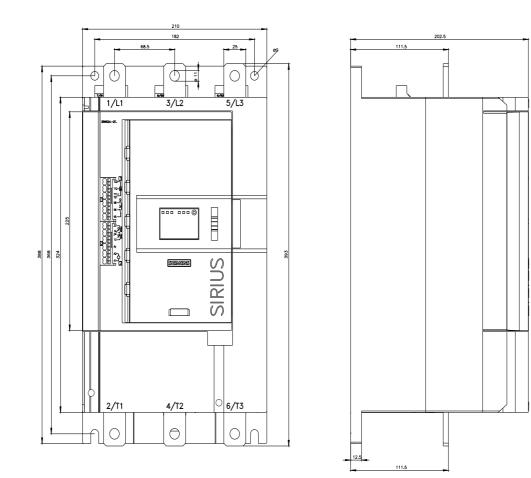

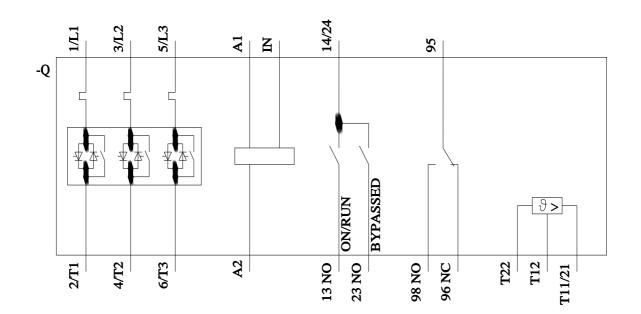

1/14/2023 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RW52442TC05