# SIEMENS

#### Data sheet

### 3RW5545-2HF14



SIRIUS soft starter 200-480 V 315 A, 110-250 V AC, spring-type terminals Failsafe

Figure similar

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Failsafe soft starters
product type designation	3RW55
manufacturer's article number	
<ul> <li>of high feature HMI module usable</li> </ul>	<u>3RW5980-0HF00</u>
<ul> <li>of communication module PROFINET standard usable</li> </ul>	<u>3RW5980-0CS00</u>
<ul> <li>of communication module PROFINET high-feature usable</li> </ul>	<u>3RW5950-0CH00</u>
<ul> <li>of communication module PROFIBUS usable</li> </ul>	<u>3RW5980-0CP00</u>
<ul> <li>of communication module Modbus TCP usable</li> </ul>	<u>3RW5980-0CT00</u>
<ul> <li>of communication module Modbus RTU usable</li> </ul>	<u>3RW5980-0CR00</u>
<ul> <li>of communication module Ethernet/IP</li> </ul>	<u>3RW5980-0CE00</u>
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	<u>3VA2440-7MN32-0AA0: Type of coordination 1. Iq = 65 kA. CLASS 10</u>
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2440-7MN32-0AA0: Type of coordination 1. Iq = 65 kA. CLASS 10
<ul> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> </ul>	3VA2580-6HN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V at inside-delta circuit</li> </ul>	3VA2580-6HN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of the gG fuse usable at inside-delta circuit up to 500 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE1334-2; Type of coordination 2, Iq = 65 kA</u>
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE3336: Type of coordination 2, Iq = 65 kA</u>
<ul> <li>of the redundant contactor for applications &gt; SIL 1 according to EN 62061</li> </ul>	<u>3RT1076</u>
<ul> <li>of the redundant contactor for applications &gt; SIL 1 at inside-delta circuit according to EN 62061</li> </ul>	<u>3RT1076</u>
<ul> <li>of the redundant contactor for applications &gt; SIL 1 according to EN ISO 13849-1</li> </ul>	3TF68
<ul> <li>of the redundant contactor for applications &gt; SIL 1 at inside-delta circuit according to EN ISO 13849-1</li> </ul>	3TF68
General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s

number of parameter sets	3
accuracy class	5 (based on IEC 61557-12)
certificate of suitability	
• CE marking	Yes
• UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
buffering time in the event of power failure	
for main current circuit	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	0 KV
between main and auxiliary circuit	480 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
recovery time after overload trip adjustable	60 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	11/22/2019
product function	11/2/2013
ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
<ul> <li>breakaway pulse</li> </ul>	Yes
adjustable current limitation	Yes
creep speed in both directions of rotation	Yes
pump ramp down	Yes
DC braking	Yes
motor heating	Yes
slave pointer function	Yes
trace function	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
<ul> <li>evaluation of thermistor motor protection</li> </ul>	Yes; Type A PTC or Klixon / Thermoclick
inside-delta circuit	Yes
• auto-RESET	Yes
manual RESET	Yes
remote reset	Yes
communication function	Yes
operating measured value display	Yes
event list	Yes
• error logbook	Yes
via software parameterizable	Yes
via software configurable	Yes
screw terminal	No
spring-loaded terminal	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules

a firmulare undete	Yes
<ul> <li>firmware update</li> <li>removable terminal for control circuit</li> </ul>	Yes
	Yes
voltage ramp	
torque control	Yes
combined braking	
analog output	Yes; 4 20 mA (default) / 0 10 V
programmable control inputs/outputs	Yes
condition monitoring	Yes
automatic parameterisation	Yes
application wizards	Yes
alternative run-down	Yes
emergency operation mode	Yes
reversing operation	Yes
soft starting at heavy starting conditions	Yes
Power Electronics	
operational current	
• at 40 °C rated value	315 A
at 40 °C rated value minimum	63 A
• at 50 °C rated value	279 A
at 60 °C rated value	255 A
operational current at inside-delta circuit	
• at 40 °C rated value	546 A
<ul> <li>at 50 °C rated value</li> </ul>	483 A
at 60 °C rated value	442 A
operating voltage	
rated value	200 480 V
at inside-delta circuit rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %
relative positive tolerance of the operating voltage at inside-delta circuit	10 %
operating power for 3-phase motors	
<ul> <li>at 230 V at 40 °C rated value</li> </ul>	90 kW
<ul> <li>at 230 V at inside-delta circuit at 40 °C rated value</li> </ul>	160 kW
● at 400 V at 40 °C rated value	160 kW
<ul> <li>at 400 V at inside-delta circuit at 40 °C rated value</li> </ul>	315 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
minimum load [%]	10 %; Relative to set le
power loss [W] for rated value of the current at AC	
● at 40 °C after startup	95 W
● at 50 °C after startup	84 W
	77 W
at 60 °C after startup	
power loss [W] at AC at current limitation 350 %	4 966 W
power loss [W] at AC at current limitation 350 % • at 40 °C during startup	
<ul> <li>power loss [W] at AC at current limitation 350 %</li> <li>at 40 °C during startup</li> <li>at 50 °C during startup</li> </ul>	4 153 W
<ul> <li>power loss [W] at AC at current limitation 350 %</li> <li>at 40 °C during startup</li> <li>at 50 °C during startup</li> <li>at 60 °C during startup</li> </ul>	3 646 W
power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         type of the motor protection	
<ul> <li>power loss [W] at AC at current limitation 350 %</li> <li>at 40 °C during startup</li> <li>at 50 °C during startup</li> <li>at 60 °C during startup</li> </ul>	3 646 W
power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         type of the motor protection	3 646 W
power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         type of the motor protection         Control circuit/ Control	3 646 W Electronic, tripping in the event of thermal overload of the motor
power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         type of the motor protection         Control circuit/ Control         type of voltage of the control supply voltage	3 646 W Electronic, tripping in the event of thermal overload of the motor
power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         type of the motor protection         Control circuit/ Control         type of voltage of the control supply voltage         control supply voltage at AC	3 646 W Electronic, tripping in the event of thermal overload of the motor
power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         type of the motor protection         Control circuit/ Control         type of voltage of the control supply voltage         control supply voltage at AC         • at 50 Hz	3 646 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V
power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         type of the motor protection         Control circuit/ Control         type of voltage of the control supply voltage         control supply voltage at AC         • at 50 Hz         • at 60 Hz	3 646 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V
power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         type of the motor protection         Control circuit/ Control         type of voltage of the control supply voltage         control supply voltage at AC         • at 50 Hz         • at 60 Hz         relative negative tolerance of the control supply voltage at AC at 50 Hz         relative positive tolerance of the control supply voltage at AC at 50 Hz	3 646 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V -15 %

AC at 60 Hz       10 %         relative positive tolerance of the control supply voltage at AC at 60 Hz       10 %         control supply voltage frequency       50 60 Hz         relative negative tolerance of the control supply voltage frequency       -10 %	
AC at 60 Hz     50 60 Hz       control supply voltage frequency     50 60 Hz       relative negative tolerance of the control supply voltage     -10 %	
relative negative tolerance of the control supply voltage -10 %	
relative positive tolerance of the control supply voltage 10 %	
control supply current in standby mode rated value 100 mA	
holding current in bypass operation rated value 150 mA	
inrush current by closing the bypass contacts maximum 0.87 A	
inrush current peak at application of control supply voltage 43 A 43 A	
duration of inrush current peak at application of control supply 1.6 ms voltage	
design of the overvoltage protection Varistor	
design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not par scope of supply	
Inputs/ Outputs	
number of digital inputs 4	
• with fail-safe 1	
• parameterizable 4	
• number of digital outputs 3	
Number of digital outputs with fail-safe	
number of digital outputs parameterizable	
number of digital outputs not parameterizable	
digital output version       2 normally-open contacts (NO) / 1 normally-closed contact (NC) / 1 change contact (CO)	eover
number of analog outputs 1	
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value 3 A	
• at DC-13 at 24 V rated value 1 A	
Response times	
OFF-delay time with safety-related request when switched off 100 ms via control inputs maximum	
Installation/ mounting/ dimensions	
mounting position Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)	
fastening method screw fixing	
height 393 mm	
width 210 mm	
depth 203 mm	
required spacing with side-by-side mounting	
• forwards 10 mm	
• backwards 0 mm	
• upwards 100 mm	
• downwards 75 mm	
• at the side 5 mm	
weight without packaging 10.2 kg	
Connections/ Terminals	
type of electrical connection	
for main current circuit     busbar connection	
for control circuit     spring-loaded terminals	
the second	
width of connection bar maximum 45 mm	
wire length for thermistor connection	
wire length for thermistor connection         • with conductor cross-section = 0.5 mm² maximum         50 m	
wire length for thermistor connection• with conductor cross-section = 0.5 mm² maximum• with conductor cross-section = 1.5 mm² maximum150 m	
wire length for thermistor connection50 m• with conductor cross-section = 0.5 mm² maximum50 m• with conductor cross-section = 1.5 mm² maximum150 m• with conductor cross-section = 2.5 mm² maximum250 m	
wire length for thermistor connection       50 m         • with conductor cross-section = 0.5 mm² maximum       50 m         • with conductor cross-section = 1.5 mm² maximum       150 m         • with conductor cross-section = 2.5 mm² maximum       250 m         type of connectable conductor cross-sections       250 m	
wire length for thermistor connection       50 m         • with conductor cross-section = 0.5 mm² maximum       50 m         • with conductor cross-section = 1.5 mm² maximum       150 m         • with conductor cross-section = 2.5 mm² maximum       250 m         type of connectable conductor cross-sections       250 m         • for DIN cable lug for main contacts stranded       2x (50 240 mm²)	
wire length for thermistor connection       50 m         • with conductor cross-section = 0.5 mm² maximum       50 m         • with conductor cross-section = 1.5 mm² maximum       150 m         • with conductor cross-section = 2.5 mm² maximum       250 m         type of connectable conductor cross-sections       250 m	

<ul> <li>for control circuit solid</li> </ul>	2x (0.25 1.5 mm²)
<ul> <li>for control circuit finely stranded with core end processing</li> </ul>	2x (0.25 1.5 mm²)
<ul> <li>for AWG cables for control circuit solid</li> </ul>	2x (24 16)
<ul> <li>for AWG cables for control circuit finely stranded with core end processing</li> </ul>	2x (24 16)
wire length	
between soft starter and motor maximum	800 m
at the digital inputs at DC maximum	1 000 m
tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	14 24 N·m
• for auxiliary and control contacts with screw-type	0.8 1.2 N·m
terminals	
tightening torque [lbf·in]	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	124 210 lbf·in
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m; Derating as of 1000 m, see catalog
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
<ul> <li>during operation according to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
<ul> <li>during storage according to IEC 60721</li> </ul>	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get
	inside the devices), 1M4
<ul> <li>during transport according to IEC 60721</li> </ul>	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
<ul> <li>PROFINET standard</li> </ul>	Yes
<ul> <li>PROFINET high-feature</li> </ul>	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
<ul> <li>of circuit breaker</li> </ul>	
<ul> <li>— usable for Standard Faults at 460/480 V according to UL</li> </ul>	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA
<ul> <li>— usable for High Faults at 460/480 V according to UL</li> </ul>	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA
<ul> <li>— usable for Standard Faults at 460/480 V at inside- delta circuit according to UL</li> </ul>	Siemens type: 3VA54, max. 600 A; Iq = 18 kA
<ul> <li>— usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> </ul>	Siemens type: 3VA54, max. 600 A; lq max = 65 kA
<ul> <li>— usable for Standard Faults at 575/600 V according to UL</li> </ul>	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA
<ul> <li>— usable for High Faults at 575/600 V at inside-delta circuit according to UL</li> </ul>	Siemens type: 3VA54, max. 600 A; lq max = 65 kA
<ul> <li>— usable for Standard Faults at 575/600 V at inside- delta circuit according to UL</li> </ul>	Siemens type: 3VA54, max. 600 A; Iq = 18 kA
of the fuse	
<ul> <li>— usable for Standard Faults up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 1000 A; lq = 18 kA
— usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 1000 A; lq = 100 kA
<ul> <li>— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 1000 A; lq = 18 kA
<ul> <li>— usable for High Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 1000 A; lq = 100 kA
operating power [hp] for 3-phase motors	
• at 200/208 V at 50 °C rated value	75 hp
<ul> <li>at 220/230 V at 50 °C rated value</li> </ul>	100 hp
<ul> <li>at 460/480 V at 50 °C rated value</li> </ul>	200 hp

• at 200/208 V at inside-delta circuit at 50 °C rated value	150 hp
• at 220/230 V at inside-delta circuit at 50 °C rated value	200 hp
• at 460/480 V at inside-delta circuit at 50 °C rated value	400 hp
contact rating of auxiliary contacts according to UL	R300-B300
Safety related data	
safety device type according to IEC 61508-2	Туре В
B10d value	147 000
Safety Integrity Level (SIL)	
<ul> <li>according to IEC 61508</li> </ul>	SIL1
SIL Claim Limit (subsystem) according to EN 62061	SIL 1
performance level (PL) according to EN ISO 13849-1	c
category according to EN ISO 13849-1	2
stop category according to EN 60204-1	0
Safe failure fraction (SFF)	60 %
average diagnostic coverage level (DCavg)	90 %
diagnostics test interval by internal test function maximum	1 000 s
PFHD with high demand rate according to EN 62061	1E-6 1/h
PFDavg with low demand rate according to IEC 61508	0.09
hardware fault tolerance according to IEC 61508	0
T1 value for proof test interval or service life according to IEC 61508	20 a
safe state	Open load circuit
protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
electromagnetic compatibility	acc. to IEC 60947-4-2
ATEX	
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
<ul> <li>according to ATEX directive 2014/34/EU</li> </ul>	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]
hardware fault tolerance according to IEC 61508 relating to ATEX	0
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008
PFHD with high demand rate according to EN 62061 relating to ATEX	5E-7 1/h
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 а
Certificates/ approvals	
General Product Approval	









**Confirmation** 

#### Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5545-2HF14

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5545-2HF14

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5545-2HF14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5545-2HF14&lang=en

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5545-2HF14/char


Characteristic: Installation altitude


http://ww.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5545-2HE14&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

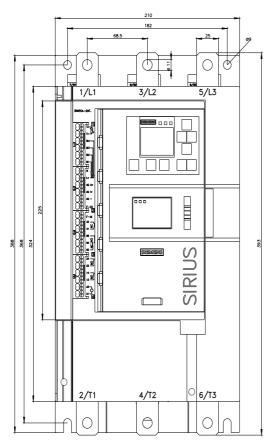

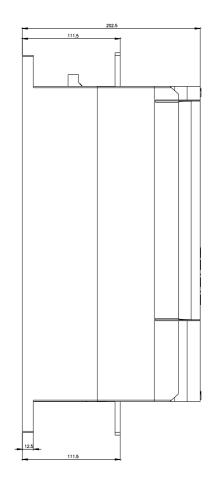

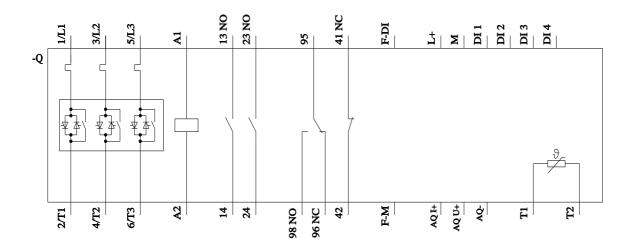

last modified:

5/1/2023 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RW55452HF14