SIEMENS

Data sheet



RONIS key-operated switch, 22 mm, round, plastic with metal front ring, lock number SB30, with 2 keys, 3 switch positions I-O-II, latching, actuating angle 2x45°, 10:30h/12h/13:30h, Key removal I+O+II, with holder, 1 NO, 1 NO, screw terminal, Z=20-unit packaging

| product brand name | SIRIUS ACT |
|--|--|
| product designation | Key-operated switches |
| design of the product | Complete unit |
| product type designation | 3SU1 |
| product line | Plastic with metal front ring, matt, 22 mm |
| manufacturer's article number | |
| of included key | 3SU1950-0FB80-0AA0 |
| of supplied contact module | 3SU1400-1AA10-1BA0, 3SU1400-1AA10-1BA0 |
| of supplied contact module at position 1 | 3SU1400-1AA10-1BA0 |
| of supplied contact module at position 2 | 3SU1400-1AA10-1BA0 |
| of the supplied holder | 3SU1550-0AA10-0AA0 |
| of the supplied actuator | 3SU1030-4BL11-0AA0 |
| Enclosure | |
| shape of the enclosure front | round |
| number of command points | 1 |
| Actuator | |
| principle of operation of the actuating element | latching, 2x45° (10:30 h/12 h/13:30 h) |
| product extension optional light source | No |
| color of the actuating element | silver |
| material of the actuating element | metal |
| shape of the actuating element | Key |
| outer diameter of the actuating element | 29.5 mm |
| number of contact modules | 2 |
| number of switching positions | 3 |
| switch position for key distraction | I+O+II |
| actuating angle | |
| • clockwise | 45° |
| anticlockwise | 45° |
| lock make | RONIS |
| key number | SB30 |
| Front ring | |
| product component front ring | Yes |
| design of the front ring | Standard |
| material of the front ring | Metal, matt |
| color of the front ring | sand gray |
| Holder | |
| material of the holder | Plastic |
| General technical data | |
| product function positive opening | No |
| product component light source | No |
| | |

| insulation voltage rated value | 500 V |
|--|--|
| degree of pollution | 3 |
| type of voltage of the operating voltage | AC/DC |
| <u>,, </u> | 6 kV |
| surge voltage resistance rated value | IP66, IP67, IP69(IP69K) |
| • | |
| • of the terminal | IP20 |
| degree of protection NEMA rating | 1, 2, 3, 3R, 4, 4X, 12, 13 |
| shock resistance | |
| • according to IEC 60068-2-27 | sinusoidal half-wave 15g / 11 ms |
| for railway applications according to EN 61373 | Category 1, Class B |
| vibration resistance | |
| according to IEC 60068-2-6 | 10 500 Hz: 5g |
| for railway applications according to EN 61373 | Category 1, Class B |
| operating frequency maximum | 1 800 1/h |
| mechanical service life (operating cycles) typical | 300 000 |
| electrical endurance (operating cycles) typical | 10 000 000 |
| thermal current | 10 A |
| reference code according to IEC 81346-2 | S |
| continuous current of the C characteristic MCB | 10 A; for a short-circuit current smaller than 400 A |
| continuous current of the quick DIAZED fuse link | 10 A |
| continuous current of the DIAZED fuse link gG | 10 A |
| Substance Prohibitance (Date) | 10/01/2014 |
| operating voltage | |
| rated value | 5 500 V |
| • at AC | |
| — at 50 Hz rated value | 5 500 V |
| — at 60 Hz rated value | 5 500 V |
| at DC rated value | 5 500 V |
| Power Electronics | |
| contact reliability | One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million |
| | (5 V, 1 mA) |
| All Yillary Circuit | |
| · | Cilver alley |
| design of the contact of auxiliary contacts | Silver alloy |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts | 0 |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts | |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals | 0 |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories | 0 |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections osolid with core end processing | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%, no |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%, no |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel) |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel) |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel) Front plate mounting 40 mm |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel) Front plate mounting 40 mm 30 mm |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel) Front plate mounting 40 mm 30 mm round |
| number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel) Front plate mounting 40 mm 30 mm round 22.3 mm |
| design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection | Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel) Front plate mounting 40 mm 30 mm round |

| installation width | 29.5 mm |
|--------------------|---------|
| installation depth | 49.7 mm |

Certificates/ approvals

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1130-4BL11-1NA0-Z X90

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1130-4BL11-1NA0-Z X90


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3SU1130-4BL11-1NA0-Z X90


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1130-4BL11-1NA0-Z X90&lang=en



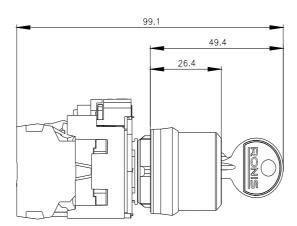



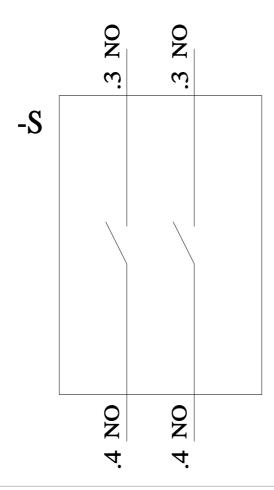

last modified: 1/27/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

A6X30142570