## **SIEMENS**

## **Data sheet**



Illuminated pushbutton, 22 mm, round, plastic with metal front ring, green, pushbutton, flat, momentary contact type, with holder, 1NO, LED module with integrated LED 110 V AC, screw terminal, with laser labeling, inscription or symbol Customer-specific selection with SIRIUS ACT configurator (CIN)

product brand name	SIRIUS ACT
product designation	Illuminated pushbuttons
design of the product	Complete unit
product type designation	3SU1
product line	Plastic with metal front ring, matt, 22 mm
manufacturer's article number	
<ul> <li>of supplied contact module at position 1</li> </ul>	3SU1400-1AA10-1BA0
<ul> <li>of supplied LED module</li> </ul>	3SU1401-1BC40-1AA0
<ul> <li>of the supplied holder</li> </ul>	3SU1550-0AA10-0AA0
of the supplied actuator	3SU1031-0AB40-0AA0
number of command points	1
Actuator	
design of the actuating element	Button, flat
principle of operation of the actuating element	momentary contact type
product extension optional light source	Yes
color of the actuating element	green
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	29.45 mm
marking of the actuating element	Any inscription, text or symbol, can only be ordered via SIRIUS ACT configurator/Configuration Identification Number (CIN)
number of contact modules	1
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	Metal, matt
color of the front ring	sand gray
Holder	
material of the holder	Plastic
Display	
number of LED modules	1
General technical data	
product function positive opening	No
product component light source	Yes
insulation voltage rated value	320 V
degree of pollution	3
type of voltage of the operating voltage	AC/DC
surge voltage resistance rated value	4 kV
protection class IP	IP66, IP67, IP69(IP69K)
of the terminal	IP20

0.00.00

degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B
vibration resistance	
<ul> <li>according to IEC 60068-2-6</li> </ul>	10 500 Hz: 5g
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B
operating frequency maximum	3 600 1/h
mechanical service life (operating cycles) typical	3 000 000
electrical endurance (operating cycles) typical	10 000 000
thermal current	10 A
reference code according to IEC 81346-2	S
continuous current of the C characteristic MCB	10 A; for a short-circuit current smaller than 400 A
continuous current of the quick DIAZED fuse link	10 A
continuous current of the DIAZED fuse link gG	10 A
Substance Prohibitance (Date)	10/01/2014
operating voltage	
• at AC	
— at 50 Hz rated value	5 500 V
— at 60 Hz rated value	5 500 V
at DC rated value	5 500 V
Power Electronics	
contact reliability	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million
·	(5 V, 1 mÅ)
Supply voltage	
type of voltage of the supply voltage of the light source	AC
supply voltage of the light source at AC	
• at 50 Hz rated value	110 V
at 60 Hz rated value	110 V
Control circuit/ Control	
inrush current of LED module maximum	3 A
Auxiliary circuit	
Auxiliary circuit design of the contact of auxiliary contacts	Silver alloy
-	Silver alloy 0
design of the contact of auxiliary contacts	
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts	0
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	0
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals	0 1
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection  • of modules and accessories	0 1 screw-type terminals
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection  • of modules and accessories type of connectable conductor cross-sections	0 1 screw-type terminals Screw-type terminal
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection  of modules and accessories  type of connectable conductor cross-sections osolid with core end processing	0 1 screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1 screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1 screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals  type of electrical connection	0 1 screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (0.1.5 1.5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1 screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1 screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 1 1.2 N·m
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1 screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 1 1.2 N·m
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1 screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 0x (1,0 1,5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1  screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1  screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1  screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1  screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1  screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m  LED green 900 1 800 mcd
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1  screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m  LED green 900 1 800 mcd
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1  screw-type terminals  Screw-type terminal  2x (0.5 0.75 mm²)  2x (1.0 1.5 mm²)  2x (0.5 1.5 mm²)  2x (1,0 1,5 mm²)  2x (1,0 1,5 mm²)  2x (18 14)  1 1.2 N·m  0.8 0.9 N·m  LED  green  900 1 800 mcd  -25 +70 °C  -40 +80 °C  3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no condensation in
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1  screw-type terminals  Screw-type terminal  2x (0.5 0.75 mm²)  2x (1.0 1.5 mm²)  2x (0.5 1.5 mm²)  2x (1,0 1,5 mm²)  2x (1,0 1,5 mm²)  2x (18 14)  1 1.2 N·m  0.8 0.9 N·m  LED  green  900 1 800 mcd  -25 +70 °C  -40 +80 °C  3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no condensation in
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1  screw-type terminals  Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m  LED  green 900 1 800 mcd  -25 +70 °C -40 +80 °C  3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	0 1  screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m  LED green 900 1 800 mcd  -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts  Connections/ Terminals  type of electrical connection	screw-type terminals Screw-type terminal  2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m  LED green 900 1 800 mcd  -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel)  front plate mounting Front plate mounting

shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	11 mm
installation width	29.5 mm
installation depth	49.7 mm
Certificates/ approvals	
Further information	

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

## Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1133-0AB40-1BA0-Z Y19

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1133-0AB40-1BA0-Z Y19

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1133-0AB40-1BA0-Z Y19

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SU1133-0AB40-1BA0-Z Y19&lang=en

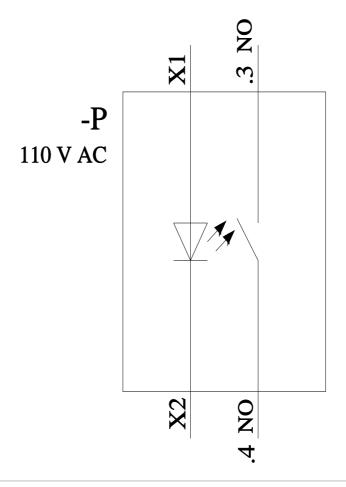

last modified: 1/26/2022 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

A6X30144091