3SU1152-0AB00-1BA0-Z Y19

Data sheet



Illuminated pushbutton, 22 mm, round, metal, shiny, amber, pushbutton, flat, momentary contact type, with holder, 1NO, LED module with integrated LED 24 V AC/DC, screw terminal, with laser labeling, inscription or symbol Customer-specific selection with SIRIUS ACT configurator (CIN)

product brand name	SIRIUS ACT	
product designation	Illuminated pushbuttons	
design of the product	Complete unit	
product type designation	3SU1	
product line	Metal, shiny, 22 mm	
manufacturer's article number		
 of supplied contact module at position 1 	3SU1400-1AA10-1BA0	
 of supplied LED module 	3SU1401-1BB00-1AA0	
 of the supplied holder 	3SU1550-0AA10-0AA0	
of the supplied actuator	3SU1051-0AB00-0AA0	
number of command points	1	
Actuator		
design of the actuating element	Button, flat	
principle of operation of the actuating element	momentary contact type	
product extension optional light source	Yes	
color of the actuating element	amber	
material of the actuating element	plastic	
shape of the actuating element	round	
outer diameter of the actuating element	29.45 mm	
marking of the actuating element	Any inscription, text or symbol, can only be ordered via SIRIUS ACT configurator/Configuration Identification Number (CIN)	
number of contact modules	1	
Front ring		
product component front ring	Yes	
design of the front ring	Standard	
material of the front ring	Metal, high gloss	
color of the front ring	silver	
Holder		
material of the holder	Plastic	
Display		
number of LED modules	1	
General technical data		
product function positive opening	No	
product component light source	Yes	
insulation voltage rated value	320 V	
degree of pollution	3	
type of voltage of the operating voltage	AC/DC	
surge voltage resistance rated value	4 kV	
protection class IP	IP66, IP67, IP69(IP69K)	
• of the terminal	IP20	

degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
vibration resistance	
according to IEC 60068-2-6	10 500 Hz: 5g
operating frequency maximum	3 600 1/h
mechanical service life (operating cycles) typical	3 000 000
electrical endurance (operating cycles) typical	10 000 000
thermal current	10 A
reference code according to IEC 81346-2	S
continuous current of the C characteristic MCB	10 A; for a short-circuit current smaller than 400 A
continuous current of the quick DIAZED fuse link	10 A
continuous current of the DIAZED fuse link gG	10 A
Substance Prohibitance (Date)	10/01/2014
operating voltage	
• at AC	
— at 50 Hz rated value	5 500 V
— at 60 Hz rated value	5 500 V
at DC rated value	5 500 V
Power Electronics	
contact reliability	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million
	(5 V, 1 mA)
Supply voltage	
type of voltage of the supply voltage of the light source	AC/DC
supply voltage of the light source at AC	
at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
supply voltage 1 of the light source at DC rated value	24 V
Control circuit/ Control	
inrush current of LED module maximum	2 A
Auxiliary circuit	
Auxiliary circuit design of the contact of auxiliary contacts	Silver allov
design of the contact of auxiliary contacts	Silver alloy
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts	0
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals	1
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories	1
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections	0 1 screw-type terminals Screw-type terminal
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing solid without core end processing	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing solid without core end processing finely stranded with core end processing	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing solid without core end processing finely stranded with core end processing finely stranded without core end processing	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing solid without core end processing finely stranded with core end processing finely stranded without core end processing for AWG cables	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 1
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED amber 450 1 120 mcd
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED amber 450 1 120 mcd
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing finely stranded with core end processing finely stranded without core end processing for AWG cables tightening torque of the screws in the bracket tightening torque with screw-type terminals Lamp type of light source color of the light source light intensity Ambient conditions ambient temperature during operation during storage	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED amber 450 1 120 mcd
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED amber 450 1 120 mcd -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no condensation in
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED amber 450 1 120 mcd
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED amber 450 1 120 mcd -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	0 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,2 mm²) 2x (1,0
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED amber 450 1 120 mcd -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel) front plate mounting Front plate mounting Front plate mounting 40 mm
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED amber 450 1 120 mcd -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel) front plate mounting Front plate mounting

mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	11 mm
installation width	29.5 mm
installation depth	49.7 mm
Certificates/ approvals	

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1152-0AB00-1BA0-Z Y19

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1152-0AB00-1BA0-Z Y19

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1152-0AB00-1BA0-Z Y19

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1152-0AB00-1BA0-Z Y19&lang=en

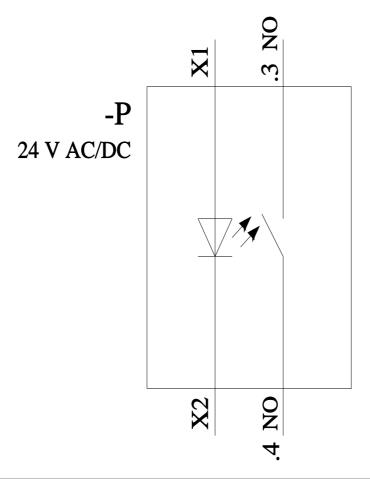

last modified: 1/26/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

A6X30144275