SIEMENS

Data sheet 3TC4817-0BK6



Contactor size 4, 2-pole DC-3 and 5, 75 A Auxiliary switch 22 (2 NO + 2 NC) Alternating current operation 120 V AC 60 Hz/110 V AC 50 Hz

product designation	Contactor
product type designation	3TC
General technical data	
size of contactor	4
product extension	
 function module for communication 	No
auxiliary switch	Yes
insulation voltage rated value	800 V
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	300 V
shock resistance at rectangular impulse	
• at AC	10g / 5 ms, 5g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
ambient temperature	
 during operation 	-25 +55 °C
during storage	-50 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles	2
number of poles for main current circuit	2
number of NO contacts for main contacts	2
number of NC contacts for main contacts	0
type of voltage	DC
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
— at 440 V rated value	75 A
— at 600 V rated value	75 A

— at 750 V rated value	75 A
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
— at 440 V rated value	75 A
— at 600 V rated value	75 A
— at 750 V rated value	75 A
operating power	
• at DC-1	
— at 110 V rated value	8.2 kW
— at 220 V rated value	16.5 kW
— at 440 V rated value	33 kW
— at 750 V rated value	56 kW
• at DC-3 at DC-5	
— at 110 V rated value	6.5 kW
— at 220 V rated value	13 kW
— at 440 V rated value	27 kW
— at 600 V rated value	38 kW
— at 750 V rated value	45 kW
operating frequency	
• at DC-1 maximum	1 000 1/h
• at DC-3 maximum	600 1/h
at DC-5 maximum	600 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
<u> </u>	
control supply voltage at AC	
	110 V
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value	110 V 120 V
control supply voltage at AC • at 50 Hz rated value	
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of	
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC	120 V
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz	120 V 0.8 1.1
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz	120 V 0.8 1.1 0.85 1.1
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC	0.8 1.1 0.85 1.1 300 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.26
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.26
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz arcing time Auxiliary circuit	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz instantaneous contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz instantaneous contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz intuitive power factor with the holding power of the coil • at 50 Hz • at 60 Hz intuitive power factor with the holding power of the coil • at 50 Hz • at 60 Hz intuitive power factor with the holding power of the coil • at 50 Hz • at 60 Hz intuitive power factor with the holding power of the coil • at 50 Hz • at 60 Hz intuitive power factor with the holding power of the coil • at 50 Hz • at 60 Hz intuitive power factor with the holding power of the coil • at 50 Hz • at 60 Hz intuitive power factor with the holding power of the coil	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 0.24 0.24 0.24 0.26 20 30 ms
control supply voltage at AC at 50 Hz rated value at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC at 50 Hz at 60 Hz apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz inductive power factor with closing power of the coil at 50 Hz at 60 Hz apparent holding power of magnet coil at AC at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz inductive power factor with the holding power of the coil at 50 Hz inductive power factor with the holding power of the coil intuitive power factor with the holding power of the coil intuitive power factor with the holding power of the coil intuitive power factor with the holding power of the coil intuitive power factor with the holding power of the coil intuitive power factor with the holding power of the coil at 50 Hz intuitive power factor with the holding power of the coil at 50 Hz intuitive power factor with the holding power of the coil at 50 Hz intuitive power factor with the holding power of the coil at 50 Hz intuitive power factor with the holding power of the coil at 50 Hz intuitive power factor with the holding power of the coil at 50 Hz intuitive power factor with the holding power of the coil at 50 Hz intuitive power factor with the holding power of the coil at 50 Hz intuitive power factor with closing power of the coil at 50 Hz intuitive power factor with closing power of the coil at 50 Hz at 60 Hz intuitive power factor with closing power of the coil at 50 Hz at 60 Hz intuitive power factor with closing power of the coil at 50 Hz at 60 Hz at	120 V 0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 0.24 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60	0.8 1.1 0.85 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.26 20 30 ms

1500 // / / /	054
• at 500 V rated value	2.5 A
operational current at DC-12	
at 24 V rated value	10 A
• at 48 V rated value	10 A
 at 60 V rated value 	10 A
at 110 V rated value	3.2 A
at 125 V rated value	2.5 A
at 220 V rated value	0.9 A
at 600 V rated value	0.22 A
operational current at DC-13	
at 24 V rated value	10 A
• at 48 V rated value	5 A
 at 60 V rated value 	5 A
• at 110 V rated value	1.14 A
 at 125 V rated value 	0.98 A
at 220 V rated value	0.48 A
 at 600 V rated value 	0.07 A
UL/CSA ratings	
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit	
with type of coordination 1 required	2 x 3NA31 (160 A) in series (750 V, 5 kA)
with type of assignment 2 required	2 x 3NA31 (130 A) in series (750 V, 5 kA)
for short-circuit protection of the auxiliary switch required	gG: 16 A (500 V, 1 kA)
Installation/ mounting/ dimensions	gg. 10 A (300 V, 1 kA)
	L/ 22 F° retation receible an vertical recepting aurices can be tilted forward
mounting position	+/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface
fastening method	screw fixing
 side-by-side mounting 	Yes
height	177.5 mm
width	100 mm
depth	156 mm
required spacing	
 with side-by-side mounting 	
— forwards	20 mm
— backwards	0 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
for grounded parts	
— forwards	55 mm
— backwards	0 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
for live parts	10 11111
for live parts forwards	55 mm
	o mm
— backwards	
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
Connections/ Terminals	
type of electrical connection	screw-type terminals
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
 for auxiliary contacts 	
— solid or stranded	2x (1 2.5 mm²)
 finely stranded with core end processing 	2x (0.75 1.5 mm²)

Safety related data	
product function mirror contact according to IEC 60947-4-1	Yes
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
town protoston on the new tools and to 120 occur	go. ca.c, io. rollica. contact non and none man coro.

Certificates/ approvals

General Product Approval

Functional Safety/Safety of Machinery





Confirmation





Type Examination Cer**tificate**

Functional
Safety/Safety of Ma-
chinery

Declaration of Conformity

Test Certificates

Type Examination Certificate





Miscellaneous

Special Test Certificate

Type Test Certificates/Test Report

other

Dangerous Good

Confirmation

Transport Information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TC4817-0BK6

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TC4817-0BK6

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3TC4817-0BK6


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TC4817-0BK6&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3TC4817-0BK6/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TC4817-0BK6&objecttype=14&gridview=view1

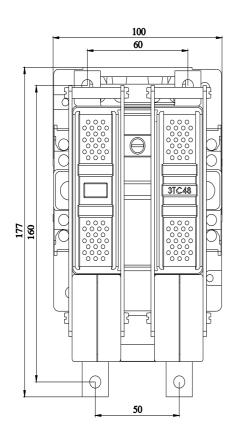

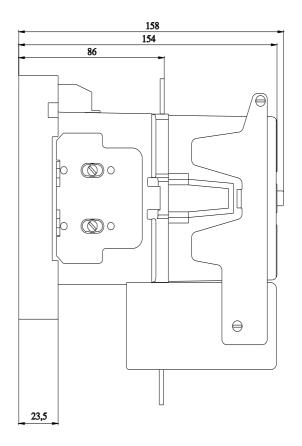

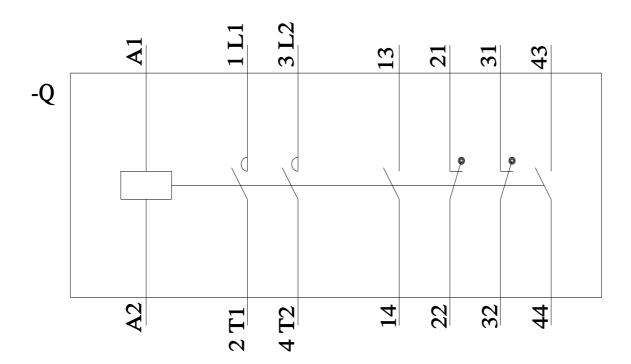

last modified: 2/13/2023 🖸



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3TC48170BK6