## SIEMENS

## Data sheet

## 3TC7814-1CM



Contactor, size 12, 2-pole, DC-3 and 5, 400 A Auxiliary switch 4 NO+4 NC 230/220 V AC 50 Hz AC operation AC operation

Support of				
product designation	Contactor			
product type designation	3TC			
General technical data				
size of contactor	12			
product extension				
<ul> <li>function module for communication</li> </ul>	No			
<ul> <li>auxiliary switch</li> </ul>	No			
insulation voltage rated value	1 500 V			
surge voltage resistance rated value	8 kV			
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	630 V			
mechanical service life (operating cycles)				
<ul> <li>of contactor typical</li> </ul>	30 000 000			
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	30 000 000			
reference code according to IEC 81346-2	Q			
Substance Prohibitance (Date)	03/01/2017			
Ambient conditions				
ambient temperature				
<ul> <li>during operation</li> </ul>	-25 +55 °C			
during storage	-50 +80 °C			
relative humidity minimum	10 %			
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %			
Main circuit				
number of poles	2			
number of poles for main current circuit	2			
number of NO contacts for main contacts	2			
number of NC contacts for main contacts	0			
type of voltage	DC			
operational current				
<ul> <li>at 1 current path at DC-1</li> </ul>				
— at 24 V rated value	500 A			
— at 110 V rated value	500 A			
— at 220 V rated value	500 A			
— at 440 V rated value	500 A			
— at 600 V rated value	500 A			
— at 750 V rated value	500 A			
<ul> <li>with 2 current paths in series at DC-1</li> </ul>				
— at 24 V rated value	500 A			
— at 110 V rated value	500 A			
— at 220 V rated value	500 A			

— at 440 V rated value	500 A
— at 600 V rated value	500 A
— at 750 V rated value	500 A
— at 1500 V rated value	500 A
<ul> <li>at 1 current path at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	400 A
— at 110 V rated value	400 A
— at 220 V rated value	400 A
— at 440 V rated value	400 A
— at 600 V rated value	400 A
— at 750 V rated value	400 A
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	400 A
— at 110 V rated value	400 A
— at 220 V rated value	400 A
— at 440 V rated value	400 A
— at 600 V rated value	400 A
— at 750 V rated value	400 A
— at 1500 V rated value	400 A
operating power	
• at DC-1	
- at 110 V rated value	55 kW
— at 220 V rated value	110 kW
— at 440 V rated value	220 kW
— at 750 V rated value	375 kW
— at 1500 V rated value	750 kW
• at DC-3 at DC-5	
— at 110 V rated value	35 kW
— at 220 V rated value	70 kW
— at 440 V rated value	140 kW
— at 600 V rated value	200 kW
— at 750 V rated value	250 kW
— at 1200 V rated value	400 kW
— at 1500 V rated value	500 kW
operating frequency	
• at DC-1 maximum	1 000 1/h
<ul> <li>at DC-3 maximum</li> </ul>	500 1/h
● at DC-5 maximum	500 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	220 V
operating range factor control supply voltage rated value of	
magnet coil at AC	
• at 50 Hz	0.8 1.2
apparent pick-up power of magnet coil at AC	160 VA
• at 50 Hz	160 VA
inductive power factor with closing power of the coil	0.95
• at 50 Hz	0.95
apparent holding power of magnet coil at AC	160 VA
● at 50 Hz	160 VA
inductive power factor with the holding power of the coil	0.95
● at 50 Hz	0.95
arcing time	40 70 ms
Auxiliary circuit	
number of NC contacts for auxiliary contacts	4
instantaneous contact	4
number of NO contacts for auxiliary contacts	4
instantaneous contact	4
number of CO contacts for auxiliary contacts	0
· · · · · · · · · · · · · · · · · · ·	44
identification number and letter for switching elements	44

operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	5.6 A
• at 400 V rated value	3.6 A
at 500 V rated value	2.5 A
operational current at DC-12	
at 24 V rated value	10 A
at 48 V rated value	10 A
• at 60 V rated value	10 A
at 100 V rated value	3.2 A
at 125 V rated value	2.5 A
at 220 V rated value	
	0.9 A 0.22 A
at 600 V rated value	0.22 A
operational current at DC-13	40.4
• at 24 V rated value	10 A
• at 48 V rated value	5 A
• at 60 V rated value	5 A
at 110 V rated value	1.14 A
at 125 V rated value	0.98 A
at 220 V rated value	0.48 A
at 600 V rated value	0.07 A
Short-circuit protection	
design of the fuse link	
<ul> <li>for short-circuit protection of the main circuit</li> </ul>	
<ul> <li>— with type of coordination 1 required</li> </ul>	2 x 3NE1330-5E (315 A) parallel (1500 V, 12 kA)
<ul> <li>— with type of assignment 2 required</li> </ul>	2 x 3NE1330-5E (315 A) parallel (1500 V, 12 kA)
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 16 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal mounting surface
fastening method	screw fixing
side-by-side mounting	Yes
height	375 mm
width	160 mm
depth	290 mm
required spacing	
• with side-by-side mounting	
— forwards	20 mm
— forwards	
— forwards — backwards	0 mm
— forwards — backwards — upwards	0 mm 25 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> </ul>	0 mm 25 mm 10 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul>	0 mm 25 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> </ul>	0 mm 25 mm 10 mm 10 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> </ul>	0 mm 25 mm 10 mm 10 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm 10 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 25 mm 10 mm 10 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>for wards</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 25 mm 10 mm 10 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>backwards</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 25 mm 10 mm 50 mm 0 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>backwards</li> <li>upwards</li> <li>upwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>upwards</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>downwards</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm 10 mm 50 mm 0 mm 25 mm 10 mm 10 mm 10 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>at the side</li> <li>at wards</li> <li>at the side</li> <li>at wards</li> <li>at the side</li> <li>at wards</li> <li>at the side</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>downwards</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm 10 mm 50 mm 0 mm 25 mm 10 mm 10 mm 10 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>at the side</li> <li>at wards</li> <li>at the side</li> <li>at wards</li> <li>at the side</li> <li>at wards</li> <li>at the side</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm 10 mm 50 mm 0 mm 25 mm 10 mm 10 mm 10 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>at the side</li> <li>at the side</li> <li>at the side</li> <li>at the side</li> <li>backwards</li> <li>backwards</li> <li>at the side</li> <li>at the side</li> <li>downwards</li> <li>at the side</li> <li>downwards</li> <li>at the side</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm 10 mm 50 mm 0 mm 25 mm 10 mm 10 mm 10 mm 10 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>for live parts</li> <li>forwards</li> <li>at the side</li> <li>downwards</li> <li>at the side</li> <li>downwards</li> <li>at the side</li> <li>downwards</li> <li>at the side</li> <li>backwards</li> <li>at the side</li> <li>backwards</li> <li>at the side</li> <li>backwards</li> <li>at the side</li> <li>downwards</li> <li>at the side</li> <li>downwards</li> <li>backwards</li> <li>at the side</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm 10 mm 10 mm 25 mm 10 mm 25 mm 0 mm
<ul> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> <li>for grounded parts</li> <li>for grounded parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>for wards</li> <li>at the side</li> <li>downwards</li> <li>for live parts</li> <li>at the side</li> <li>at the side</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> </ul>	0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm 10 mm 10 mm 50 mm 0 mm 25 mm 10 mm 10 mm 25 mm 10 mm 10 mm 25 mm 10 mm

		_						
— solid or stranded			2x (1	2.5 mm²)				
- finely stranded with core end processing		sing	2x (0.75 1.5 mm²)					
Safety related data								
product function mirror contact according to IEC 60947-4-1			Yes; 1 auxiliary NC contact each of the right and left current path must be connected in series					
protection class IP on the front according to IEC 60529			IP00					
Certificates/ approvals								
General Product Approval				Functional Safety/Safety of Machinery		Declaration of Con- formity		
<u>Confirmation</u>		EAC		Type Examination Cer- tificate	Type Examination Cer- tificate	UK CA		
Declaration of Con- formity	Test Certificates			other	Dangerous Good			
CE EG-Konf.	<u>Miscellaneous</u>	<u>Special Test Certi</u> <u>ate</u>	<u>fic-</u>	<u>Confirmation</u>	Transport Information			
Further information Siemens has decided to exit the Russian market (see here).								
	om/global/en/pressreleas		n-rus	sian-business				
Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).								
Information on the page	ckaging			,				
	siemens.com/cs/ww/en/							
https://www.siemens.co	nloadcenter (Catalogs, m/ic10	Brochures,)						

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TC7814-1CM

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TC7814-1CM

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3TC7814-1CM


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3TC7814-1CM&lang=en

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3TC7814-1CM/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TC7814-1CM&objecttype=14&gridview=view1

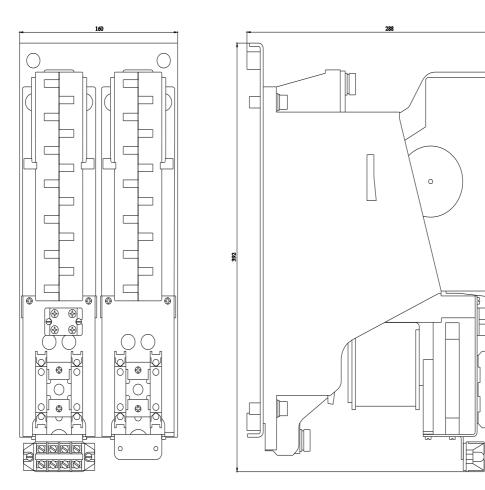

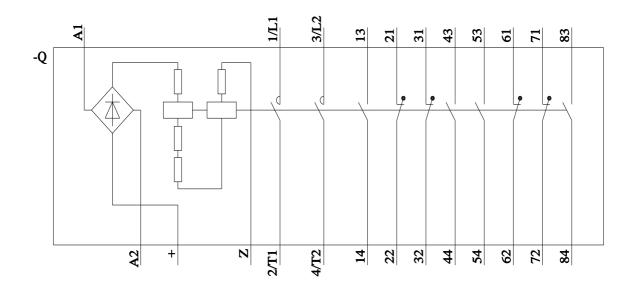

2/13/2023 🖸

8/13/2023

f

1

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3TC78141CM