# **SIEMENS**

Data sheet 3TK2810-1BA42



SIRIUS safety relay Safety-oriented Speed monitoring 24 V DC, 45 mm overall width Spring-type terminal EC instantaneous: 2 NO EC delayed: 0 SC: 2 electrical Auto-start/manual start Basic device Maximum achievable PL according to EN 13849-1: e Maximum achievable SIL according to IEC 61508: 3

product brand name	SIRIUS		
product designation	Speed monitor		
design of the product	standstill and speed monitoring		
General technical data			
protection class IP of the enclosure	IP20		
touch protection against electrical shock	finger-safe		
insulation voltage rated value	300 V		
ambient temperature			
during storage	-20 +70 °C		
during operation	0 60 °C		
air pressure according to SN 31205	90 106 kPa		
relative humidity during operation	10 95 %		
installation altitude at height above sea level maximum	2 000 m		
vibration resistance according to IEC 60068-2-6	10 55 Hz: 0.35 mm		
shock resistance	8g / 10 ms		
surge voltage resistance rated value	4 000 V		
EMC emitted interference	EN 60947-5-1		
installation environment regarding EMC	This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.		
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750	КТ		
reference code according to EN 61346-2	F		
number of sensor inputs			
• 2-channel	3		
1-channel or 2-channel	0		
design of the cascading	none		
type of the safety-related wiring of the inputs	single-channel or two-channel		
product feature cross-circuit-proof	Yes		
Safety Integrity Level (SIL)			
<ul> <li>according to IEC 61508</li> </ul>	3		
<ul> <li>according to IEC 62061</li> </ul>	3		
<ul> <li>for delayed release circuit according to IEC 61508</li> </ul>	SIL3		
SIL Claim Limit (subsystem) according to EN 62061	3		
performance level (PL)			
• according to ISO 13849-1	е		
• for delayed release circuit according to EN ISO 13849-1	е		
category according to EN ISO 13849-1	4		
hardware fault tolerance according to IEC 61508	1		
safety device type according to IEC 61508-2	Type B		
PFHD with high demand rate according to EN 62061	3.4E-9 1/h		

T1 value for proof test interval or service life according to IEC 61508	20 a		
number of outputs as contact-affected switching element			
as NC contact			
<ul> <li>for signaling function instantaneous contact</li> </ul>	0		
<ul> <li>for signaling function delayed switching</li> </ul>	0		
<ul> <li>— safety-related instantaneous contact</li> </ul>	0		
<ul> <li>— safety-related delayed switching</li> </ul>	0		
as NO contact			
<ul> <li>for signaling function instantaneous contact</li> </ul>	0		
for signaling function delayed switching	0		
safety-related instantaneous contact	1		
— safety-related delayed switching	1		
number of outputs as contact-less semiconductor			
switching element			
safety-related			
<ul> <li>delayed switching</li> </ul>	0		
— instantaneous contact	0		
for signaling function			
— delayed switching	1		
— instantaneous contact	1		
stop category according to EN 60204-1	0		
nputs			
design of input			
cascading input/functional switching	No		
feedback input	Yes		
• start input	Yes		
Encoder			
encoder signal evaluation	two signal tracks each with inverted signals		
type of signal level of the encoder	optionally TTL, HTL or sin/cos (Ua = 1Vss)		
	optionally FTE, FTTE of Sill/cos (Oa – TVSS)		
type of failure response of the encoder	high-resistance		
type of failure response of the encoder	high-resistance		
Proximity switch			
Proximity switch type of voltage of the supply voltage of proximity switches	DC		
roximity switch  type of voltage of the supply voltage of proximity switches supply voltage of proximity switches	DC 24 V; provided by the device		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum	DC 24 V; provided by the device 30 mA		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output	DC 24 V; provided by the device 30 mA optionally PNP or NPN		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis Dutputs switching capacity current • of semiconductor outputs	DC  24 V; provided by the device  30 mA  optionally PNP or NPN  10 V  75 µs  75 µs  1 Hz 2 kHz  +-2 %  6.25 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs — for signaling function at DC-13 at 24 V	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis Dutputs switching capacity current • of semiconductor outputs	DC  24 V; provided by the device  30 mA  optionally PNP or NPN  10 V  75 µs  75 µs  1 Hz 2 kHz  +-2 %  6.25 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs — for signaling function at DC-13 at 24 V	DC  24 V; provided by the device  30 mA  optionally PNP or NPN  10 V  75 µs  75 µs  1 Hz 2 kHz  +-2 %  6.25 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  • of semiconductor outputs  — for signaling function at DC-13 at 24 V  • of the NO contacts of the relay outputs at DC-13  — at 24 V  — at 115 V  • of the NO contacts of the relay outputs at AC-15	DC  24 V; provided by the device  30 mA  optionally PNP or NPN  10 V  75 µs  75 µs  1 Hz 2 kHz  +-2 %  6.25 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 24 V	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 24 V  at 230 V	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 24 V  at 230 V  of the NC contacts of the relay outputs at AC-15	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A  2 A 2 A 3 A 3 A		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 24 V  at 230 V  of the NC contacts of the relay outputs at AC-15  at 24 V  at 230 V	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A  2 A 2 A 3 A 3 A 3 A		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 24 V  at 230 V  of the NC contacts of the relay outputs at AC-15  at 24 V  at 215 V	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Dutputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 24 V  at 230 V  of the NC contacts of the relay outputs at AC-15  at 24 V  at 115 V  at 115 V  at 230 V  thermal current of the switching element with contacts	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A  2 A 2 A 3 A 3 A 3 A 3 A 3 A		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 24 V  at 230 V  of the NC contacts of the relay outputs at AC-15  at 24 V  at 115 V  at 230 V  thermal current of the switching element with contacts maximum	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A  2 A 2 A 3 A 3 A 3 A 3 A 3 A 3 A 3 A 3 A		
type of voltage of the supply voltage of proximity switches supply voltage of proximity switches current consumption of proximity switches maximum type of switching output input voltage for proximity switch minimum pulse duration of proximity switches minimum interpulse period of proximity switches minimum adjustment range of signal frequency of proximity switches measuring precision switching hysteresis  Outputs  switching capacity current  of semiconductor outputs  for signaling function at DC-13 at 24 V  of the NO contacts of the relay outputs at DC-13  at 24 V  at 115 V  of the NO contacts of the relay outputs at AC-15  at 24 V  at 230 V  of the NC contacts of the relay outputs at AC-15  at 24 V  at 230 V  thermal current of the switching element with contacts maximum electrical endurance (operating cycles) typical	DC 24 V; provided by the device 30 mA optionally PNP or NPN 10 V 75 µs 75 µs 1 Hz 2 kHz +-2 % 6.25 %  0.02 A  2 A 2 A 3 A 3 A 3 A 3 A 3 A 3 A 3 A 4 A 5 A		

Control circuit/ Control	DC				
type of voltage of the control supply voltage	DC				
control supply voltage 1	0414				
at DC rated value	24 V				
operating range factor control supply voltage rated value of magnet coil					
• at DC	0.9 1.1				
nstallation/ mounting/ dimensions					
mounting position	any				
fastening method	screw and snap-on mounting				
width	45 mm				
height	107.7 mm				
depth	124.3 mm				
Connections/ Terminals					
type of electrical connection	spring-loaded terminals				
type of connectable conductor cross-sections					
• solid	0.5 4 mm²				
finely stranded					
with core end processing	2 x (0.25 1.5 mm²)				
without core end processing	2x (0.25 1.5 mm²)				
type of connectable conductor cross-sections for AWG					
cables					
• solid	2x (24 16)				
stranded	2x (20 16)				
roduct Function					
product function					
light barrier monitoring	No				
<ul> <li>standstill monitoring</li> </ul>	Yes				
<ul> <li>protective door monitoring</li> </ul>	Yes				
automatic start	Yes				
<ul> <li>magnetically operated switch monitoring NC-NO</li> </ul>	No				
<ul> <li>rotation speed monitoring</li> </ul>	Yes				
<ul> <li>laser scanner monitoring</li> </ul>	No				
<ul> <li>monitored start-up</li> </ul>	Yes				
<ul> <li>light array monitoring</li> </ul>	No				
<ul> <li>magnetically operated switch monitoring NC-NC</li> </ul>	No				
EMERGENCY OFF function	Yes				
pressure-sensitive mat monitoring	No				
suitability for interaction press control	No				
suitability for use					
monitoring of floating sensors	Yes				
<ul> <li>monitoring of non-floating sensors</li> </ul>	No				
safety switch	Yes				
position switch monitoring	Yes				
EMERGENCY-OFF circuit monitoring	No				
valve monitoring	No				
tactile sensor monitoring	No				
magnetically operated switch monitoring	No				
safety-related circuits	Yes				
ertificates/ approvals					
certificate of suitability	EN ISO 13849, EN 62061, IEC	61508			
• TÜV (German technical inspectorate) certificate	Yes				
UL approval	Yes				
	No				
BG BIA approval		Declaration of Con-			











Special Test Certificate

other

Railway

Confirmation

Confirmation

#### Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

#### Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

### Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TK2810-1BA42

#### Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TK2810-1BA42


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3TK2810-1BA42

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3TK2810-1BA42&lang=en

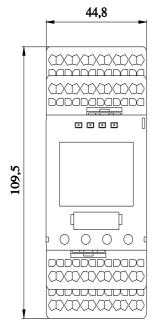

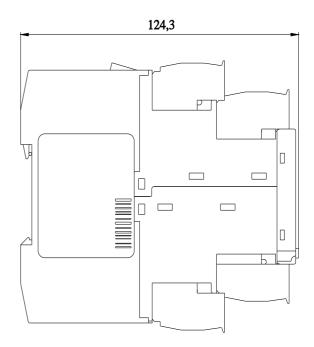

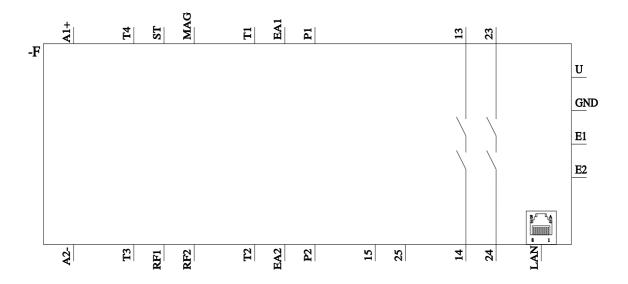

last modified: 4/11/2022 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3TK28101BA42