3VA1063-2ED32-0AA0

Data sheet



circuit breaker 3VA1 IEC frame 100 breaking capacity class B Icu=16kA @ 415V 3-pole, line protection TM210, FTFM, In=63A overload protection Ir=63A fixed short-circuit protection Ii=10 x In nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	TM210
protection function of the overcurrent release	LI
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at DC / rated value	500 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	17.3 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	5.77 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	9 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	6 300
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
 communication function 	No
 other measurement function 	No
Net Weight	942 g
Current	
operational current	
• at 40 °C	63 A
● at 45 °C	63 A
• at 50 °C	63 A
• at 55 °C	62 A
• at 60 °C	61 A
• at 65 °C	60 A
• at 70 °C	58 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	В
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	25 kA
• at 415 V	16 kA
• at 440 V	8 kA
• at 500 V	5 kA
● at 690 V	5 kA

operating short-circuit current breaking capacity (lcs) • at 240 V • at 415 V • at 440 V	
at 415 Vat 440 V	
• at 440 V	25 kA
	16 kA
	8 kA
• at 500 V	5 kA
• at 690 V	5 kA
short-circuit current making capacity (Icm)	
• at 240 V	52.5 kA
• at 415 V	32 kA
• at 440 V	13.6 kA
● at 500 V	7.5 kA
• at 690 V	7.5 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with 12t characteristic	
• minimum	63 A
maximum	63 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	1s
• maximum	1s
adjustable response value setting current (li) / for I-tripping	
minimum	630 A
• maximum	630 A
adjustable setting current (InN) / for N-tripping	030 A
minimum	0 A
• maximum	0 A
product function / grounding protection	No
Mechanical Design	NO.
product component	
undervoltage release	No
voltage rolease voltage trigger	No
trip indicator	No
• trip irraicator	5.12 in
height [in]	0.12 1
height [in]	130 mm
height	130 mm
height width [in]	3 in
height width [in] width	3 in 76.2 mm
height width [in] width depth [in]	3 in 76.2 mm 2.76 in
height width [in] width depth [in] depth	3 in 76.2 mm
height width [in] width depth [in] depth Connections	3 in 76.2 mm 2.76 in 70 mm
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	3 in 76.2 mm 2.76 in 70 mm
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	3 in 76.2 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
height	

• during storage / minimum

-40 °C 80 °C

during storage / maximum

Certificates

reference code / according to IEC 81346-2

Q

General Product Approval

EMC

Confirmation





Miscellaneous





Declaration of Conformity

Test Certificates

Marine / Shipping





Miscellaneous

Special Test Certificate

Type Test Certificates/Test Report



Marine / Shipping

other







CCS / China Classification Society

Confirmation

Miscellaneous

other

Environment

Miscellaneous

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1063-2ED32-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA1063-2ED32-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1063-2ED32-0AA0


CAx-Online-Generator

http://www.siemens.com/cax


Tender specifications

http://www.siemens.com/specifications

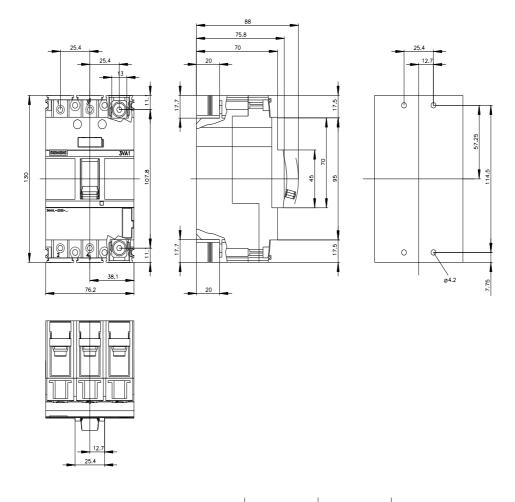

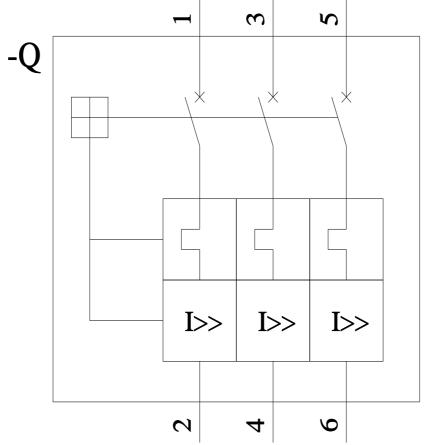

last modified: 8/10/2023 🖸

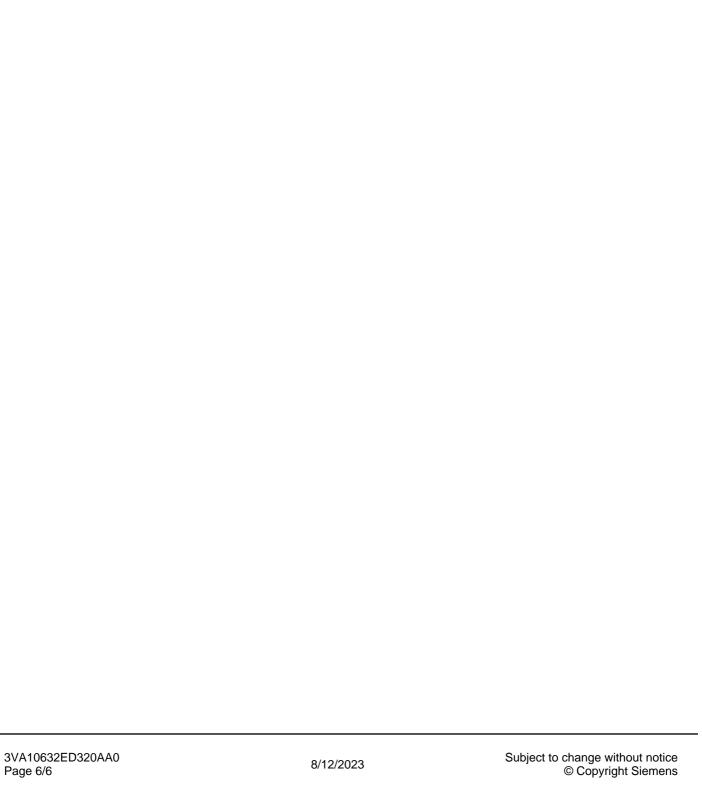

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3VA10632ED320AA0