SIEMENS

Data sheet

3VA1080-2ED36-0AA0



circuit breaker 3VA1 IEC frame 100 breaking capacity class B Icu=16kA @ 415V 3-pole, line protection TM210, FTFM, In=80A overload protection Ir=80A fixed short-circuit protection Ii=10 x In clamp connection


Model				
product brand name	SENTRON			
product designation	Molded case circuit breaker			
design of the product	Line protection			
design of the overcurrent release	TM210			
protection function of the overcurrent release	LI			
number of poles	3			
General technical data				
insulation voltage / rated value	800 V			
operating voltage / at DC / rated value	500 V			
operating voltage / at AC / rated value	690 V			
power loss [W] / maximum	19.2 W			
mechanical service life (operating cycles) / typical	20 000			
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	9 000			
electrical endurance (operating cycles) / at AC-1 / at 690 V	6 300			
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No			
ground-fault monitoring version	Without			
product function				
communication function	No			
other measurement function	No			
Net Weight	1.024 kg			
Current				
operational current				
• at 40 °C	80 A			
● at 45 °C	80 A			
• at 50 °C	80 A			
• at 55 °C	78 A			
• at 60 °C	77 A			
• at 65 °C	75 A			
• at 70 °C	74 A			
Switching capacity according to IEC 60947				
switching capacity class of the circuit breaker	В			
maximum short-circuit current breaking capacity (Icu)				
• at 240 V	25 kA			
• at 415 V	16 kA			
• at 440 V	8 kA			
• at 500 V	5 kA			
• at 690 V	5 kA			
operating short-circuit current breaking capacity (lcs)				


• at 240 V	25 kA
• at 415 V	16 kA
• at 440 V	8 kA
● at 500 V	5 kA
• at 690 V	5 kA
short-circuit current making capacity (Icm)	
• at 240 V	52.5 kA
• at 415 V	32 kA
• at 440 V	13.6 kA
• at 500 V	7.5 kA
• at 690 V	7.5 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic	
• minimum	80 A
• maximum	80 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
● minimum	1 s
● maximum	1 s
adjustable response value setting current (li) / for I-tripping	
• minimum	800 A
• maximum	800 A
adjustable setting current (InN) / for N-tripping	
• minimum	0 A
• maximum	0 A
product function / grounding protection	No
Mechanical Design	
product component	
product component undervoltage release 	No
	No No
undervoltage release	
undervoltage releasevoltage trigger	No
undervoltage releasevoltage triggertrip indicator	No No
undervoltage release voltage trigger trip indicator height [in]	No No 5.12 in
undervoltage release voltage trigger trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²)
• undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²) 76.2 mm
• undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in]	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²)
undervoltage release voltage trigger trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in]	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²) 76.2 mm
• undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in]	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²) 76.2 mm 2.76 in
undervoltage release voltage trigger trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in]	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²) 76.2 mm 2.76 in
undervoltage release voltage trigger trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²) 76.2 mm 2.76 in 70 mm
undervoltage release voltage trigger trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal
• undervoltage release • voltage trigger • trip indicator height [in] height [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No S.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides
• undervoltage release • voltage trigger • trip indicator height [in] height [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin
• undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver
undervoltage release voltage trigger trip indicator height [in] height [in] height [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin
• undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin
• undervoltage release • voltage trigger • trip indicator height [in] height [in] height [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin 0
undervoltage release voltage trigger trip indicator height [in] height [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin 0
undervoltage release voltage trigger trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin 0 No
undervoltage release voltage trigger trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin 0 No
 undervoltage release voltage trigger trip indicator height [in] height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature 	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin 0 No
 undervoltage release voltage trigger trip indicator height [in] height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature during operation / minimum 	No S.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin 0 IP40 -25 °C
 undervoltage release voltage trigger trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature during operation / maximum 	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin 0 IP40 -25 °C 70 °C


ertificates					
reference code / accor	rding to IEC 81346-2	Q			
General Product App	proval				EMC
	<u>Confirmation</u>		Miscellaneous	EHC	RCM
Declaration of Confo	ormity	Test Certificates			Marine / Shipping
CE EG-Konf.	UK CA	<u>Special Test Certific-</u> <u>ate</u>	Type Test Certific- ates/Test Report	<u>Miscellaneous</u>	ABS
Marine / Shipping				other	
BUREAU VERITAS		RMRS	<u>CCS / China Classific-</u> ation Society	<u>Confirmation</u>	<u>Miscellaneous</u>
other	Environment				
<u>Miscellaneous</u>	Environmental Con- firmations				
rther information					
https://press.siemens. Siemens is working of Please contact your lo EAC relevant market (Information on the po https://support.industro Information- and Dov	(other than the sanctioned ackaging y.siemens.com/cs/ww/en/v wnloadcenter (Catalogs, I	e/siemens-wind-down-rus rent EAC certificates. status of validity of the EA EAEU member states Ru iew/109813875	C certification if you intend	to import or offer to sup	ply these products to an
http://www.siemens.co Industry Mall (Online	om/lowvoltage/catalogs ordering system)				
Service&Support (Ma	emens.com/mall/en/en/Cat anuals, Certificates, Char	acteristics, FAQs,)			
mage database (pro	y.siemens.com/cs/ww/en/p duct images, 2D dimensi n.siemens.com/bilddb/cax	on drawings, 3D models	s, device circuit diagrams	,)	
CAx-Online-Generate	or				

Tender specifications

http://www.siemens.com/specifications

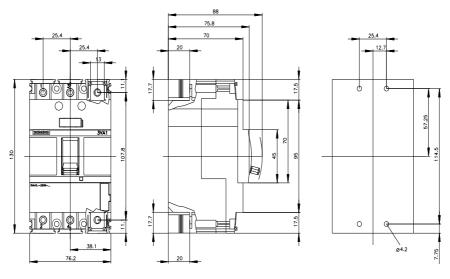



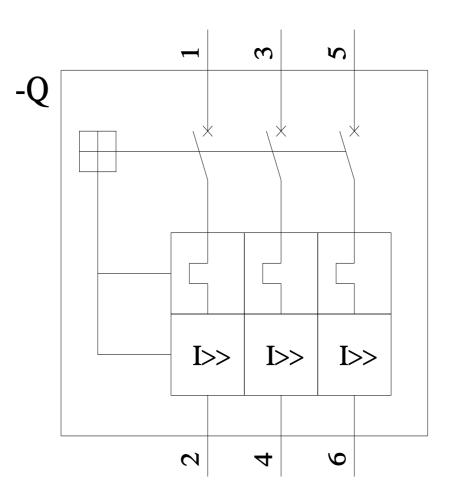

8/10/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3VA10802ED360AA0