SIEMENS

Data sheet

3VA1110-3EE36-0AA0




circuit breaker 3VA1 IEC frame 160 breaking capacity class N Icu=25kA @ 415V 3-pole, line protection TM220, ATFM, In=100A overload protection Ir=70A...100A short-circuit protection Ii=10 x In clamp connection


Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	TM220
protection function of the overcurrent release	LI
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at DC / rated value	500 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	25 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	9 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	6 300
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
 communication function 	No
 other measurement function 	No
Net Weight	999 g
Current	
operational current	
• at 40 °C	100 A
• at 45 °C	100 A
• at 50 °C	100 A
● at 55 °C	98 A
• at 60 °C	96 A
• at 65 °C	94 A
• at 70 °C	91 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	Ν
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	36 kA
• at 415 V	25 kA
• at 440 V	16 kA
• at 500 V	7 kA
• at 690 V	7 kA
operating short-circuit current breaking capacity (lcs)	


• at 240 V	36 kA
• at 415 V	25 kA
• at 440 V	16 kA
● at 500 V	5 kA
• at 690 V	5 kA
short-circuit current making capacity (Icm)	
• at 240 V	75.6 kA
• at 415 V	52.5 kA
• at 440 V	32 kA
• at 500 V	11.9 kA
• at 690 V	11.9 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic	
• minimum	70 A
• maximum	100 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	1 s
• maximum	1 s
adjustable response value setting current (li) / for I-tripping	
• minimum	1 000 A
• maximum	1 000 A
adjustable setting current (InN) / for N-tripping	
• minimum	0 A
• maximum	0 A
product function / grounding protection	No
Mechanical Design	
mechanical Design	
product component	
	No
product component	No No
product component undervoltage release 	
product component undervoltage release voltage trigger 	No
product component • undervoltage release • voltage trigger • trip indicator height [in]	No No
product component • undervoltage release • voltage trigger • trip indicator	No No 5.12 in
product component undervoltage release voltage trigger trip indicator height [in] height 	No No 5.12 in 130 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round	No No 5.12 in 130 mm 3 in
product component	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²)
product component	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²) 76.2 mm
product component	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²) 76.2 mm 2.76 in
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²) 76.2 mm 2.76 in 70 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm ²) 76.2 mm 2.76 in 70 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	No No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin 0
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin 0
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin Ves
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin Ves IP40
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connections / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature • during operation / minimum	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin Yes IP40 -25 °C
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of electrical connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature • during operation / minimum • during operation / minimum	No S.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin Yes IP40 -25 °C 70 °C
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] type of connectable conductor cross-sections / of the round conductor terminal / stranded width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature • during operation / minimum	No 5.12 in 130 mm 3 in 1 x (1,5 - 70 mm²) 76.2 mm 2.76 in 70 mm Front terminal box terminal on both sides Silver Tin Yes IP40 -25 °C

ertificates					
reference code / accord	ding to IEC 81346-2	Q			
General Product Approval					EMC
	<u>Confirmation</u>		<u>Miscellaneous</u>	EHC	RCM
Declaration of Confo	rmity	Test Certificates			Marine / Shipping
UK CA	CE EG-Konf.	<u>Miscellaneous</u>	Type Test Certific- ates/Test Report	<u>Special Test Certific-</u> <u>ate</u>	ABS
Marine / Shipping				other	
BUREAU VERITAS		RMRS	<u>CCS / China Classific-</u> ation Society	<u>Confirmation</u>	<u>Miscellaneous</u>
other	Environment				
<u>Miscellaneous</u>	Environmental Con- firmations				
urther information					
Siemens has decided https://press.siemens.c Siemens is working o Please contact your loc	to exit the Russian mar com/global/en/pressreleas in the renewal of the cur cal Siemens office on the other than the sanctioned	e/siemens-wind-down-ru rent EAC certificates. status of validity of the E	AC certification if you intend	to import or offer to suppl	y these products to an
nformation on the pa		iew/109813875			
nttp://www.siemens.com ndustry Mall (Online	m/lowvoltage/catalogs ordering system)				
<u>https://mall.industry.sie</u> Service&Support (Ma	mens.com/mall/en/en/Cat nuals, Certificates, Chai	racteristics, FAQs,)			
	.siemens.com/cs/ww/en/p		<u>)</u> Is, device circuit diagrams	· · ·	
	siemens.com/bilddb/cax			·, ···)	

Tender specifications http://www.siemens.com/specifications

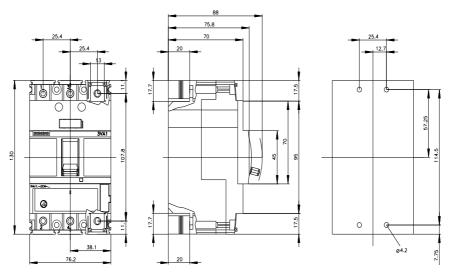



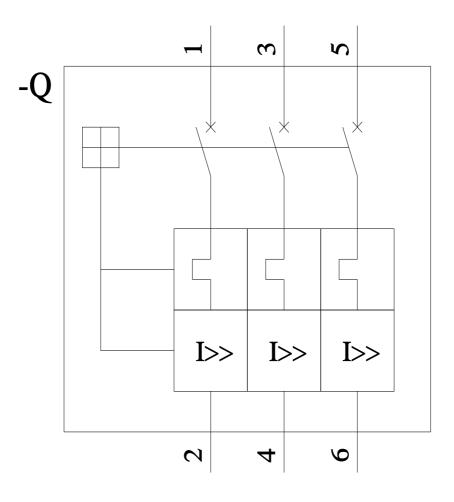

8/10/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3VA11103EE360AA0