SIEMENS

Data sheet

3VA1120-3EE42-0AA0



circuit breaker 3VA1 IEC frame 160 breaking capacity class N lcu=25kA @ 415V 4-pole, line protection TM220, ATFM, In=20A overload protection Ir=14A...20A short-circuit protection Ii=16 x In N conductor unprotected nut keeper kit

Model			
product brand name	SENTRON		
product designation	Molded case circuit breaker		
design of the product	Line protection		
design of the overcurrent release	TM220		
protection function of the overcurrent release	LI		
number of poles	4		
General technical data			
insulation voltage / rated value	800 V		
operating voltage / at DC / rated value	600 V		
operating voltage / at AC / rated value	690 V		
power loss [W] / maximum	12 W		
mechanical service life (operating cycles) / typical	20 000		
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	9 000		
electrical endurance (operating cycles) / at AC-1 / at 690 V	6 300		
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No		
ground-fault monitoring version	Without		
product function			
 communication function 	No		
 other measurement function 	No		
Net Weight	1.222 kg		
Current			
operational current			
● at 40 °C	20 A		
● at 45 °C	20 A		
● at 50 °C	20 A		
● at 55 °C	20 A		
● at 60 °C	19 A		
● at 65 °C	19 A		
• at 70 °C	19 A		
Switching capacity according to IEC 60947			
switching capacity class of the circuit breaker	Ν		
maximum short-circuit current breaking capacity (lcu)			
• at 240 V	36 kA		
• at 415 V	25 kA		
• at 440 V	16 kA		
• at 500 V	7 kA		
• at 690 V	7 kA		
operating short-circuit current breaking capacity (lcs)			

• at 240 V 36 kA • at 415 V 25 kA • at 440 V 16 kA • at 500 V 5 kA • at 690 V 5 kA short-circuit current making capacity (Icm) 5 kA • at 240 V 75.6 kA • at 440 V 32 kA • at 440 V 32 kA • at 450 V 52.5 kA • at 440 V 32 kA • at 690 V 11.9 kA • at 690 V 14 A<	
• at 440 V16 kA• at 500 V5 kA• at 690 V5 kAshort-circuit current making capacity (Icm)5 kA• at 240 V75.6 kA• at 240 V32 kA• at 415 V32 kA• at 440 V31 kA• at 440 V11.9 kA• at 690 V11.9 kA• at 690 V50 kA• at 690 V11.9 kA	
• at 500 V5 kA• at 690 V5 kAshort-circuit current making capacity (Icm)5 kA• at 240 V75.6 kA• at 415 V52.5 kA• at 440 V32 kA• at 500 V11.9 kA• at 690 V11.9 kA• at 690 VFor switching power values in DC networks, see the 3VA molded case cirr breaker device manual; link to be found under Service & Support in the lat chapterAdjustable parametersNoproduct feature / for L-tripping / can be switched on/off l2t characteristicNo• minimum14 A• maximum20 A	
• at 690 V5 kAshort-circuit current making capacity (Icm)75.6 kA• at 240 V75.6 kA• at 415 V52.5 kA• at 440 V32 kA• at 500 V11.9 kA• at 690 V11.9 kA• at 690 V11.9 kAdesign of short-circuit protectionFor switching power values in DC networks, see the 3VA molded case circ breaker device manual; link to be found under Service & Support in the lat chapterAdjustable parametersNoproduct feature / for L-tripping / can be switched on/off l2t characteristicNo• minimum14 A• maximum20 A	
short-circuit current making capacity (Icm) 75.6 kA • at 240 V 75.6 kA • at 415 V 52.5 kA • at 440 V 32 kA • at 500 V 11.9 kA • at 690 V 11.9 kA design of short-circuit protection For switching power values in DC networks, see the 3VA molded case circult protection Adjustable parameters product feature / for L-tripping / can be switched on/off No adjustable response value setting current (Ir) / of the L-trip / with 12t characteristic • minimum 14 A • maximum 20 A	
 at 240 V at 415 V at 415 V at 440 V at 500 V at 690 V 4 690 V 11.9 kA For switching power values in DC networks, see the 3VA molded case cimbreaker device manual; link to be found under Service & Support in the latchapter Adjustable parameters product feature / for L-tripping / can be switched on/off adjustable response value setting current (lr) / of the L-trip / with l2t characteristic minimum maximum 20 A 	
 at 415 V at 440 V at 500 V at 690 V design of short-circuit protection For switching power values in DC networks, see the 3VA molded case cirrb breaker device manual; link to be found under Service & Support in the lat chapter Adjustable parameters product feature / for L-tripping / can be switched on/off adjustable response value setting current (Ir) / of the L-trip / with l2t characteristic minimum maximum 20 A 	
 at 440 V at 500 V at 690 V for switching power values in DC networks, see the 3VA molded case cimbreaker device manual; link to be found under Service & Support in the last chapter Adjustable parameters product feature / for L-tripping / can be switched on/off adjustable response value setting current (lr) / of the L-trip / with l2t characteristic minimum maximum 20 A 	
• at 500 V 11.9 kA • at 690 V 11.9 kA design of short-circuit protection For switching power values in DC networks, see the 3VA molded case circle breaker device manual; link to be found under Service & Support in the last chapter Adjustable parameters product feature / for L-tripping / can be switched on/off No adjustable response value setting current (lr) / of the L-trip / with l2t characteristic 14 A • minimum 120 A	
• at 690 V 11.9 kA design of short-circuit protection For switching power values in DC networks, see the 3VA molded case circ breaker device manual; link to be found under Service & Support in the lat chapter Adjustable parameters product feature / for L-tripping / can be switched on/off adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic No • minimum 14 A 20 A	
design of short-circuit protection For switching power values in DC networks, see the 3VA molded case circle breaker device manual; link to be found under Service & Support in the last chapter Adjustable parameters product feature / for L-tripping / can be switched on/off No adjustable response value setting current (Ir) / of the L-trip / with l2t characteristic 14 A • minimum 20 A	
Adjustable parameters No product feature / for L-tripping / can be switched on/off No adjustable response value setting current (Ir) / of the L-trip / with l2t characteristic 14 A • minimum 20 A	
product feature / for L-tripping / can be switched on/off No adjustable response value setting current (Ir) / of the L-trip / with l2t characteristic minimum maximum 20 A 	
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic • minimum • maximum 20 A	
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic • minimum • maximum 20 A	
I2t characteristic • minimum • maximum 20 A	
• maximum 20 A	
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum 1 s	
• maximum 1 s	
adjustable response value setting current (li) / for I-tripping	
• minimum 320 A	
• maximum 320 A	
adjustable setting current (InN) / for N-tripping	
• minimum 0 A	
• maximum 0 A	
design of the N-conductor protection without	
product function / grounding protection No	
Mechanical Design	
product component	
undervoltage release No	
voltage trigger No	
• trip indicator No	
height [in] 5.12 in	
height 130 mm	
width [in] 4 in	
width 101.6 mm	
depth [in] 2.76 in	
depth 70 mm	
Connections	
arrangement of electrical connectors / for main current circuit Front terminal	
type of electrical connection / for main current circuit nut keeper kit on both ends	
type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / minimum 12 x 0 5	
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver	
design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	
Auxiliary circuit	
number of CO contacts / for auxiliary contacts 0	
Accessories	
product extension / optional / motor drive Yes	
Environmental conditions	
protection class IP / on the front IP40	
•	
ambient temperature	
•	

• during storage /		-40				
during storage /	maximum	80 °	C			
Certificates	diag to IEC 91246 2	Q				
reference code / accord General Product App	*	Q			EMC	
General Froduct App	loval				LING	
	<u>Confirmation</u>	VDE	<u>Miscellaneous</u>	EHC	RCM	
Declaration of Confo	rmity	Test Certificates			Marine / Shipping	
UK CA	CE EG-Konf.	<u>Type Test Certific-</u> ates/Test Report	<u>Miscellaneous</u>	<u>Special Test Certific-</u> <u>ate</u>	ABS	
Marine / Shipping				other		
BUREAU VERITAS		RMRS	<u>CCS / China Classific-</u> <u>ation Society</u>	<u>Confirmation</u>	<u>Miscellaneous</u>	
other	Environment					
<u>Miscellaneous</u>	Environmental Con- firmations					
Further information						
	to exit the Russian mark		- teo busta -			
Siemens is working o Please contact your loc EAC relevant market (c	https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).					
	Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875					
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system)						

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1120-3EE42-0AA0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3VA1120-3EE42-0AA0 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1120-3EE42-0AA0


CAx-Online-Generator

http://www.siemens.com/cax


Tender specifications http://www.siemens.com/specifications

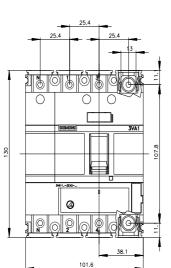

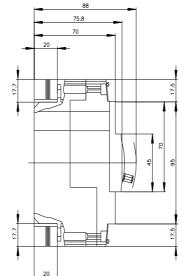

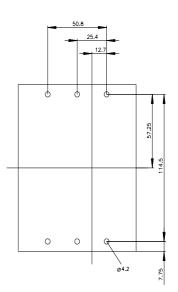

 25.4

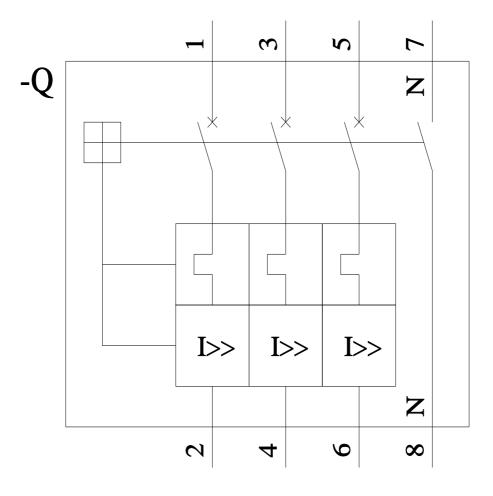

8/10/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3VA11203EE420AA0