SIEMENS

Data sheet


3VA1150-3EF42-0AA0



circuit breaker 3VA1 IEC frame 160 breaking capacity class N Icu=25kA @ 415V 4-pole, line protection TM240, ATAM, In=50A overload protection Ir=35A...50A short-circuit protection Ii=5...10 x In N conductor unprotected nut keeper kit

ENTRON lolded case circuit breaker ne protection M240 1 200 V 200 V 200 V 200 V 4.6 W 20 000 000 300 0 0 1 200 0 200 0 2
ne protection M240 00 V 00 V 00 V 90 V 4.6 W 0 000 000 300 00
M240 M240 00 V 00 V 00 V 4.6 W 0 000 000 300 0
00 V 00 V 90 V 4.6 W 0 000 000 300 0
00 V 00 V 90 V 4.6 W 0 000 000 300 0
00 V 90 V 4.6 W 0 000 000 300 0
00 V 90 V 4.6 W 0 000 000 300 0
00 V 90 V 4.6 W 0 000 000 300 0
90 V 4.6 W 0 000 000 300 0
4.6 W 0 000 000 300 0
0 000 000 300 0
000 300 o
300 o
0
/ithout
0
0
181 kg
A C
A C
A C
9 A
3 A
6 A
5 A
3 kA
5 kA
3 kA
kA
kA
0 0 9 8 6 5 5 6 7 8 6 7 8

	a at 240 V	26 44
• • • • • • • • • • • • • • • • • • •		
• a1 800 V 5 kÅ shurt circuit current making capacity (Icm) 7.6 kÅ • a1 430 V 7.6 kÅ • a1 430 V 7.6 kÅ • at 440 V 32 kÅ • at 450 V 32 kÅ • at 450 V 19 kÅ • at 500 V 10 kÅ • at 500 K 10 kÅ • at 500 K <t< td=""><td></td><td></td></t<>		
• at 800 V 5 kÅ short-error tunning capacity (tem) 75.8 kÅ • at 440 V 25.8 kÅ • at 460 V 25.8 kÅ • at 460 V 19.8 kÅ • at 460 V 19.8 kÅ • at 660 V 11.9 kÅ design of short-forcut protection For suticiting power values in DC networks, see the 3VA moded case circuit breaker doise manual. link to be found under Service & Support in the last Adjustable spannetors No adjustable response value delay time (tr) / for L-tripping / with 127 No - maximum 50.4 - maximum 15 - maximum 250.4 - maximum 50.0 adjustable response value delay time (tr) / for L-tripping 1 - maximum 50.0 adjustable response value delay time (tr) / for L-tripping 1 - maximum 0.0 - maximum		
shot-fraud nummt making capacity (Icm) 756 kÅ • at 340 V 756 kÅ • at 415 V 32.kÅ • at 600 V 11.9 kÅ • at 600 V 11.9 kÅ • delagin of hot-drout protection For suitching power values in DC networks, see the 3VA model case and curlt breaker device manual: link to be found under Service & Support in the lisst Adjustable prepone value setting current (Ir) / of the L-trip / value 12 characterise No adjustable prepone value setting current (Ir) / of the L-trip / value 12 characterise No adjustable respone value setting current (Ir) / for L-tripping / value 12 characterise No adjustable respone value setting current (Ir) / for L-tripping / value 12 characterise No adjustable setting current (Ir) / for L-tripping / value 12 characterise So A adjustable setting current (Ir) / for L-tripping / value 12 characterise So A adjustable setting current (Ir) / for L-tripping / value 12 characterise No adjustable setting current (Ir) / for L-tripping / value 12 characterise No adjustable setting current (Ir) / for L-tripping / value 12 characterise No adjustable setting current (Ir) / for L-tripping / value 12 characterise No adjustable setting current (Ir) / for L-tripping / value 12 characterise No		
• at 240 v 75.6 kÅ • at 440 v 52.6 kÅ • at 600 v 1.9 kÅ • at 600 v 1.9 kÅ design of short-circul protection For switching power values in DC metworks, see the 3VA motided case circult breaker doice manual, link to be found under Service & Support in the test chapter Adjustable parameters		5 KA
+ 141 5 V 52 5 Ma • • at 600 V 11 9 Ma • • at 600 V 11 9 Ma • • d 600 V For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the tast characteristic Adjustable response value setting current (i/) / of the L-trip / with 12 therateristic Na adjustable response value setting current (i/) / of the L-trip / with 12 therateristic Na adjustable response value setting current (i/) / for L-tripping / with 12 therateristic Na • maximum 50 A • maximum 1 s • maximum 250 A • maximum 00 A • maximum 0 A • maximum		
e. et 440 V 32 kA e. at 500 V 11.9 kA Gesign of short-circuit protection For switching power values in DC networks, see the SVA molded case circuit betwee A Support in the last obspice Adjustable parameters		
• et 500 V 11.9 kA design of shirt-drout protection For switching power values in DC networks, see the 3VA molded case circuit breaker. dutabable parameters product feature. / for L-tripping / can be switched on/off No adjustable response value setting ourrent (I/) / of the L-trip / with I2 characteristic No adjustable response value setting ourrent (I/) / of the L-trip / with I2 characteristic No adjustable response value setting ourrent (I/) / for L-tripping / with I2 characteristic No adjustable response value delay time (th) / for L-tripping / with I2 characteristic So A adjustable response value setting current (III) / for I-tripping Is • maximum 1s So A adjustable response value setting current (IN) / for I-tripping Is • maximum 0A Is adjustable response value setting current (IN) / for I-tripping Is • maximum 0A Is adjustable response value setting current (IN) / for I-tripping Is • maximum 0A Is adjustable response value setting current (IN) / for I-tripping Is • maximum 0A Is product function / grownding protection Without product function / grownding protection No • undercollage release No • undercollage		
• al 650 V 11.9 kÅ design of short-circuit protection For switching power values in DC networks, see the 3VA molded case circuit halper Adjustable parameters individual case circuit fink to be found under Service & Support in the last balagier product feature / for L-forping / can be switched notoff No - individual case circuit fink to be found under Service & Support in the last balagier SA - individual case circuit fink to be found under Service & Support in the last balagier SA - individual case circuit fink to be found under Service & Support in the last balagier SA - individual case circuit fink to be found under Service & Support in the last balagier SA - individual case circuit fink to be found under Service & Support in the last balagier SA - individual case circuit fink to be found under Service & Support in the last balagier SA - individual case circuit fink to balagier SO - individual case circuit fink to balagi SO - individual		
design of short-circuit protection For switching prover values in DC networks, see the 31A modded case circuit chapter Adjustable parameters product feature / for L-tripping / can be switched ontoff No adjustable response value setting current (tr) / of the Ltrip / with 12t chancelensite No adjustable response value setting current (tr) / of the Ltrip / with 12t chancelensite No adjustable response value setting current (tr) / of t-Ltripping / with 12t chancelensite No adjustable response value setting current (tr) / for L-tripping / with 12t chancelensite No adjustable response value setting current (tr) / for L-tripping / with 12t chancelensite So A adjustable response value setting current (tr) / for L-tripping / with 12t chancelensite So A adjustable response value setting current (tr) / for L-tripping / with 12t chancelensite So A adjustable response value setting current (tr) / for L-tripping / can be writhout So A adjustable response value setting current (tr) / for L-tripping / can be writhout So A adjustable response value setting current (tr) / for L-tripping / can be writhout So A adjustable response value setting current (tr) / for L-tripping / can be writhout So A product function / growting protection No writhout		
Decaker device manual; link to be found under Service & Support in the last chapter. Adjustable response value setting current (tr) / of the L-trip / with l2t characteristic No emaximum 35 A emaximum 50 A adjustable response value delay time (tr) / for L-tripping / with l2t intimum emaximum 1 s emaximum 260 A adjustable response value setting current (tr) / for L-tripping / with l2t emaximum 1 s adjustable response value setting current (tr) / for L-tripping / with l2t emaximum 260 A adjustable setting current (trin) / for H-tripping emaximum 0 A adjustable setting current (trin) / for H-tripping emaximum 0 A emaximum 0 A response value setting current (trin) / for H-tripping without product component without endersolggin Product component eudersolggin No voltage tripger No voltage tripger No height [m] 5 12 in height [n] 10 form		
product feature / for L-tripping / can be switched ontoff No adjustable response value setting current (t) / of the L-tip / with [2] characteristab 35 A • maximum 36 A adjustable response value delay time (tr) / for L-tripping / with 12t characteristab 1 s • maximum 1 s adjustable response value delay time (tr) / for L-tripping / with 12t characteristab 1 s • maximum 50 A adjustable response value setting current (ti) / for I-tripping 1 s • maximum 50 A adjustable setting current (ti) / for I-tripping 1 s • maximum 0 A • design of the N-conductor protection without product function / grounding protection No Mechanical Design No • undervoltage release No • voltage fligger No • trip infloator No height 13 mm with 1 10.16 mm depth [n] 2.76 in depth [n] 2.76 in depth [n] 11.8 mm terminal connection / for main current circuit Front terminal grangement of elec	design of short-circuit protection	breaker device manual; link to be found under Service & Support in the last
adjustable response value setting current (ir) / of the L-trip / with 12 35 A • maximum 36 A • maximum 50 A adjustable response value delay time (tr) / for L-tripping / with 12 50 A • minimum 1 s • maximum 1 s adjustable response value setting current (ii) / for L-tripping 1 s • maximum 1 s adjustable response value setting current (ii) / for I-tripping 250 A • minimum 0 A • maximum 00 A adjustable response value setting current (iii) / for I-tripping 0 A • maximum 0 A design of the K-conductor protection without product component • • undervoltage release No • voltage finger No • tip indicator No • tip indicator No • tip indicator No • depth (in) 5 12 in height (in) 1016 mm depth (in) 276 in depth (in) 276 in depth (in) 276 in depth (in) 1016 mm	Adjustable parameters	
12 dramateristic 35 A • maximum 50 A adjustable response value delay time (tr) / for L-tripping / with I2t 50 A • minimum 1 s • adjustable response value setting current (li) / for I-tripping 1 s • minimum 250 A • maximum 00 A • maximum 0 A • ontage trigger No • trip indicator No • trip indicator No • trip indicator No • trip indicator No<	product feature / for L-tripping / can be switched on/off	No
• minimum 35 A • maximum 50 A adjustable response value delay time (tr) / for L-tripping / with 12t 1 • minimum 1 s • maximum 1 s adjustable response value setting current (ii) / for I-tripping 1 s • minimum 500 A adjustable response value setting current (iii) / for I-tripping 500 A • maximum 500 A adjustable setting current (inkl) / for N-tripping 600 A • minimum 0 A • maximum 0 A design of the N-conductor protection without product function / grounding protection No Mechanical Dosign		
• maximum 50 Å adjustable response value delay time (tr) / for L-tripping / with Ict - • minimum 1 s adjustable response value setting current (li) / for I-tripping - • minimum 250 Å adjustable response value setting current (li) / for I-tripping - • maximum 0 Å adjustable setting current (lin) / for N-tripping - • maximum 0 Å - maximum 0 Å delagin of the N-conductor protection Without product function / grounding protection No Mechanical Design - product component - • undervoltage reliase No • tip indicator No • tip indicator No • tip indicator 10.6 mm despin (lin) 2.78 in despin (lin) 2.76 in despin (lin) 12.8 1 mm thermal current circuit rout keeper kit on both ends type of electrical connectors / for flab-bar 12.X 1 mm thermal current circuit rut keeper kit on both ends <td></td> <td></td>		
adjustable response value delay time (tr) / for L-tripping / with 12t • minimum • maximum 1 s adjustable response value setting current (li) / for L-tripping • minimum 500 A adjustable response value setting current (li) / for L-tripping • minimum 500 A adjustable response value setting current (li) / for L-tripping • minimum 500 A adjustable response value setting current (li) / for L-tripping • minimum 500 A adjustable response value setting current (li) / for L-tripping • minimum 0 A • maximum 0 A • undervoltage release No • voltage trigger No No No		
chiarceteristic in inimum 1 is inimum 250 A inimum 250 A inimum 250 A inimum 260 A inimum 0 A initiate setting current (InN) for N-tripping indection / grounding protection No Mechanical Design Product function / grounding protection No initiate setting current (InN) for N-tripping initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting current (InN) for N-tripping 0 A initiate setting Current (InN) for N-tripping 0 A initiate setting Current (InN) for N-tripping 0 A initiate setting Current (InN) for N-tripping 0 A initiate setting Current (InN) for N-tripping 0 A initiate setting Current (InN) for N-tripping 0 A initiate setting Current Circuit Provide testing Current (InN) for N-tripping 0 A initiate setting Current Circuit Provide testing Current Circuit Provide testing Current Circuit Provide testing Current (InN) for Flatbar 12 x 1 mm testing Current (InN) for flatbar 12 x 1 mm testing Current (InN) for flatbar 12 x 1 mm testing Current (InN) for flatbar 12 x 1 mm testing Current (InN) for flatbar 12 x 1 mm testing Current (InN) for A init Current Circuit Provide testing A (I, A, 6, 5 mm terminal current (InN) for Halper Environmental Current Circuit Provide testing S P/ on the fort terminal current Circuit Provide S P/ on the fort terminal curen		50 A
• maximum 1 s adjustable response value setting current (Ih) / for I-tripping 500 A • maximum 500 A adjustable setting current (InN) / for N-tripping 0 A • ininimum 0 A • maximum 0 A design of the N-conductor protection without product component 0 • undervoltage release No • voltage trigger No • tip indicator No height (In) 5.12 in height (In) 5.12 in height (In) 2.76 in depth fin 20 mm connections rot terminal arrangement of electrical connectors / for main current circuit Front terminal type of electrical connectors / for flat-bar 12 x 1 mm terminal connection / minimum 12 x 1 mm type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / non the op of the switch (N, 1, 5, 5) Silver depth of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Silver terminal condictos / for auxiliary cont	characteristic	
adjustable response value setting current (iii) / for I-tripping 250 A • inaximum 500 A adjustable setting current (InN) / for N-tripping 0 A • inaximum 0 A • maximum 0 A • design of the N-conductor protection without product function / grounding protection No Mechanical Design Product component • undervoltage release No • voltage trigger No height [in] 5.12 in height [in] 5.12 in height [in] 7.0 in despin of the accomectors / for main current circuit No width 101.6 mm despin 70 mm Connectores rarrangement of electrical connectors / for main current circuit type of electrical connectors / for main current circuit ront terminal type of electrical connections / for main current circuit 12 x 1 mm terminal connection / or the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) In design of the surface / of the connections / on the bottom of the switch (N, 1, 3, 5) O		
• minimum 250 A • maximum 500 A adjustable sting current (InN) / for N-tripping 0 A • maximum 0 A • maximum 0 A • maximum 0 A • maximum 0 A • design of the N-conductor protection without product function / grounding protection No Mechanical Design		1 \$
• maximum 500 A adjustable setting current (InN) / for N-tripping 0 • maximum 0 A • maximum 0 A design of the N-conductor protection without product function / grounding protection No Mechanical Design		
adjustable setting current (inN) / for N-tripping 0 A • maximum 0 A design of the N-conductor protection without product function / grounding protection No Mechanical Design • product component • • undervoltage release No • trip indicator No • trip indicator No height [in] 5.12 in height [in] 4 in width 101.6 mm depth 70 mm Connections arrangement of electrical connectors / for main current circuit type of connectable conductor cross-sections / for flat-bar 17 x 6,5 mm terminal connection / for maximum 17 x 6,5 mm terminal connection / for disc / on the bottom of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 1, 3, 5) O Accessories 0 Accessories product extension / optional / motor drive Yes Environmental conditions Predocinctable on the front product extension / optional / motor drive Yes Environmental conditions Predocincals IP / on		
		500 A
• maximum 0 A design of the N-conductor protection without product function / grounding protection No Mechanical Design	adjustable setting current (InN) / for N-tripping	
design of the N-conductor protection without product function / grounding protection No Mechanical Design Image: Construction of the surface of the	• minimum	
product function / grounding protection No Mechanical Design product component • undervoltage release No • trip indicator No height [in] 5.12 in height [in] 5.12 in height [in] 4 in width [in] 2.76 in depth [in] 2.76 in depth 70 mm Connections 70 mm arrangement of electrical connectors / for main current circuit Front terminal type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / minimum 12 x 1 mm terminal connection / minimum 17 x 6,5 mm design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the top of the switch (N, 2, 4, 6) No Avxillary circuit number of CO contacts / for auxillary contacts 0 Accessories product extension / optional / motor drive Yes Environmental conditions Yes Environmental conditions IP40 ambient temperature IP40		0 A
Machanical Design product component • undervoltage release • voltage trigger No • trip indicator No height [in] 5.12 in height [in] width [in] width 101.6 mm depth Zoria arrangement of electrical connectors / for main current circuit type of electrical connectors / for flat-bar type of electrical connections / for flat-bar type of connectable conductor cross-sections / for flat-bar terminal connection / main mum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the top of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts product extension / optional / motor drive Yes Environmental condition product extension / optional / motor drive Yes Environmental condition product extension / optional / motor drive Yes Environmental condition spiponal		without
product component • undervoltage release No • voltage trigger No • trip indicator No height [in] 5.12 in height [in] 5.12 in width [in] 4 in width [in] 4 in width [in] 2.76 in depth [in] 2.76 in depth 70 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connectors / for flat-bar 12 x 1 mm terminal connection / for flat-bar 12 x 1 mm terminal connection / main:mum Silver bype of connectable conductor cross-sections / for flat-bar 17 x 6,5 mm terminal connection / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxillary circuit number of CO contacts / for auxillary contacts 0 Accessories Product extension / optional / motor drive Yes Environmental conditions product returns 1P40 ambient temperature IP40		
• undervoltage release No • voltage trigger No • trip indicator No height [in] 5.12 in height [in] 130 mm width [in] 4 in Width 101.6 mm depth 70 in depth 70 mm Connections arrangement of electrical connectors / for main current circuit Type of electrical connection / inimimum Front terminal type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / inimimum 17 x 6,5 mm design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the top of the switch (N, 2, 4, 6) Tin Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories 0 Accessories product extension / optional / motor drive Yes Environmental conditions product set for an the front IP40 ambient temperature IP40 IP40		No
• voltage trigger No • trip indicator No height [in] 5.12 in height [in] 130 mm width [in] 4 in width [in] 2.76 in depth [in] 2.76 in depth 70 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connectors / for main current circuit Front terminal type of electrical connectors / for flat-bar 12 x 1 mm terminal connection / minimum 17 x 6,5 mm terminal connection / minimum Trop of the surface / of the connections / on the top of the surface / of the connections / on the top of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Silver AxxIIIary circuit number of CO contacts / for auxiliary contacts 0 Axcessories 0 Accessories product extension / optional / motor drive Yes Environmental conditions product extension / optional / motor drive Yes Environmental conditions product extension / optional / motor drive Yes Environmental conditions product extension / optional / motor drive Yes Envi	Mechanical Design	No
• trip indicator No height [in] 5.12 in height 130 mm width [in] 4 in width 101.6 mm depth [in] 2.76 in depth 70 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connectors / for main current circuit Front terminal type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / maintum Silver type of connectable conductor cross-sections / for flat-bar 17 x 6,5 mm terminal connection / maintum Silver silver Silver witch (N, 2, 4, 6) Tin Axcessories 0 Accessories 0 product extension / optional / motor drive Yes Ervironmental conditions Protocratis product extension / optional / motor drive Yes Ervironmental conditions IP40 ambient temperature IP40	Mechanical Design	No
height 5.12 in height 130 mm width [in] 4 in width 101.6 mm depth 70 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Front terminal type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / minimum 17 x 6,5 mm type of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes Environmental conditions Protection class IP / on the front IP40	Mechanical Design product component	
height 130 mm width [in] 4 in width 101.6 mm depth 101.6 mm depth 70 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connectors / for main current circuit Front terminal type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / minimum 17 x 6,5 mm terminal connection / maximum Silver design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger	No
width [in] 4 in width 101.6 mm depth 101.6 mm depth 70 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Front terminal type of electrical conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / maximum 12 x 4 mm design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 1, 2, 4, 6) Tin Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger	No No No
width 101.6 mm depth [in] 2.76 in depth 70 mm Connections arrangement of electrical connectors / for main current circuit Front terminal type of electrical connection / for main current circuit nut keeper kit on both ends type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / minimum 17 x 6,5 mm terminal connection / maximum 17 x 6,5 mm design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 1, 3, 5) Tin Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories 0 Accessories product extension / optional / motor drive Yes Yes Environmental conditions IP40 ambient temperature	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator	No No No
depth [in] 2.76 in depth 70 mm Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Front terminal type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / maximum 17 x 6,5 mm design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in]	No No 5.12 in
depth 70 mm Connections arrangement of electrical connectors / for main current circuit Front terminal type of electrical connection / for main current circuit nut keeper kit on both ends type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / minimum 17 x 6,5 mm terminal connection / maximum Silver design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in]	No No 5.12 in 130 mm 4 in
Connections arrangement of electrical connectors / for main current circuit Front terminal type of electrical connection / for main current circuit nut keeper kit on both ends type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / minimum 17 x 6,5 mm terminal connection / main mum 17 x 6,5 mm design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxiliary circuit 0 number of CO contacts / for auxiliary contacts 0 Accessories Yes product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in]	No No 5.12 in 130 mm 4 in 101.6 mm
arrangement of electrical connectors / for main current circuit Front terminal type of electrical connection / for main current circuit nut keeper kit on both ends type of connectable conductor cross-sections / for flat-bar 12 x 1 mm terminal connection / minimum 12 x 6,5 mm terminal connection / maximum 17 x 6,5 mm design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] width [in] width	No No 5.12 in 130 mm 4 in 101.6 mm
type of electrical connection / for main current circuit nut keeper kit on both ends type of connectable conductor cross-sections / for flat-bar 12 x 1 mm type of connectable conductor cross-sections / for flat-bar 17 x 6,5 mm terminal connection / maximum 17 x 6,5 mm design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxiliary circuit 0 number of CO contacts / for auxiliary contacts 0 Accessories Ves product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in]	No No S.12 in 130 mm 4 in 101.6 mm 2.76 in
type of connectable conductor cross-sections / for flat-bar 12 x 1 mm type of connectable conductor cross-sections / for flat-bar 17 x 6,5 mm terminal connection / maximum 17 x 6,5 mm design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) Silver design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxiliary circuit 0 number of CO contacts / for auxiliary contacts 0 Accessories Ves product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in]	No No S.12 in 130 mm 4 in 101.6 mm 2.76 in
terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories product extension / optional / motor drive Protection class IP / on the front ambient temperature	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxiliary circuit Tin number of CO contacts / for auxiliary contacts 0 Accessories 0 product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
switch (N, 1, 3, 5) Image: switch (N, 2, 4, 6) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Tin Auxiliary circuit Image: switch (N, 2, 4, 6) number of CO contacts / for auxiliary contacts 0 Accessories Image: switch (N, 2, 4, 6) product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar	No No So S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends
switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts 0 Accessories 0 product extension / optional / motor drive Yes Environmental conditions 1P40 ambient temperature 1P40	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm
number of CO contacts / for auxiliary contacts 0 Accessories	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the	No No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm
Accessories product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
product extension / optional / motor drive Yes Environmental conditions IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	No No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
Environmental conditions protection class IP / on the front IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
protection class IP / on the front IP40 ambient temperature IP40	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
ambient temperature	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No No Solution 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0
	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	No No Solution 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0
• during operation / minimum -25 °C	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions	No No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0 Yes
	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	No No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0 Yes
• during operation / maximum 70 °C	Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0 Yes IP40

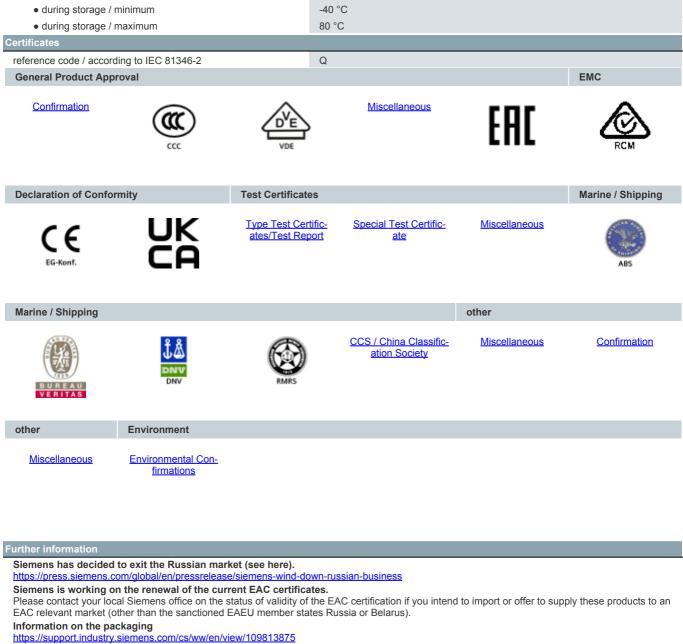

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1150-3EF42-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA1150-3EF42-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1150-3EF42-0AA0


CAx-Online-Generator


http://www.siemens.com/cax

Tender specifications


http://www.siemens.com/specifications



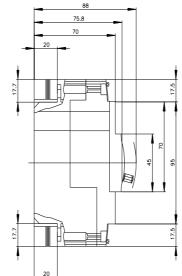

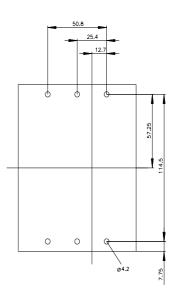

 12.7

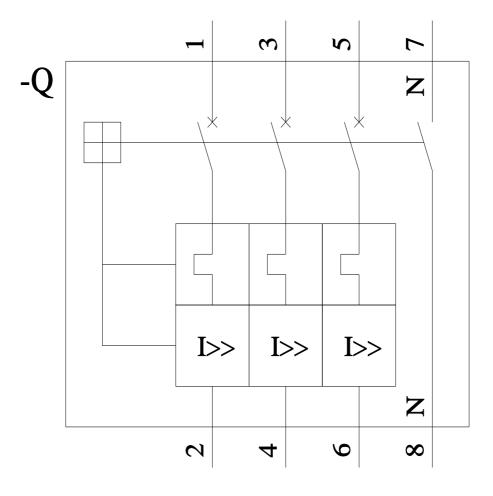

8/10/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3VA11503EF420AA0