SIEMENS

Data sheet

3VA2125-6HM32-0AA0



circuit breaker 3VA2 IEC frame 160 breaking capacity class H Icu=85kA @ 415V 3-pole, line protection ETU330, LIG, In=25A overload protection Ir=10A...25A short-circuit protection Ii=1.5...12 x In ground-fault protection Ig=0.6... 1 x In, tg=0.1/0.3s nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	ETU330
protection function of the overcurrent release	LIG
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	0.6 W
power loss $[W]$ / for rated value of the current / at AC / in hot operating state / per pole	0.2 W
mechanical service life (operating cycles) / typical	25 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	14 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	9 800
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Summation current formation L-conductor
product function	
 communication function 	No
other measurement function	No
Net Weight	2.5 kg
Current	
operational current	
• at 40 °C	25 A
● at 45 °C	25 A
● at 50 °C	25 A
● at 55 °C	25 A
• at 60 °C	25 A
● at 65 °C	25 A
• at 70 °C	25 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	Н
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	110 kA
• at 415 V	85 kA
• at 440 V	85 kA
• at 500 V	55 kA
• at 690 V	2.5 kA
operating short-circuit current breaking capacity (Ics)	

• at 240 V	110 kA
• at 415 V	85 kA
● at 440 V	85 kA
● at 500 V	55 kA
• at 690 V	2.5 kA
short-circuit current making capacity (Icm)	
• at 240 V	242 kA
• at 415 V	187 kA
• at 440 V	187 kA
• at 500 V	121 kA
• at 690 V	3.7 kA
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic	
• minimum	10 A
• maximum	25 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
● minimum	0.5 s
● maximum	17 s
adjustable response value setting current (li) / for I-tripping	
• minimum	38 A
● maximum	300 A
adjustable current response value current / for G-tripping / with standard characteristic	
● initial value	15 A
full-scale value	25 A
adjustable response value delay time (tg) / for G-tripping / with l0t characteristic	
• maximum	0.3 s
adjustable setting current (InN) / for N-tripping	
• minimum	0 A
• maximum	0 A
product function / grounding protection	Yes
Mechanical Design	
product component	
 undervoltage release 	No
voltage trigger	No
trip indicator	No
height [in]	7.13 in
height	181 mm
width [in]	
woon [in]	4.13 in
width	4.13 in 105 mm
width	105 mm
width depth [in]	105 mm 3.39 in
width depth [in] depth	105 mm 3.39 in
width depth [in] depth Connections	105 mm 3.39 in 86 mm
width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	105 mm 3.39 in 86 mm Front terminal
width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar	105 mm 3.39 in 86 mm Front terminal on both sides nut keeper kit
width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar	105 mm 3.39 in 86 mm Front terminal on both sides nut keeper kit 13 x 1 mm
width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	105 mm 3.39 in 86 mm Front terminal on both sides nut keeper kit 13 x 1 mm 25 x 8 mm
width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	105 mm 3.39 in 86 mm Front terminal on both sides nut keeper kit 13 x 1 mm 25 x 8 mm tin tin
width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	105 mm 3.39 in 86 mm Front terminal on both sides nut keeper kit 13 x 1 mm 25 x 8 mm tin
width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	105 mm 3.39 in 86 mm Front terminal on both sides nut keeper kit 13 x 1 mm 25 x 8 mm tin 0
width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	105 mm 3.39 in 86 mm Front terminal on both sides nut keeper kit 13 x 1 mm 25 x 8 mm tin tin
width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	105 mm 3.39 in 86 mm Front terminal on both sides nut keeper kit 13 x 1 mm 25 x 8 mm tin 0

ambient temperature					
 during operation 	/ minimum	-25 °C	C		
 during operation 	/ maximum	70 °C	;		
 during storage / r 	ninimum	-40 °C	0		
 during storage / r 	maximum	80 °C	;		
Certificates					
reference code / according to IEC 81346-2		Q			
General Product Approval					EMC
	<u>Confirmation</u>		<u>Miscellaneous</u>	EHC	RCM
Declaration of Confor	mity	Test Certificates			Marine / Shipping
UK CA	CE EG-Konf.	<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Certific-</u> ates/Test Report	<u>Miscellaneous</u>	ABS
Marine / Shipping			other		
BUREAU VERITAS		<u>CCS / China Classific-</u> ation Society	<u>Confirmation</u>	<u>Miscellaneous</u>	<u>Miscellaneous</u>
Dangerous Good	Environment				
Transport Information	Environmental Con- firmations				

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2125-6HM32-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA2125-6HM32-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2125-6HM32-0AA0


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications









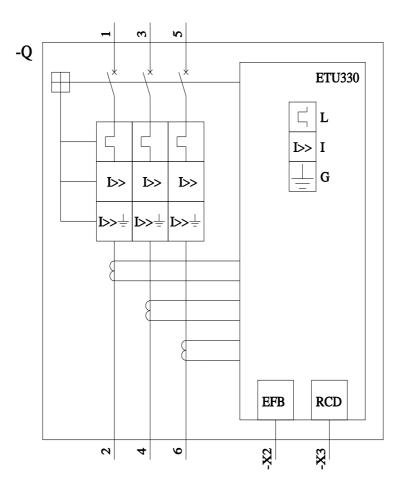

7/19/2022 🖸

Subject to change without notice © Copyright Siemens

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3VA21256HM320AA0